2026

elica

Extraordinary Cooking.

Being extraordinary is a mindset, a way of being and thinking.



IT'S BEING INVENTIVE, IT'S EMBRACING A PIONEERING SPIRIT; IT'S AN ENGINE THAT IGNITES EVERY DAY WITH NEW IDEAS, OPPORTUNITIES, AND EXPERIMENTS.

FOR US, BEING EXTRAORDINARY HAS NOTHING TO DO WITH BEING ECCENTRIC, ELITIST, OR UNCONVENTIONAL AT ALL COSTS.

IT'S ABOUT THINKING OUTSIDE THE BOX, CREATING BEAUTY, VALUE, AND DELIVERING INCREASINGLY FUNCTIONAL, USER-FRIENDLY PRODUCTS.

BEING EXTRAORDINARY IS THE ART OF INVENTING THE FUTURE: IN THE KITCHEN AND IN LIFE.

Index

The company 12
Making History 14
Design Awards 16
Beyond 20

1 **Elica Cooking Systems** **22**
Elica Cooking Collection. 24
Black Matt - RAW Finishing 26
Dropless. 30
Connex™. 32
Product features. 34

2 **Lhov** **40**
The first All-in-One cooking solution. 42
All the advantages, in detail. 44
Installation and accessories. 50


Lhov 48

3 **Luna** **58**


Luna 60

4 NikolaTesla 64

Accessories. 116
Comparative table. 118

4.1 NikolaTesla Evo Collection 66

All the advantages, in detail. 68
Installation and pipes NikolaTesla Evo. 88
Technical drawings. 90



NikolaTesla One HP 70


NikolaTesla Unplugged 72


NikolaTesla Switch Glow 76


NikolaTesla Switch 80


NikolaTesla One 82


NikolaTesla Libra 84


NikolaTesla Flame 86


4.2 NikolaTesla Suit S Collection 92

All the advantages, in detail. 94
Installation and pipes NikolaTesla Suit S. 112
Technical drawings. 114


NikolaTesla Fit XL 96


NikolaTesla Fit 100


NikolaTesla Fit 3Z 104



NikolaTesla Prime S + 108


NikolaTesla Velvet 110


5 Induction Hobs 120

Technical drawings. 138
Comparative table. 140

5.1 Induction Hobs Ratio Connex 122



Ratio Connex 905 Plus 124



Ratio Connex 804 Plus 126



Ratio Connex 803 Plus 128



Ratio Connex 604 Plus 129




Ratio Connex 603 Plus 130



Ratio Connex 302 Plus 131


5.2 Induction Hobs Primis 132



Primis 804 Plus 134



Primis 604 Plus 136



Primis 603 137



Primis 302 137

6 Hoods 142

General accessories 326

6.1 Hoods / Special Selection 144

Technical drawings. 168

Accessories. 170



Ikona 164



Ikona Light 165



Ikona Maxxi Pure 160



TheKub Island 148



TheKub Suspended 149



TheKub Wall 147



Nuage 166



Open Suite 156



Open Suite Superior 152

6.2 Hoods / Wall-mounted 172

Technical drawings. 168

Comparative table. 226


Adéle 210


Aplomb 181


Bio 204


Bloom 183


Bloom-S 182


Coraline 218


Element 206


Haiku 198


Haiku Dry 202


Joy 213


Just Dry 194


L'Essenza 196


Lol 212


Majestic 188


Majestic No Drip 186


Memphis 218


Mensola 219


Missy 217


Neat 189


Om Air 174


Oretta 219


Plat 180


Regula 214


Rift 184


Rules 176


Shire 197


Shy-S 197


Spot Ng 215



Stone 216



Stripe 193



Stripe A 192



Stripe No Drip 190



Super Plat 178



Sweet 208



Tamaya 2.0 Rail 217



Tube Pro 216

6.3 Hoods / Island 230

Technical drawings. 246

Comparative table. 248



Adéle Island 240



Bio Island 237



Element Island 238



Galaxy Island 242



Haiku Island 232



Haiku Dry Island 236



Joy Island 243



Reef Island 244



Spot Plus Island 244



Tribe Island 245



Tube Pro Island 245

6.4 Hoods / Ceiling 250


Technical drawings. 264
Charcoal filters kit. 266
S.E.I System and comparative table. 268



Cloud Seven 262



Hilight Glass 258




Hilight-X 260



Illusion 254



Lullaby 252



Skydome 256

6.5 Hoods / Suspended 270

Technical drawings. 282
Comparative table. 283



Easy UX 279



Édith 276



Interstellar 272



Juno S 281



Pix 280



Seashell 274



Shining 275



Wave UX 278

6.6 Hoods / Downdraft 284

Optional pipes. 292
Technical drawings. 293



Getup 286



Pandora 290

6.7 Hoods / Built-in without cabinet base 294

Technical drawings. 320
Comparative table. 323



Boxin 300



Boxin Advance Dry 298



Boxin Easy Dry 299



Boxin No Drip 2.0 296



Ciak 2.0 304



Ciak 2.0 S 303



Elite 14 307



Elite 26 306



Elite 35 305



Glass Out 301



Lever 302

6.8 Hoods / Built-in with cabinet base 308

Technical drawings. 320

Comparative table. 324


Ct35 Pro 313


Era 317


Era C 317


Era S 316


Fold 315


Fold S 314


Hidden 2.0 312


Hidden Advance Plus 310


Lane 319


Lane Sensor 318

7 Ovens 338


All the advantages, in detail. 340

Microwave Ovens. All the advantages, in detail. 354

Accessories. 359

Technical drawings and Comparative table. 360


Virtus Combi Steam MW 645 TFT 342



Virtus Multi Pyro 60 TFT 346


Virtus Multi 90 TFT 348


Virtus Multi 60 DD 350


Virtus Combi Microwave 645 356


Virtus Microwave 638 357


Virtus Warm Drawer 358

8 Wine Coolers 362

All the advantages, in detail. 364
Technical drawings e Comparative table. 372



Veritas BI660 366



Veritas BI645 367



Veritas BU682 368



Veritas BU382 369

9 Elica for you 374

Warranty. 376
Maintenance. 378
Energy Label. Examples and energy class scale by product category. 379

A company, a forward



Corporate Awards

Top Employer

Recognises companies that provide excellent working conditions, based on an HR Best Practices Survey.

Best Managed Companies

It recognizes outstanding entrepreneurial excellence in Made in Italy.

Premio Etica e Impresa

It rewards companies that integrate social responsibility, sustainability, and ethics into their business model, promoting virtuous practices.

Cultura + Impresa

Won by the Ermanno Casoli Foundation and Elica for the E-STRAORDINARIO project.

a group, going enterprise.

Italian company standing at the forefront of cooking appliance production and design.

TODAY ELICA IS AN INDUSTRIAL GROUP LISTED ON THE STOCK EXCHANGE. IT IS PRESENT IN MORE THAN 100 MARKETS WORLDWIDE, WITH 2,600 EMPLOYEES AND 6 PRODUCTION SITES IN ITALY, POLAND, MEXICO AND CHINA.

IT IS A CUTTING-EDGE COMPANY SPECIALISED IN THE PRODUCTION OF KITCHEN EXTRACTION SYSTEMS, HOBS, OVENS, AND WINE COOLERS, ALL OF WHICH ARE RENOWNED FOR THEIR DISTINCTIVE DESIGN AND INNOVATIVE FEATURES.

IT IS A LEADER IN KITCHEN HOODS AND A EUROPEAN REFERENCE IN THE ELECTRIC MOTORS SEGMENT FOR HOUSEHOLD APPLIANCES AND BOILERS.

Marchio storico

It identifies products that embody the very essence of Made in Italy and have become symbols of Italian excellence and style around the world.

Premio dei Premi

Created by the Office of the Italian Prime Minister, this is a national award for innovative companies.

Imprese x Innovazione

Promotes the spread of a 360° innovation culture.

Gazele Biznesu

Award granted by the Puls Biznesu newspaper for companies with the most dynamic development in Poland.

Premio Leonardo

Dedicated to entrepreneurs and companies distinguished by high-quality product innovation and a strong international, commercial and manufacturing presence.

Merito Empresarial

Award received for the excellence of our products made and services rendered in Querétaro, México.

Making History

2007



Missy
The first chimney style hood.

2008



Space
At launch, Elica's quietest hood.

2010



Feel
The smart hood, thanks to sensor technology.



Bubble
The first hood made of technopolymers.

2014




Bio
The first natural wood hood.




Ye
The first sculpture-like hood.

2016

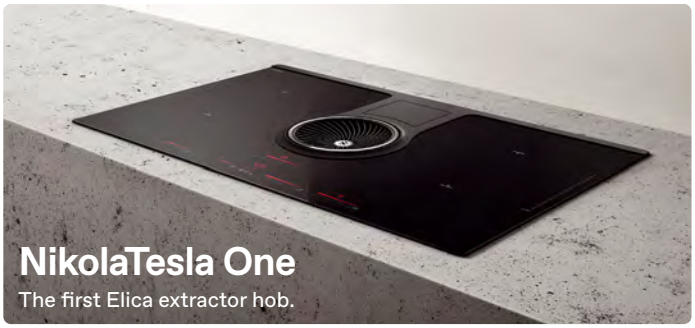

NikolaTesla One
The first Elica extractor hob.

2021

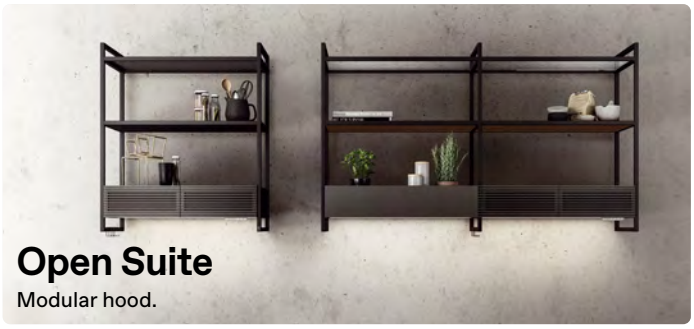

Open Suite
Modular hood.

2022



Ikona Maxxi Pure
Hood with integrated air purifier.



NikolaTesla Unplugged
Extractor hob with touch and feel knobs.

1972



Elica presents its first hood.

1982



Lego
The customisable hood with interchangeable front panels.

2004



Om
First vertical hood.

2006



Star
The first, most iconic lamp hood.

2012



35CC
The first hood in a mere 35 centimetres.



Sweet
The timeless hood with a modern twist.

2018



Haiku
Unique design chimney hood.




NikolaTesla Libra
The first extractor hob with integrated scale.

2020




NikolaTesla Flame
The first gas extractor hob.

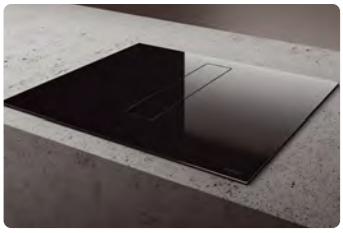

NikolaTesla Fit
The extractor hob in a mere 60 centimetres.

2023

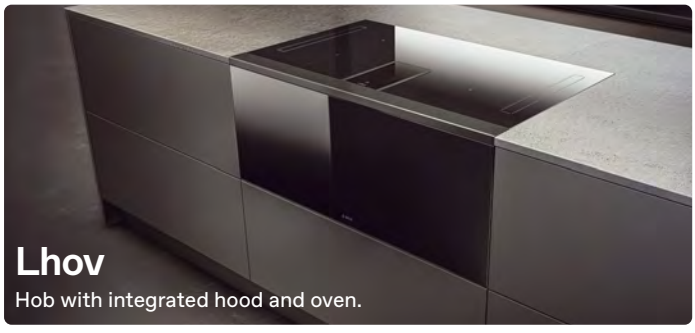

Lhov
Hob with integrated hood and oven.

2024



Virtus Multi DD
An oven with an iconic design.

Compasso d’Oro ADI

2024	Lhov
2018	NikolaTesla One

Menzione d’Onore Compasso d’Oro

2025	Lhov
2018	Snap
2016	Nuage
2014	35cc

Compasso d’Oro International

2025	Lhov


Premio Per l’Innovazione ADI Design Index

2023	Lhov

Premio Nazionale per l’Innovazione

2024	Lhov

Design Awards

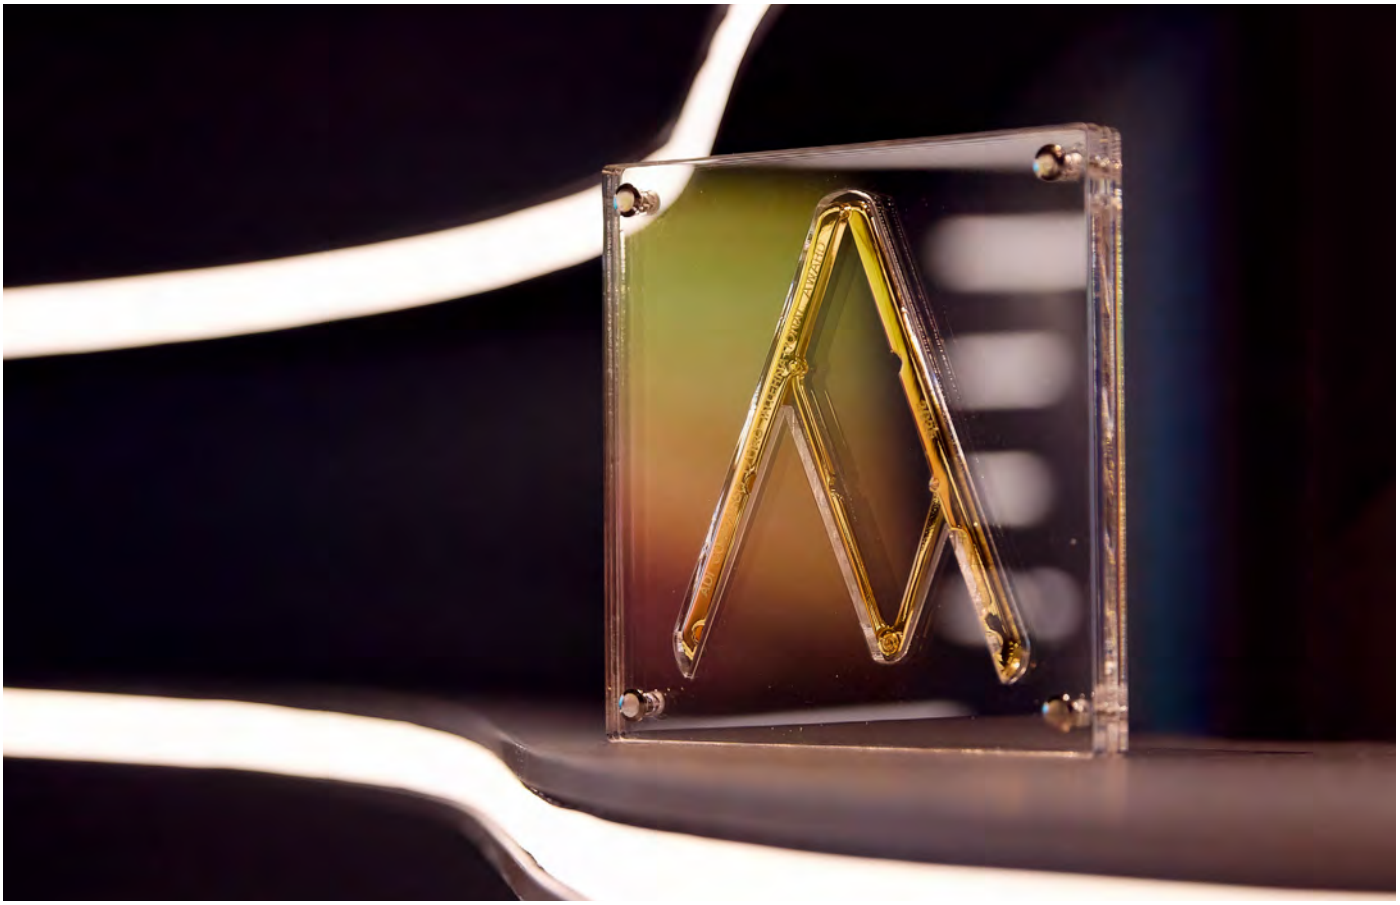

ADI Design Index

2025	Element
2023	Lhov
	NikolaTesla Unplugged
	Ikona Maxxi Pure
2016	NikolaTesla One
	Snap
2015	Nuage
2013	35cc
2007	Evolution System (Ola, Star, Wave, Platinum, Twin, Isola Bella, Cube Light)
2004	Om

Red Dot Design Award

2026	Linea Virtus
2023	Lhov
	NikolaTesla Unplugged
2021	Rules
	Super Plat
2017	NikolaTesla One
	Bio
	Summilux
2016	Nuage
2015	Édith
2013	Tiffany
	Sweet
2012	35cc
	Clip
2011	Skin

IF Design Award

2023	Lhov
	NikolaTesla Unplugged
2022	Ikona Maxxi Pure
2021	NikolaTesla Fit
	Open Suite
	Super Plat
	Rules
2020	NikolaTesla Libra
2019	NikolaTesla Switch
	NikolaTesla Switch Glow
2017	Bio
	Summilux
2016	Top Class
	Ye
	Nuage
2015	Édith
2013	Tiffany
	Sweet

German Design Award

2026	Linea Virtus
2025	Element
	Virtus Multi DD
2024	Lhov
2023	NikolaTesla Unplugged
	Ikona Maxxi Pure
2022	Open Suite
	Rules
2020	NikolaTesla Libra
	NikolaTesla Switch
	NikolaTesla Switch Glow
	NikolaTesla Flame
2019	Lullaby
	Haiku
	Majestic
2013	Skin

Good Design

2025	Linea Virtus
2024	Lhov
2022	NikolaTesla Unplugged
2021	NikolaTesla Fit
	Open Suite
	Ikona Maxxi Pure
	Rules
2020	NikolaTesla Libra
	NikolaTesla Flame
2019	NikolaTesla Switch
	NikolaTesla Switch Glow
	Lullaby
	Haiku
2016	Bio
	Summilux
	NikolaTesla One
2015	Snap
	Édith
	Ye
2012	Tiffany
	35cc
2008	Ola

IDA Design Awards

2025	Linea Virtus
2022	Lhov
	NikolaTesla Unplugged
2020	Rules
	Open Suite
	Super Plat
2018	NikolaTesla Libra
	NikolaTesla Flame
2017	Lullaby
	Haiku
	NikolaTesla Switch
	NikolaTesla Switch Glow
2016	NikolaTesla One
2015	Interstellar
	Concetto Spaziale
	Bio
	Summilux
	Ye
2014	Marie
	Nuage
	Snap

International Design Excellence Awards

2025	Lhov
	Linea Virtus
2019	NikolaTesla Libra
	NikolaTesla Flame
2018	NikolaTesla Switch
	NikolaTesla Switch Glow
	Lullaby
2017	NikolaTesla One
	Summilux

German Innovation Award

2026	Luna
2023	Lhov
2022	Ikona Maxxi Pure
2021	NikolaTesla Fit
	Open Suite
	Rules
2019	NikolaTesla Flame
	NikolaTesla Libra
	Haiku

Architizer A+ Awards

2026	TheKub (finalist)
	Luna (finalist)
2024	Lhov
2022	NikolaTesla Unplugged (finalist)
2021	NikolaTesla Fit
	Open Suite
	Rules
2019	NikolaTesla Libra
	Pix
	Lullaby

European Product Design Award

2025	Linea Virtus
2024	Element
2023	Lhov
2021	NikolaTesla Fit
	Rules
	Open Suite
	Super Plat
2019	NikolaTesla Libra
	NikolaTesla Flame
2018	NikolaTesla Switch
	NikolaTesla Switch Glow
	Haiku
	Lullaby
2017	NikolaTesla One
	Summilux
	Bio

A'Design Award

2026	Element
	Luna
	TheKub
	Linea Virtus
2024	Lhov
2023	NikolaTesla Unplugged
2022	Ikona Maxxi Pure
2021	NikolaTesla Fit
	Open Suite
2019	NikolaTesla Switch
	NikolaTesla Switch Glow
	Haiku

Iconic Awards Innovative Interior

2025	Element
	Linea Virtus
2023	Lhov
2021	NikolaTesla Fit
	Rules
2020	NikolaTesla Flame
2019	NikolaTesla Switch
	NikolaTesla Switch Glow
	NikolaTesla Libra
	Lullaby
	Haiku
2017	NikolaTesla One
	Bio
	Summilux
2016	Snap
	Nuage
	Édith

Designer Awards

2021	Rules (longlisted)
2017	Bio
2016	NikolaTesla One
	Snap
2015	Ye

Archiproducts Design Awards

2025	NikolaTesla Switch Glow RAW
2024	Element
2023	Virtus Multi 60 DD (Special Range 2023)
2022	Lhov
	NikolaTesla Unplugged (Longlist)
2021	Open Suite
2020	Rules
2019	NikolaTesla Flame
2018	NikolaTesla Libra

Plus X Award

2026	Element
	Luna
2025	Lhov
2022	NikolaTesla Unplugged
2021	NikolaTesla Fit
2019	NikolaTesla Switch
	NikolaTesla Switch Glow
	NikolaTesla Libra
	NikolaTesla Flame
	NikolaTesla One
	NikolaTesla Prime

Best of Design

2022	NikolaTesla Unplugged

Design Intelligence Award

2021	NikolaTesla Switch
	NikolaTesla Switch Glow

NYC X Design Awards

2021	NikolaTesla Switch
	NikolaTesla Switch Glow

Big See Award

2026	Element
2025	Linea Virtus
2024	Open Suite
2023	Lhov
	NikolaTesla Fit 3Z
2022	NikolaTesla Unplugged
2021	NikolaTesla Fit

Kitchen Innovation Award

2023	NikolaTesla Unplugged
2022	Ikona Maxxi Pure
2021	Open Suite
2020	NikolaTesla Libra

Iconic Awards Innovative Architecture

2022	NikolaTesla Unplugged

Esprit Meuble's Innovation Awards

2024	Lhov
2022	NikolaTesla Fit 3Z

SBID International Design Awards

2024	Lhov
2022	NikolaTesla Unplugged

Best of Year

2024	Lhov
2021	Open Suite

New York Product Design Award

2026	Luna
	TheKub
2025	Lhov
2022	NikolaTesla Unplugged

Interior Innovation Awards

2014	Sweet

DFA Awards

2021	Haiku

Brand Awards

Kitchen Innovation Awards

2023	Favourite Brand

Plus X Award

2025	Best brand of the year
2023	Best brand of the year

Beyond

**Beyond what exists.
Beyond conventional limits, beyond standards and clichés. This is innovation: the Elica way.**



A passionate, practical approach that defies the rules with expertise, research and technology.
That improves everyone's daily life with easy-to-use, cutting-edge solutions. That develops business by exploring novel solutions and new market opportunities.

Innovation is visionary and it is pragmatic. It looks to the stars and has its feet firmly on the ground. It comes to life in intentions and intuitions, but also in facts and figures.

Otherwise, it does not exist.

179

Products

12

Extraction systems

105

Components

9

Installation solutions

9

Noise reduction solutions

Elica Propulsion Laboratory

This is the centre where we certify innovative products that comply with safety, energy saving and electromagnetic compatibility regulations.

EPL is a UNI EN/IEC ISO 17025 certified facility and is organised as a technological hub for research, testing and certification of materials, components and finished products.

It features state-of-the-art technology and is staffed by a team of electrical, mechanical and physical engineers, electrotechnical and chemical experts. Test areas cover electrical and mechanical safety, energy efficiency, noise analysis and measurement, electromagnetic compatibility, and the reliability of materials, components and finished products.



Patents

By 31 December 2025, we had filed 898 patents: 341 technical, 557 design. Figures that motivate us to continue devoting energy, fuelling our quest to achieve even greater accomplishments.



Elica Cooking Systems

Cooking, Black Matt, Dropless, Connex: Elica's vision takes shape in a collection that complements every architecture and kitchen style.

Integrated systems, technological solutions and tactile finishes come together to offer maximum design freedom. For Elica, innovation is not an achievement but a continuous evolution that redefines the cooking experience.

elica

1

Elica Cooking Collection.
The complete range for your kitchen.

Elica offers a complete range of cooking appliances, designed to enhance every kitchen space by combining innovative functionality with an unmistakable style.

Distinctive design, intelligent and intuitive functions, and attention to quality are the common denominators of every product. Available in a wide variety of sizes, finishes and materials, they make it possible to create tailored environments.



One space, endless possibilities.

Lhov

The first All-in-One cooking solution combining oven, induction hob and extraction system in a single product. Award-winning design and revolutionary cooking and extraction functions for innovation beyond every standard.

Extraction systems

Design solutions for island, wall or built-in installations, available in different finishes, connected or with anti-condensation systems. Whatever hood you imagine, Elica offers it.

NikolaTesla extractor hobs

Design freedom and kitchen ergonomics with the widest range of hobs with integrated extraction on the market. Integration, versatility, unique design and cutting-edge performance.”

Induction hobs

Different sizes, configurations and finishes to suit every kitchen. Simple and intuitive, they communicate with Elica hoods to automatically adjust extraction.

Luna

The suspended lamp that enhances the space and accompanies every gesture in the kitchen. Essential in design, natural in interaction, it pairs perfectly with LHOV and extractor hobs.

Virtus ovens

Ovens with a distinctive design, available in multiple sizes: standard, compact and extra-large. Up to 320°, multifunction and steam-combined. Matching microwaves and warming drawers for a complete set.

Veritas wine coolers

Available in different sizes, as column or base units, they are the perfect complement to Elica appliances. They ensure optimal storage even for the finest wines, with a design perfectly aligned with the kitchen.








Black Matt.

The finish that makes the kitchen extraordinary.

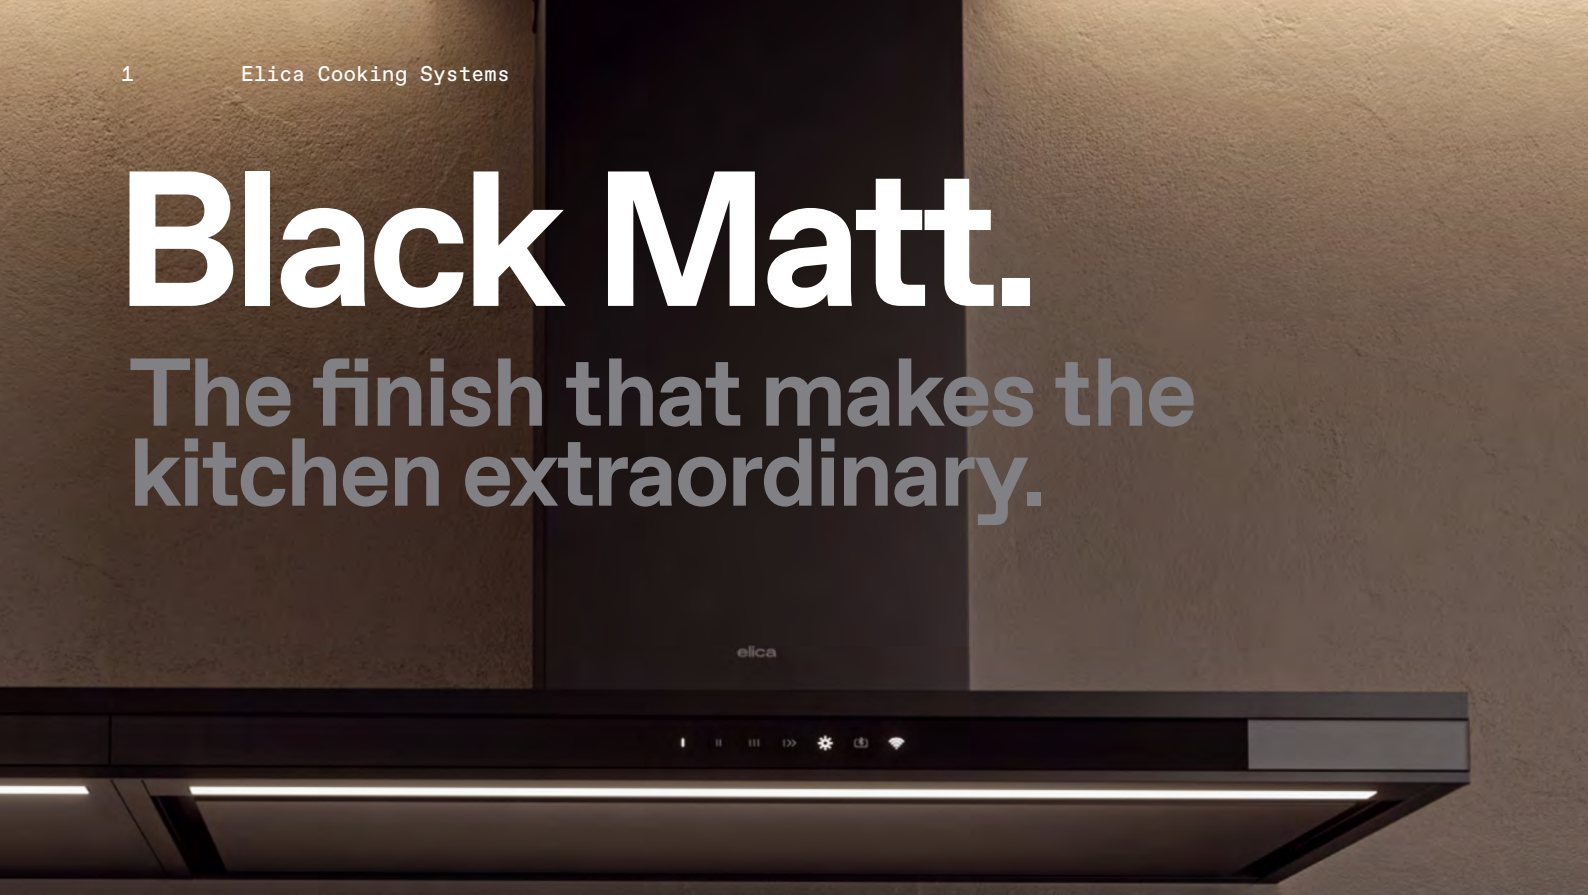

Black Matt finish introduces a sophisticated and minimalist style with a remarkable visual impact. A look&feel that blends seamlessly into the kitchen environment. Elegance, contemporaneity and versatility distinguish its aesthetics. Available in a wide range of hob, hood and oven models.

For Lhov and hobs, beauty is not the only advantage: it is accompanied by additional functional benefits. Those of the **Raw finish.**



Available in a wide range of hob, hood and oven models.





The same style throughout the kitchen.

A finish with a captivating aesthetic and distinctive character, reducing reflections and making surfaces easier to clean. A signature feature achieved through special coatings or glass finishes, coordinating hoods, ovens and the Luna lamp in one unmistakable kitchen style.

Available for:

Hoods

- TheKub
- Open Suite / Open Suite Superior
- Ikona Maxxi Pure / Ikona / Ikona Light
- Rift
- Stripe A
- Just Dry
- Haiku / Haiku Island
- Haiku Dry / Haiku Dry Island
- Bio / Bio Island
- Element / Element Island
- Sweet
- Adéle / Adéle Island
- Joy
- Lol
- Regula
- Tube Pro / Tube Pro Island
- Illusion
- Hilight-X
- Seashell
- Édith
- Pix
- Wave UX
- Easy UX
- Getup
- Boxin No Drip 2.0
- Boxin Advance Dry
- Boxin Easy Dry
- Boxin LX
- Hidden 2.0
- Lane / Lane Sensor
- Fold

Ovens

- Virtus Combi Steam MW 645 TFT
- Virtus Multi Pyro TFT
- Virtus Multi DD
- Virtus Warm Drawer

Lamp

- Luna

RAW Finishing.
Innovation, style and functionality in a single solution.

Available for:


Lhov	NikolaTesla	Ratio Connex	Primis
	NikolaTesla One HP	Ratio Connex 905 Plus	Primis 804 Plus
	NikolaTesla Unplugged	Ratio Connex 804 Plus	Primis 604
	NikolaTesla Switch Glow	Ratio Connex 604 Plus	Primis 603
	NikolaTesla One	Ratio Connex 603 Plus	
	NikolaTesla Fit XL		
	NikolaTesla Fit		
	NikolaTesla Prime S+		

Scratch Resistant

Easy clean

Fingerprint protection

Black Matt Finish

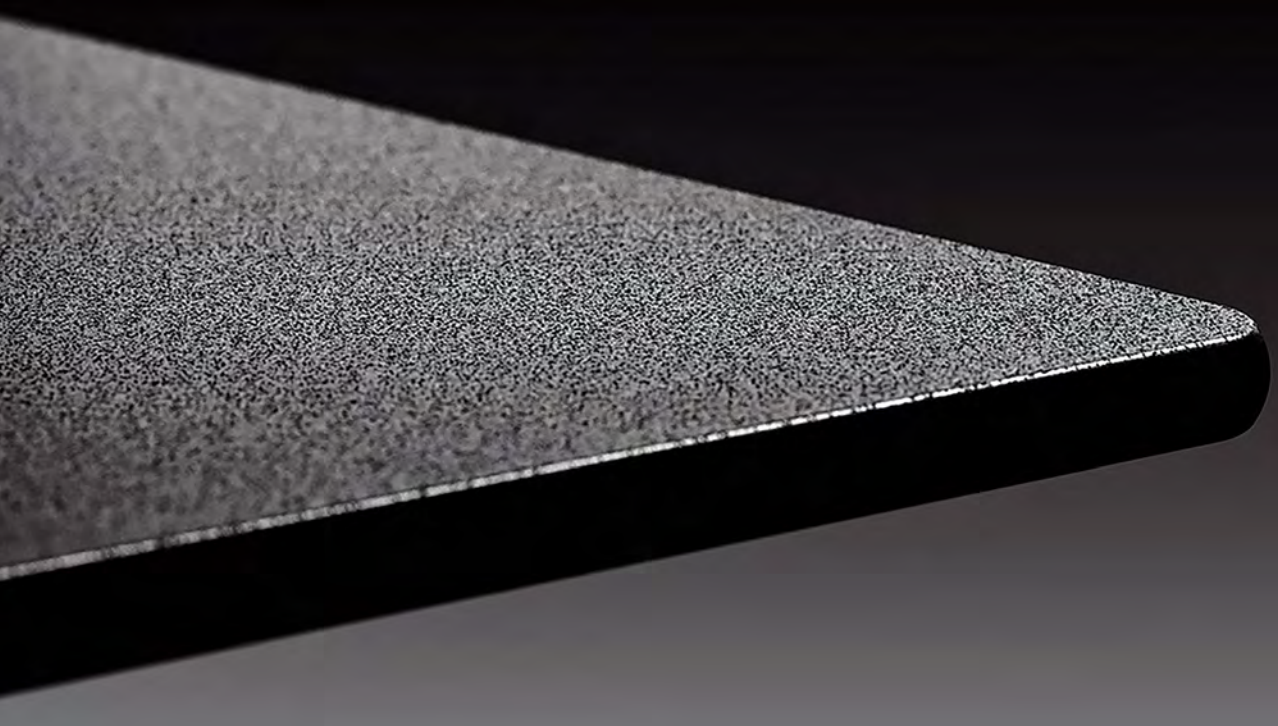



When aesthetics meet functionality.

The Raw finish enhances Lhov, extractor hobs and Elica induction hobs with an unprecedented aesthetic, adding further character to already iconic models.

The matt glass enhances the minimalist lines of Elica design, for pleasant everyday use. The surface resists marks from pots and utensils and is designed to make fingerprints less visible.
In addition, cleaning is very practical: stains and residues can be removed easily.

Dropless.
Solutions against condensation and drips.

No Drip System

This solution features special heating elements concealed within the hood that keep the surface warm, limiting steam deposits and the formation of condensation. Any residual steam is captured by the inclined filter grids, which channel the droplets into a dedicated container that can be emptied with ease. In built-in hoods, the front visor also helps protect cabinet doors and wall units.





Available for:

- Stripe No Drip
- Majestic No Drip
- Boxin No Drip 2.0

Too much condensation and vapour? Now under control.

One of the main issues with using an induction hob is condensation caused by the temperature difference between the steam produced during cooking and the cold surfaces of the hood.

Droplets can fall onto the hob or into pots, potentially ruining food and damaging cabinets. Over time, the presence of moisture can damage both the wall unit and the hood itself

Elica reduces the problem thanks to Dropless hoods. Three effective systems, designed, developed and tested, featured in numerous anti-condensation models.

Dry System

The Dry System features a design developed to reduce the areas of contact between the hood and cooking vapours, limiting the formation of condensation. Thanks to special inclined grids, droplets are channelled into a dedicated container that is easily accessible. In built-in hoods, the front visor helps protect cabinet doors and wall units.




Available for:

- Just Dry
- Haiku Dry
- Rules
- Boxin Advance Dry

Easy Dry


In addition to a visor that protects cabinet doors and wall units, the Easy Dry solution features special multi-layer grease filters, capable of also retaining moisture during the cooking process. At the end of cooking, cleaning is quick and easy.

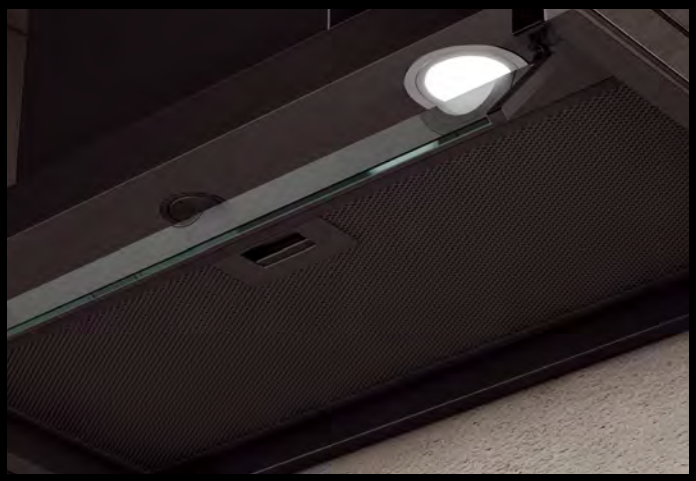

Available for:

- Boxin Easy Dry

Connex™
Remote controls, or automatic operation.

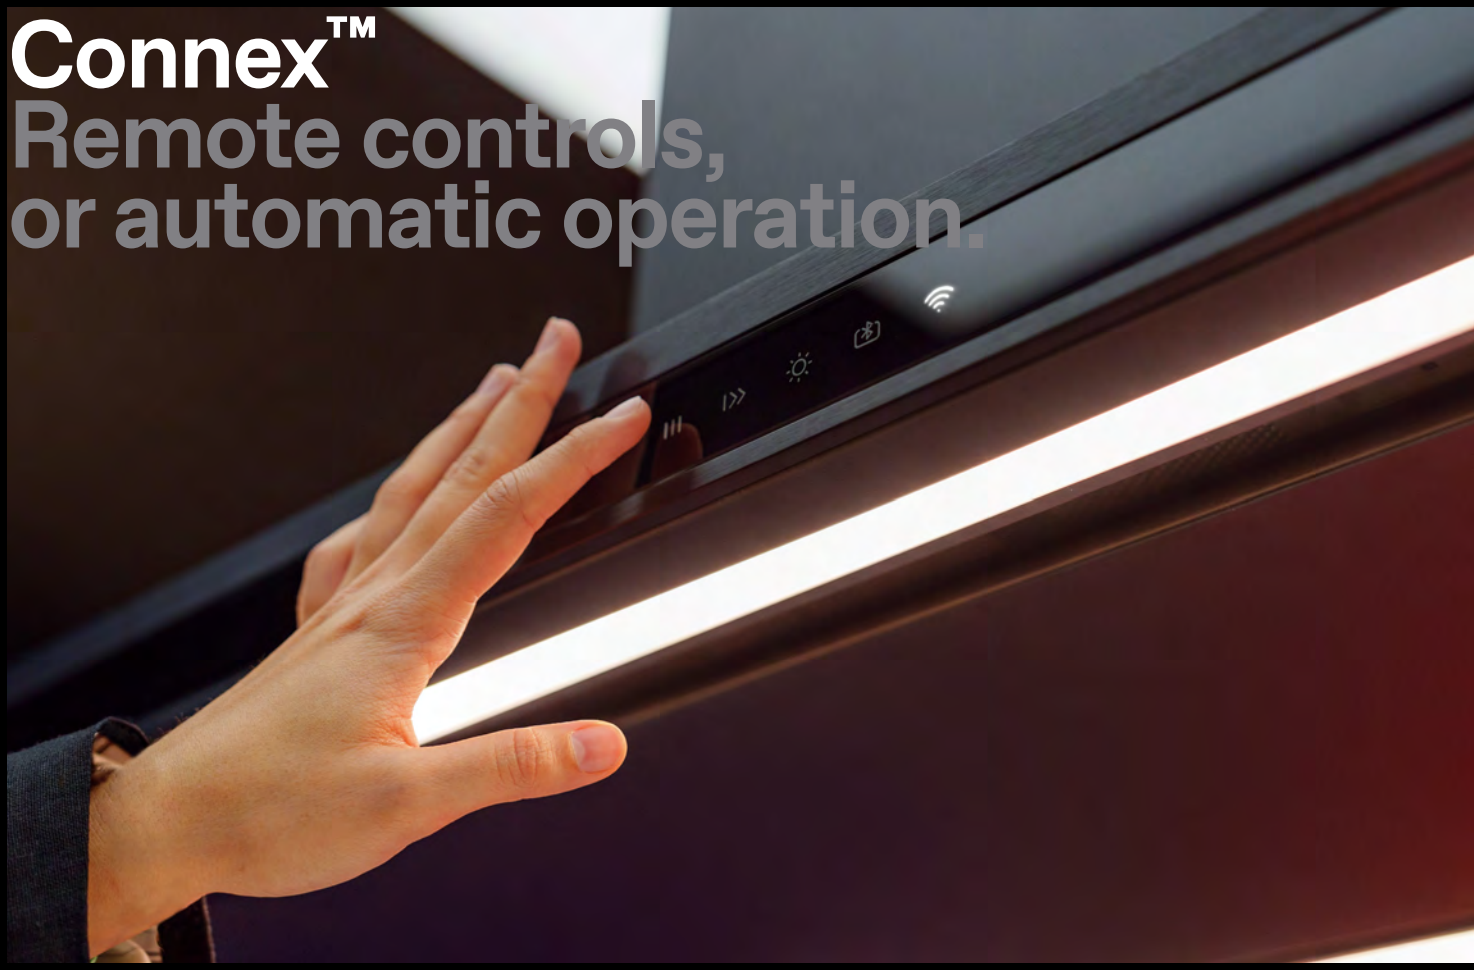

Everything is possible, with our app Elica Connect and latest generation hoods.



Smart Interaction


APP AND VOCAL ASSISTANT

Our hoods can be controlled via the Elica Connect app or through voice assistants (Alexa and Google Home). In addition to switching them on and off, you can select the desired extraction level, light intensity and light tone. The app also makes maintenance extremely simple: you can download instruction manuals, contact Elica Customer Service, monitor filter wear, consult cleaning instructions and access a direct link to the Elica Shop for filter replacement.

Multi Connection

HOOD AND HOB, IN CONSTANT DIALOGUE.

Elica hoods can operate automatically thanks to their connection with Ratio Connex hobs. As soon as cooking begins, the light switches on and extraction is activated, automatically adjusting according to activity on the hob. Once cooking is finished, the hood automatically reduces the extraction rate and, after extracting the residual vapours, switches itself off.

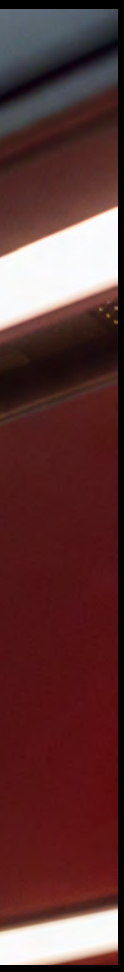

The connection between you and Elica becomes complete. Our technology is intuitive, convenient and easy to activate. Elica offers not only remote control, but also interaction with our induction hobs.

You can control your hood via the Elica Connect app or a voice assistant. You can adjust the light intensity and modulate its tone (warm or cool), matching the lighting to the surrounding environment to create a consistent atmosphere. In addition, the app alerts you when filters need cleaning or replacing, allows you to purchase them through our online shop and puts you directly in touch with our customer service team.

You can also connect our latest-generation hoods with Ratio Connex induction hobs. This allows the lighting to switch on automatically while extraction power adjusts itself according to the settings of the cooking zones.

And you? All you have to do is cook.

Available for:

Lhov

Lhov	Vocal Assistant Wifi Connection

Special Selection Hoods

- TheKub
- Open Suite
- Open Suite Superior

Ceiling hoods

- Lullaby
- Illusion
- Skydome

Island hoods

- Haiku Island
- Haiku Dry Island
- Bio Island
- Element Island
- Adéle Island

Built-in hoods

- Boxin Advance Dry
- Hidden Advance Plus
- Lane Sensor

Wall-mounted hoods

- Om Air
- Rules
- Super Plat
- Plat
- Rift
- Neat
- Stripe
- Haiku
- Haiku Dry
- Just Dry
- Bio
- Majestic
- Element
- Regula
- Adéle

Downdraft hoods

Getup	Smart Interaction

Ratio induction hobs

Connex 905 Plus	Multi Connection
Connex 804 Plus	Multi Connection
Connex 803 Plus	Multi Connection
Connex 604 Plus	Multi Connection
Connex 603 Plus	Multi Connection
Connex 302 Plus	Multi Connection

Product Features.

We have developed technologies to enhance our household appliances, to make life better for everyone, and not only in the kitchen.

Extraction

Combo Pure Filter

Filtered air, beyond cooking.
The combination of the HEPA filter and the charcoal filter is designed to trap particles such as dust, pollen and pet hair in the extracted air.

Brushless

Silence and power together.
Thanks to the Brushless motor, suction power combines with acoustic comfort, so you can talk and cook in peace.

Back Aspiration

Rear extraction, clean aesthetics.
Thanks to this system, the hood can be installed by directing fumes to the rear without visible additional ducts or chimneys. The result? No visible ducts.

Airmatic

Automatic extraction, based on the air.
A sensor detects cooking vapours and fumes and automatically adjusts the extraction flow, then switches off when no longer needed.

Autocapture

Automatic suction.
The hood's suction power is adjusted based on the activity level of the cooking zones on the induction cooktop. The system always knows when to reduce or turn off the suction.



Regenerable filter

Odour filters, regenerable.
Our odour filters can be washed and regenerated according to the instructions in the manual, to reduce the frequency of replacement.

Selective Autocapture

Extracts where and when needed.
The appliance detects active cooking zones and directs the extraction only to the side where it is needed. At the end of cooking, the innovative system gradually reduces power to extract residual steam.

Perimeter Aspiration

The extraction surface is now tucked away.
Distributed over the entire perimeter of the hood, the extraction system offers increased efficiency, while the filtering components remain hidden for a clean aesthetic.

Comfort Silence

The power is there, but is silent.
Our extraction systems are designed to limit noise and offer high acoustic comfort. So you can cook and hold a conversation peacefully, even when the kitchen is open to the living area.

Delay Switch Off

Power off delayed, and no more worries.
With this timer, you can set the automatic switching off of the hood following a prefixed time. You can keep it on even after you have finished cooking. No problem! It'll switch off on its own anyway!

Maintenance Alarm

Filters KO'd? You'll be informed.
A warning light will switch on to signal out to you that grease filters and odour filters have reached their maximum saturation point. It's time for you to wash or replace them.

Cooking

Food Probe

To know when it’s cooked all the way through.
The food probe leaves no room for doubt: it measures the internal temperature of your food, delivering precise cooking and preventing you from leaving the oven on when it’s no longer needed.

Combi Steam

Traditional Cooking or Steam?
Better together. This mode lets you combine traditional heat and steam in a single cooking cycle. For dishes that are crispy on the outside and tender on the inside.

Microwave

For those who love speed.
Super quick cooking, heating or defrosting with the aid of the microwave oven. By now a must.

Steam

The good and proper cooking.
This cooking mode will exalt the taste of all your recipes: vegetables, meat, fish, bread. Crispy outside and juicy inside.

Air frying

Now you can finally cook french fries, fish, chicken wings, croquettes, and fried vegetables with less oil than traditional frying, bringing out their flavor and crispiness.

Selective Grill

Grill only where needed.
A feature that lets you grill different foods at the same time or use just half the oven to cook side-by-side dishes.

Multi Cooking

Multi Step Cooking
Manual cooking programs can be combined in sequence. For example, you can bake bread, and after it has risen, grill it and let it finish cooking. All without any interruptions.

Automatic Programs

Select the dish, and the oven does the rest.
Choose the recipe, and the automatic program will handle the cooking. It adjusts the programs, functions, temperature, and cooking times, helping you achieve consistent results... all with just one finger!

Hydro Cleaning

Fast cleaning in less than 30 minutes.
Hydrolytic cleaning softens dirt with water and heat, for a clean oven in less than 30 minutes with no effort.

Soft Closing

Pleasure to close.
Thanks to the smooth movement of the hinges, closing the oven door is light and soundless. Try it out and see for yourself!

Sliding Guides

Backing trays at hand.
The telescopic guide slides smoothly in the oven cavity; you can now take out or put in the baking trays easily. Even the heavier ones.

Cool Door

Greater safety in the kitchen, even when the kids are about. The multiple oven-glass door limits the temperature of the outer surface during cooking.

Cooking Flow

Heat regulation with a simple gesture.
Switching over from lively boiling cooking to maintaining your food warm is now easy. Simply move the pot from one cooking zone to another. Each zone will activate the pre-set power when it detects the presence of a pot.

Warming Mode

Slow cooking, delicious results.
Conceived for slower cooking preparations, ideal when warming up milk or broths, for the preparation of custards or sauces preventing them to overheat and keeping your prepared food warm.

Simmering Mode

Enough of boiling over!
You can simmer your food for longer. No more excessive boiling or spilling over from your pots. No more tough food or burnt pans or saucepans!

Melting Mode

Everything melts for the better.
Tired of melting the butter and chocolate and having to stir them continually or burning them? The secret? Keeping the temperature always below 50°, this will never happen again.

Bridge Zone

Having problems with oval-shaped or bigger-sized pots? This function transforms two cooking zones into a bigger size one, ensuring you the same power level and constant temperature for a homogeneous cooking

Fast Boiling

When you're in a hurry.
This feature delivers the zone's maximum power to bring liquids to the boil quickly. It is also ideal for frying, keeping food crispy.

Dual Zone

The ideal for every pot.
Two concentric zones on your hob can be activated independently. The central one for the smaller pans and both for the bigger pans.

Pot Self Detection

Put down, adjust, cook.
The technology automatically detects the presence of pots in the cooking zone, activating a dedicated control. All you need to do is to select the power needed.

Timer

All you need to do is set the minutes and the countdown starts. At the end, it will automatically switch the cooking zone off, emitting a sound signal. Just press the 'touch' control and independent timers will activate in more zones at the same time.

Stop&Go

Everything stops, everything starts again.
Need to move away from the kitchen while you are cooking? Just by a gesture, put all the functions activated on standby. All you need to do is just press a key to start them again with previous settings.

Recall

And everything is how it was before.
The hob has accidentally switched off ? Within 6 seconds just activate this function and all the previous settings before the interruption occurred, will work again in the wink of an eye.



Interactivity

Dim Light

Lighting: as much and however you want it.
With this feature, you can adjust the lighting of your hood: bright light or dim light, as you prefer.

Tune White

Warm or cold, the light tone of your taste.
You can now regulate the LED colour tone of your hood from cold white to warm white. The colour of the light blends in perfectly with the other lights in your living space, thus creating a uniform atmosphere.

Child Lock

Children better protected in the kitchen.
No worries! This function prevents the accidental switching on of cooking zones or extraction areas.

Auto door

Super-smart opening.
To operate it, just press lightly on the display or use a simple voice command (very useful if you're holding pans and containers).

Clean Mode

When cleaning, lock all controls.
This feature allows you to lock the controls so you can clean the product without accidentally activating it.

Wine Coolers

Reversible Door

The reversible door offers maximum installation flexibility. You can choose the opening side that is most convenient for you and best suits your kitchen.



Humidity Care

Humidity: neither too much nor too little. The ventilation system monitors the internal humidity and prevents your wine from oxidising, for moulds to form or bad odours to be given off.

Lighting Care

Look through glass and protection from UV rays. A UV filter-proof look- through glass will perfectly store your LED illuminated bottles. Your wine will now maintain all of its organoleptic qualities and characteristics.

Temperature Control

Constant degrees, well-preserved wines. The internal temperature can be set between 5°C and 20°C. The electronic and ventilation system keeps it constant, ensuring excellent storage of your wines.

No Vibration

Good wine wants to stay still. The wooden oak shelves and the stable cooling system reduce micro-vibrations, which could disturb the evolution of the wine. With the sliding guides you can take out the bottles in a safe and easy way.

Lhov

The appliance that was always missing? Not any longer. Oven, hob and extractor hood: together at last, revolutionising your cooking experience. Lhov is the first All-in-One solution on the market, now available in glossy black, matte black and matte white finishes.

elica
5 Years Premium Warranty

Electronic and mechanical components.
Registration within 90 days of purchase at elica.com (see p. 376).

2

All you need is Lhov.

Its innovations speak for themselves. The ultra-linear design is a unique synthesis of aesthetic research and performance: perfectly flush with kitchen cabinetry, it integrates different cooking areas and cooking modes. Thanks to the voice assistant function, Lhov can also be managed remotely. Alternatively, a simple touch is enough to activate the display controls and select functions inspired by professional cooking.



The first All-in-One cooking solution.



Space Reshaper

Lhov's design breaks the rules of the category by combining hob, oven and extractor hood in a single appliance for the first time. Lhov fits seamlessly into standard sized cabinet (90cm), optimising space and highlighting the linearity of the kitchen design.

Odour Stopper

The revolutionary aspirating heart captures fumes and odours from the hob and, at last, from the oven too, both during cooking and when the door is opened. Thanks to the heat that stays inside the cavity, cooking with the Lhov oven remains pleasant even in summer.

Oven Hero

You have never seen an oven like this before, inside and out.
The cavity, 30% wider than that of a standard 60 cm oven, allows you to bake two pans side by side, oversize dishes or a large quantity of savoury snacks or desserts. And that's not all: you can combine traditional cooking with steam cooking, and activate the grill in half of the cavity only. Plus, you can leave the cooking up to the oven thanks to its automatic programmes (just select the dish) along with the food probe.

Over the Hob

Lhov hob redefines the standards of induction cooking. The first Elica induction aspiration hob with five cooking zones, powerful and combinable for large pans and equipped with automatic cooking features for melting, warming and simmering.

Smart Control

Activate it and the excitement begins: an ergonomic, intuitive digital display that lets you control the entire product, as naturally as your smartphone. Thanks to its connectivity, it stays constantly updated and interacts with your environment, responding to voice commands and offering simple, immediate control to manage Lhov.



Lhov.
All the advantages, in detail.

Lhov's oven boasts multiple features and cooking modes, to enhance everyday meals as well as your culinary dishes on special occasions. It is possible to cook tasty dishes with ease of use, versatility and time savings.



Cooking Combi Steam.


Steam cooking is ideal for gentle cooking while preserving the flavour, texture and colour of food. Lhov's steam programmes use lower temperatures than traditional cooking and are divided into:

- Full Steam, particularly suitable for vegetables and fish;
- High, medium and low humidity programmes, for baking meat, bread, eggs and cakes with excellent results



Air Fry.

With this function you can cook food such as chips, fish, chicken wings and croquettes with less oil than traditional frying, preserving flavour and crispiness. Air flowing through the perforated baking tray allows even cooking and excellent browning, with faster times than traditional fan cooking.

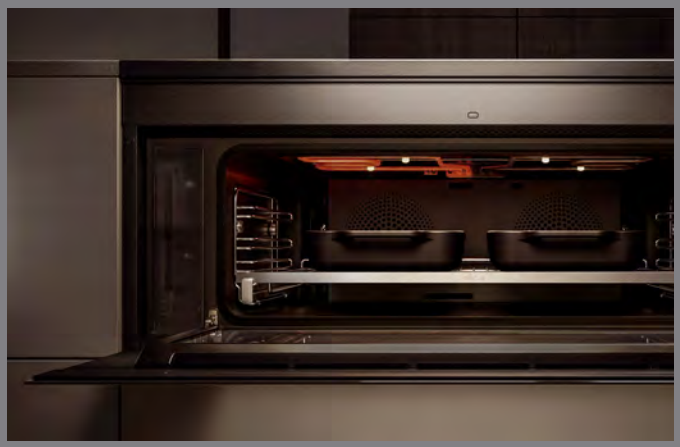

Selective Grill.

You can finally heat up only half of the grill for grilling small portions.



Food Probe Thermometer.

The food probe allows precise and accurate cooking. Simply set the desired internal temperature: once reached, the oven will switch off automatically.



Multi Cooking.

Manual programmes can also be combined in a sequential way (up to a maximum of 3 steps). An example? You can bake bread after it has leavened or grill the lasagne at the end.

Automatic programs.

They allow you to cook by simply selecting the dish and the desired degree of cooking: the oven will do everything on its own. The automatic programmes are suitable for cooking both single dishes and numerous portions; the oven large cavity allows you to cook your various dishes side by side at the same time, thus optimising time.
For optimal results, simply scan the QR code of the Elica recipe on the display to receive step-by-step guided instructions.

Cleaner air. Fumes and odours? Captured straight away.

Lhov introduces a never-before-seen solution: two air inlet slots on the short sides of the hob, to ensure high-performance bottom extraction in both duct-out and filtering mode.
The two openings are concealed by subtle glass flaps that open only when and where needed (targeting the cooking zones in use).

The extraction system also extracts fumes and odours from the oven, thanks to:

- the fluid dynamic circuit that automatically cools the door and perimeter elements of the oven, preventing odours from seeping out the front;
- when the door is opened, this extraction system captures steam before it can escape.

Induction hob. Automatic features.

These are a must for both everyday meals and special occasions. Simply tap to select one of the following options:

- **Melting,** to melt butter and chocolate effortlessly, without constantly stirring and no risk of burning;
- **Warming,** to keep prepared dishes warm, or to heat up milk, broth, custards and sauces, to prevent burning on the bottom;
- **Simmering,** to simmer dishes and prevent your pots from boiling over.
- **Cooking Flow,** to adjust heat levels by simply moving the pot from one cooking zone to another, taking advantage of the preset power levels.





Voice Assistant

Lhov can be controlled remotely in a simple and intuitive way. It communicates with voice assistants, allowing you to switch the hood on or off, select the most suitable extraction level, manage the oven, open the door and set cooking programmes.
A technology designed to make every gesture simpler and more immediate, even when your hands are busy, ensuring constant control. Even remotely.

Energy. Smart management.

Smart management. Lhov automatically manages the power drawn by the three appliances to ensure correct operation and reduce the risk of interruptions caused by exceeding the available power. This requires setting two parameters: the first is the maximum kW limit set by your installation or contract; the second to decide how much power to allocate to the product. Lhov automatically decides the order of priority of the oven, hob and hood to keep them running. The system warns you if the set limit is exceeded, so you can decide whether or not to continue cooking until the food is done.

Lhov

Design Fabrizio Crisà

PREMIO COMPASSO D'ORO ADI


24 PRODUCT DESIGN AWARDS WINNER

Pag. 16





DIMENSIONAL DRAWING

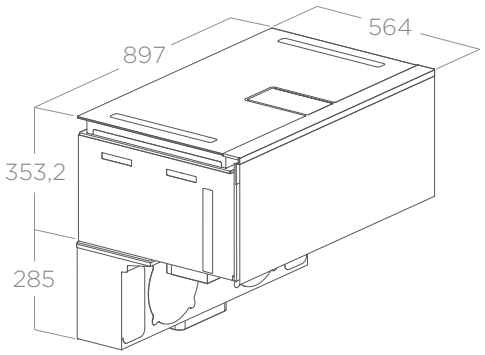

TECHNICAL SPECIFICATIONS

Size	90×56,5×36 cm
Cut out	85,5×49 cm (cut)
Version	Duct-out convertible to filtering
Finishing	Black glass + black anodised aluminium, Matt Black glass + black anodised aluminium, Matt White glass + matte platinum anodized aluminium

FEATURES

- Combi Steam
- Automatic Programs
- Air frying
- Food Probe
- Multi Cooking
- Selective Grill
- Auto door
- Selective Autocapture
- Comfort Silence
- Fast Boiling
- Bridge Zone
- Cooking Flow

OVEN

Type	CombiSteam
Temperature Range	30° - 280° C
Cavity volume	62 l
Food Probe Thermometer	√
Door	Electronic opening, cool door
Lighting	4 LED 2,6 W
Racks	3 wire guides + 1 telescopic level
Cleaning	Hydrolytic with steam
Cooking Programs	11 classic, 9 vapour, 6 special, 61 auto
Energy class	A+

INDUCTION HOB

Cooking zones	1	220×184mm - 2,1/3,7 kW
	2	220×184mm - 2,1/3,7 kW
	3	220×184mm - 1,85 kW
	4	220×184mm - 2,1/3,7 kW
	5	220×184mm - 2,1/3,7 kW
Bridge zone	2	

ACCESSORIES INCLUDED

- baking tray in glass
- kitwire rack
- kit steam set
- kit air fry
- kit frame support
- kit pizza trays support
- food probe
- steam water tank
- grease filter

ASPIRATION

Booster airflow	1100 m^3/h
Noise level max	62 dB(A)
Cavity vapours extraction	√
Energy class	A

ACCESSORIES

Metal baking tray set	KIT0200871
HP Regenerable Ceramic Anti-Odour Filter	KIT0200892
Filter installation kit	KIT0203143

ENERGY MANAGEMENT

Total absorption	13 kW (6kW everyday use)
Power limitation	√

MODELS

LHOV COMBISTEAM BL/A/90	PRF0195920
LHOV COMBISTEAM WH/A/90	PRF0213186
LHOV COMBISTEAM RAW BR/A/90	PRF0213187

FRONT PROFILE KIT
Mandatory to complete the installation. Details page 50

Lhov.
Profile accessories for installation.

Aligned and overlapped installation Profile:

The front profile ensures a perfect match with the thickness of your worktop, both in ‘on top’ and flush installation.
The profile dimensions is referred to countertop thickness in the standard sizes.





Kit frontal profile flush top

	BLACK	MATT PLATINUM
10 mm	–	–
12 mm	–	–
16 mm	KIT0200882	KIT0213198
18 mm	KIT0200885	KIT0213199
20 mm	KIT0200886	KIT0213200
25 mm	KIT0208450	KIT0213201
30 mm	KIT0200887	KIT0213202
38 mm	KIT0200888	KIT0213203
40 mm	KIT0200889	KIT0213204
50 mm	KIT0200890	KIT0213205

Kit frontal profile on top

	BLACK	MATT PLATINUM
10 mm	KIT0200873	KIT0213188
12 mm	KIT0200874	KIT0213189
16 mm	KIT0200875	KIT0213190
18 mm	KIT0200876	KIT0213194
20 mm	KIT0200877	KIT0213191
25 mm	KIT0208449	KIT0213192
30 mm	KIT0200878	KIT0213193
38 mm	KIT0200879	KIT0213195
40 mm	KIT0200880	KIT0213196
50 mm	KIT0200881	KIT0213197

(*) Black profiles are matched with the black and matt black models, while Matt Platinum profiles are intended for the Matt White model.

Separate installation profile

This profile should be used for all countertop thicknesses range from 10 to 50 mm, living it free. Suggested for not standard sizes and shapes.





Separate installation profile (free top)

	BLACK	MATT PLATINUM
only	KIT0200891	KIT0213335

Lhov.
Oven accessories.

Oven accessories included.

KIT0200849
Wire Rack



KIT0200858
Glass baking tray




KIT0200860
Steam set kit



KIT0200869
Kit air fry



KIT0200872
Kit frame support



KIT0200870
Kit pizza trays support



Oven accessories not included.

KIT0200871
Kit metal baking tray



KIT0200892
HP regenerable odour ceramic filter



KIT0213395
Descalcifier



Buy on Elica Shop





← Lhov Matt Black

Lhov Matt White ↓



Lhov.
Flexible installation

One product, three modules.

With LHOV you can design the kitchen space in an innovative way. The installation is very simple thanks to the 3 modules: extraction, oven and hob.

Watch installation video



Seamlessly integrated into standard kitchen bases.

Lhov can be installed in any type of kitchens (wall-mounted, island or peninsula) with 90 cm cabinets. The front profile acts as a connecting element and ensures a perfect match with the thickness of your worktop, both in 'on top' and flush installation*.
The adjustment systems allow the oven to be always flush fit with the cabinet doors and the hob to be aligned with the top projection.

Lhov is to be installed at the top of the kitchen base, therefore it is compatible with various heights of standard kitchen cabinets.

- Cabinet standard: 90cm
- Cabinet depth: da 60cm
- Housing: 90x36cm
- On Top: Top 10mm-50mm
- Flush: Top 16mm-50mm
- Max. drawer depth: 40cm
- Min. plinth height: 6cm




*See the accessories section for available sizes.


Technical drawings and details.

The hole for installing the product is made by following the standard procedure, the same used for installing a standard hob or extractor hob.
Only in the case of total alignment with the top, is additional front milling required.

M1. Overlapped installation


The profile overlaps and protrudes in the front area.

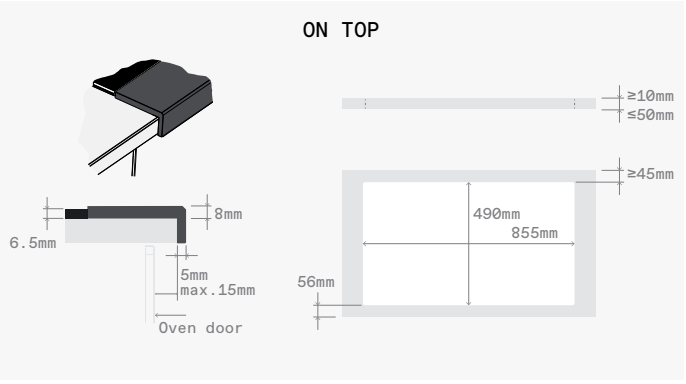


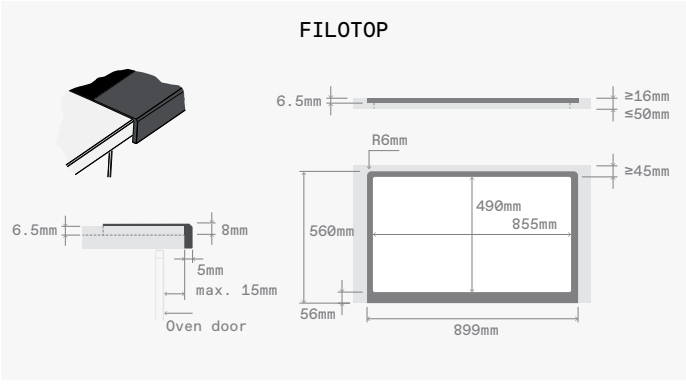

M2. Aligned installation


The profile is completely aligned with the top.

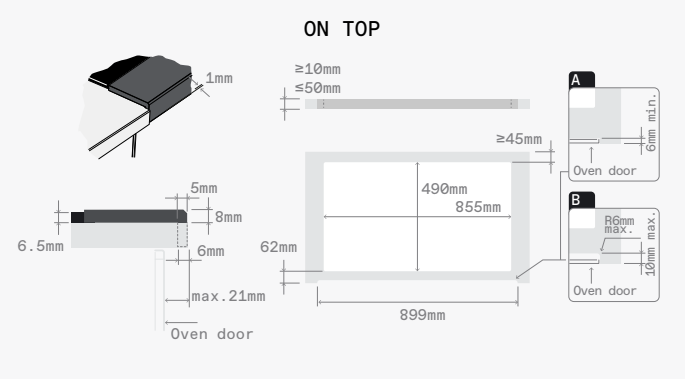


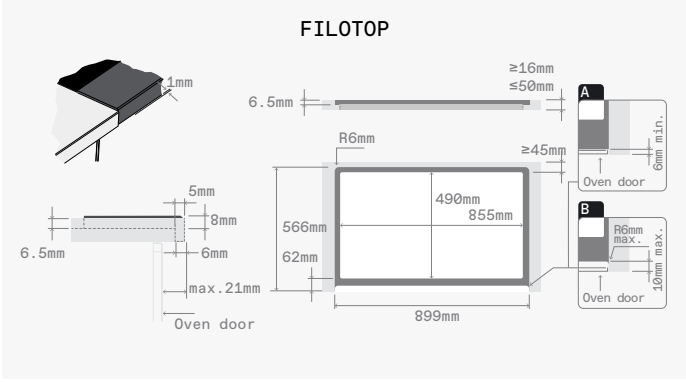

M3. Separate installation

The top is free and visible on the front side.

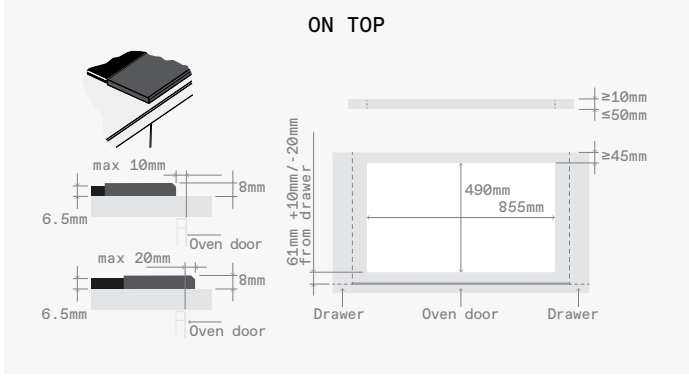

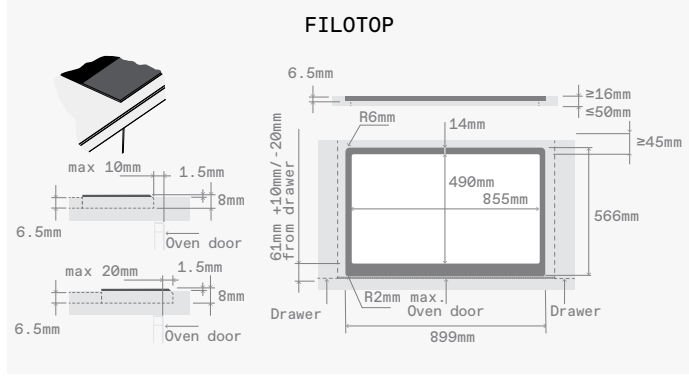

See the accessories section for the available profiles.

Lhov Duct-out Installation.

Lhov can be installed in duct-out version thanks to the piping by Elica (to be purchased separately). Piping allows to have a rear outlet or to channel the fumes under the plinth or the floor, towards an exit point located outside the home.



Example of installation (duct-out version)




Rear outlet




Side outlet

Accessory pipe fittings for duct-out version.

KIT0120991
222×89×1000 mm




KIT0173527
222×89×500 mm



KIT0120996
Ø150×500 mm



KIT0121000
Ø150×1000mm



KIT0121001
227×94×80mm




KIT0121002
15° 227×138×94mm



KIT0121003
Ø158X59mm



KIT0121004
90° 227×288×94mm



KIT0121005
90° - 227×94mm




KIT0121006
90° - Ø157mm




KIT0121007
227×94 - Ø146mm




KIT0121008
227×94 - Ø153mm




KIT0121009 (stainless steel)
int 216×82
ext 290×160 mm



KIT0121010 (stainless steel)
190×190 - Ø147mm




KIT0206255 (plastic)
190×190 - Ø147mm



KIT0126810
227×94×190/560 mm



KIT0161453
50 mm x 25 m



Buy on Elica Shop


Filtering installation kit UNDER PLINTH (min h6cm)

With this kit, you can install the appliance in filtering mode. Filtered air is channelled into the plinth and exits diffusely through the vent opening, which can be finished with a chrome-plated profile.

KIT0203143

- Ceramic filters (2 pieces)
- 250×94×227 mm rectangular pipe
- Adapter
- Chrome-plated trim profile
- Adhesive Tape




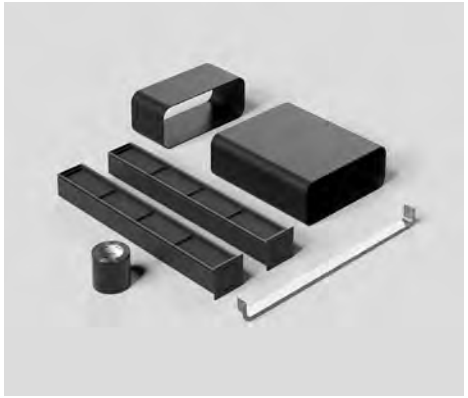

Leave at least 5 cm gap between the outlet and the floor to ensure proper operation

KIT0200892
HP regenerable odour ceramic filter

The ceramic filter is a modular charcoal filter that can be thermally regenerated in the oven every 2/3 months, up to max 5 years. Maintenance frequency depends on usage: you will receive a notification when it is time to regenerate the filters in the oven using the dedicated programme.

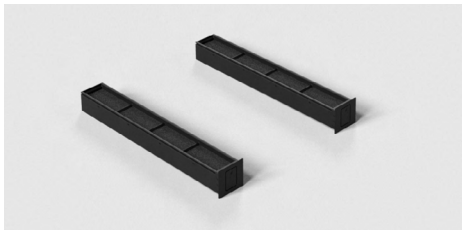

Luna

Luna, the suspended lamp that enhances the space and accompanies every gesture in the kitchen. The ideal complement to the aesthetics and performance of the cooking collection. A true total lighting experience: essential in design, natural in interaction, transforming the kitchen into a space to live in every day.

3

Defined by an essential yet striking design, available in glossy or matte black, this lamp features an upper light to create atmosphere and a lower light to precisely illuminate every gesture and ingredient.

The Dim Light and Tune White functions allow the intensity and tone of the light to be adjusted according to the desired atmosphere. In addition, maximum practicality with zero contact thanks to the gesture control function.



Luna

Design Fabrizio Crisà

6 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

TOTAL LIGHTING EXPERIENCE

Two lights for your space: the upper one warms the atmosphere, the lower one illuminates the worktop. For maximum visual comfort.

■

GESTURE CONTROL

Light control with simple gestures and no contact. You can manage the lighting even while cooking, without touching the lamp.

■

BALANCED HEIGHT REGULATION


Adjust the height of the lamp as desired. The system guarantees precision, maximum ease of use and always perfect lighting.







TECHNICAL DRAWING

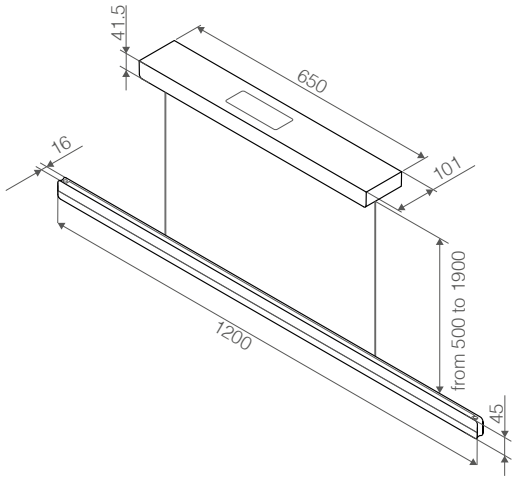

FEATURES

Dim Light

Tune White

TECHNICAL SPECIFICATIONS

Lamp dimensions	120×4,5×1,6 cm
Ceiling base dimensions	65×10,1×4,1 cm
Cable length	min 50 - max 190 cm
Finishing	Black + anodized aluminium, Matt black + anodized aluminium

LIGHTING

	DIRECT LIGHT	INDIRECT LIGHT
Type	Strip Led 1×24W	Strip Led 1×10W
Luminous flux	2100-2300 LM	1100-1200 LM
Intensity	2700 K - 5000 K	
CRI	≥80	
Lifetime	≥30000 h	

PERFORMANCE

Controls	Gesture control + wall switch
Total absorption	40 W
Voltage	220-240V
Frequency	50 Hz
Energy class	G

MODELS

LUNA BL 120	PRF0211727
LUNA BL MATT 120	PRF0214843

↓ Balanced Height Regulation





↑ Gesture Control



NikolaTesla

Aspiration Hobs

Induction or gas hob? Whatever the choice, a hob with an Elica integrated hood brings high performance into your kitchen: advanced cooking features and air filtered from odours, fumes and vapours. Available in two versions: classic, with glossy glass, and Raw, with matte black glass.

4

Ingenuity in the kitchen.

Extraction takes place from below, integrated into the hob, capturing cooking vapours and odours. The extraction speed captures fumes where they are generated and before they rise upwards. An effective and quiet system, with automatic or manual control.

Cleaner air, with fewer vapours and odours.

Elica extractor hobs offer effective grease and odour filtration, with class A or B grease filtration efficiency. The combined action of the filtering systems removes residual humidity from the environment, protecting kitchen furniture over time.

A solution for every need.

The NikolaTesla range stands out for its aesthetic versatility, dimensions, functions and installation possibilities. Induction hobs with intelligent automatic features, an always intuitive control interface — with knobs or touch controls — and configurations designed to adapt to every space and need.


Compact and flexible.

All hobs feature a depth of less than 21 cm, leaving useful space inside the cabinet. The rear ducting, which can be positioned close to the back panel or with direct outlet, allows for deeper drawers. Installation flexibility: top-mounted or flush-mounted, in extraction or filtering version — with ducted mode (Plinth In, Plinth Out) or direct outlet (Back Outlet).



NikolaTesla

Aspiration Hobs

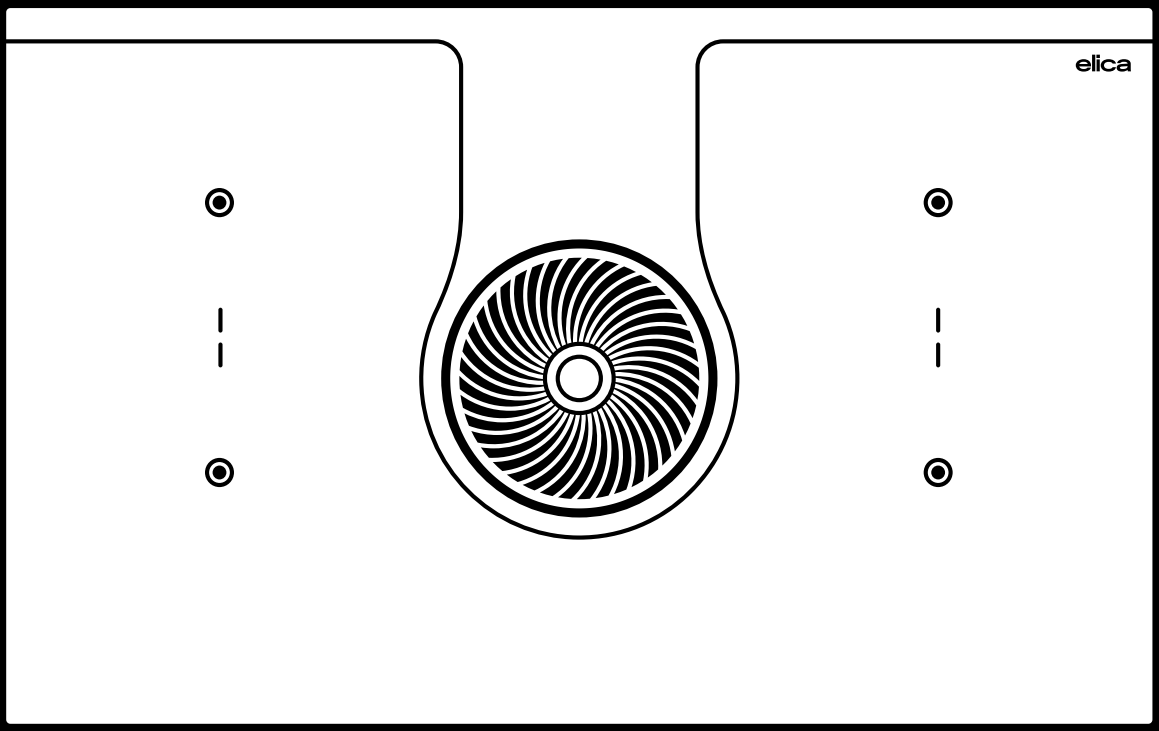

elica
5 Years Premium Warranty

Electronic and mechanical components.
Registration within 90 days of purchase at elica.com (see p. 376).

4.1 Evo Collection

The models equipped with EVO filters represent the evolution of NikolaTesla technology. The powerful extraction captures not only fumes, vapours and unwanted odours, but also grease and moisture, while the cooking functions offer performance designed for you.

Extractor hobs of tomorrow, today.

The NikolaTesla EVO product line is avant-garde. These 80 cm extractor hobs boast a distinctive circular extraction area, complemented by bold design elements and minimalist serigraph details, creating an elegant, sophisticated, and iconic look.
They are available in a wide variety of models, with direct and intuitive controls, either touch or knob. They offer innovative features such as an integrated scale or a gas hob.


And performance? Designed for you.


Performance designed around your needs, in both cooking and extraction: booster for rapid boiling, automatic features and ergonomic bridge zones. The automatic extraction system helps improve air quality in the kitchen, quickly capturing fumes and odours.

Filtration: a new system.

The modern EVO filter, two-in-one for grease and odours, combines grease, odour and humidity removal in a single element, accessible with a simple gesture and easy to clean and regenerate. The odour filter can be regenerated, reducing the frequency of replacement. In addition, the extractor hobs in the collection are class A or B for grease filtration efficiency.

NikolaTesla Evo Collection. All the advantages, in detail.

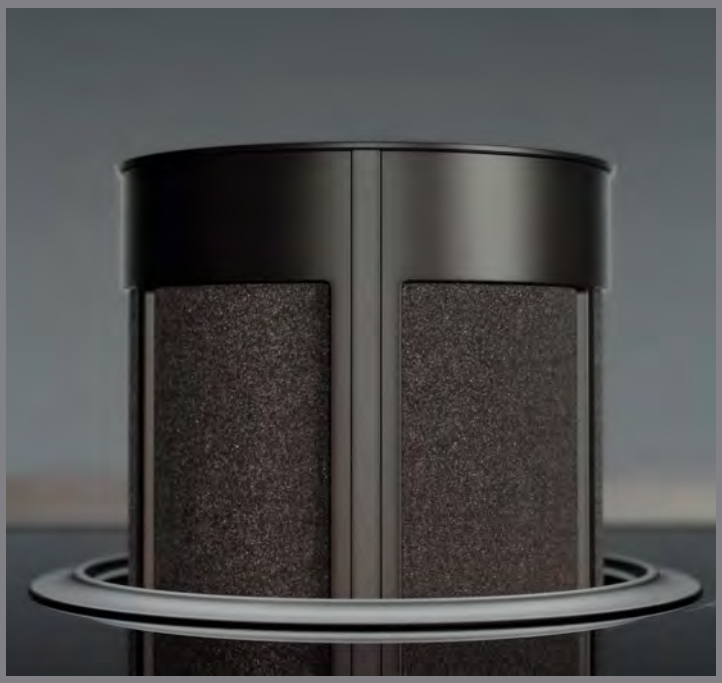

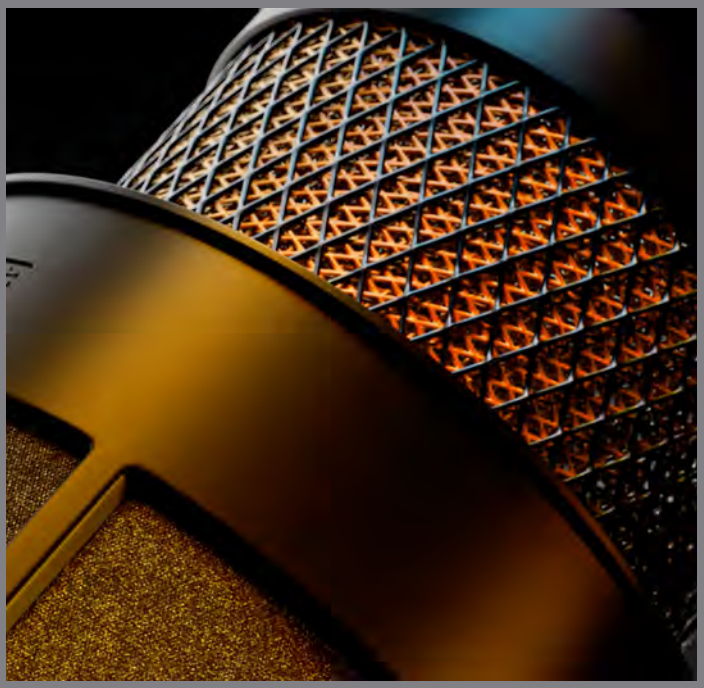

The EVO filter.

The new EVO filter is a 3-in-1 filter designed to remove grease, odour, and moisture, accessible with a simple tap from the central area, thus avoiding other unsightly interruptions in the product. The system consists of two elements:

- a grease filter featuring 6 aluminium layers, that can be washed by hand or in the dishwasher;
- an odour filter, made of a special reticulated polyurethane foam coated with spherical activatedMcharcoal, washable and regenerable, to reduce the frequency of replacement.

The regeneration process involves washing the filter (by hand or in the dishwasher) and then drying it in the oven at 75°C.

Power and silence, in harmony.

The extraction system and the latest generation brushless motor provide highly powerful and silent operation, both in the duct-out and filtering mode.

Functions designed for every model.

Among NikolaTesla Evo models you can find yout uniqueness. You can cook ergonomically thanks to the analog touch and feel knobs. The cleverly concealed extraction system springs to life with a simple tap on the flap. You can weigh food directly on your extractor hob and experience the magic of gas and bottom extraction.



Extraordinary functions.

- Crispy frying: the hob power quickly reaches the ideal frying temperature and restores it when food is added. The result? Crispy, golden frying.
- Fast Boiling: thanks to the booster function, the power delivered by the zone allows water to reach boiling point quickly; it is also ideal for frying, giving crispy and tasty dishes.
- Automatic functions activated with a simple touch, such as Warming, to keep dishes warm or reheat them, or for slow cooking at controlled temperatures. NikolaTesla One HP and NikolaTesla Unplugged also feature Melting, for melting butter and chocolate without burning them, and Simmering, for gentle simmering without water spilling over.
- Bridge Zone: two adjacent cooking zones combine to accommodate large cookware.

NikolaTesla One HP

Design Fabrizio Crisà

12 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

FAST BOILING

Activate maximum power for fast boiling. Also ideal for repeated frying, keeping food crispy and tasty.

■

RAW FINISHING

The elegant matt black finish offers high resistance to scratches, reduced visibility of fingerprints and easy cleaning.

■

DIRECT INTERACTION


A specific control for each cooking zone. With a gesture, adjust power, timer and functions.



NikolaTesla One HP RAW



DIMENSIONAL DRAWING

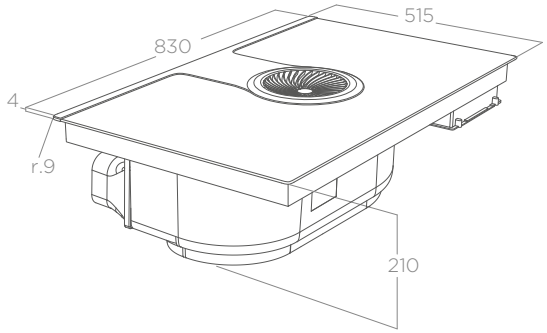

TECHNICAL SPECIFICATIONS

Size	83×51,5×21 cm
Cut out	80,7×49,2 cm
Version	Duct-out convertible to filtering
Finishing	Black glass, Matt black glass

▪ Aluminium grease filter included

FEATURES

- Bridge Zone
- Autocapture
- Melting Mode
- Warming Mode
- Simmering Mode
- Pot Self Detection
- Delay Switch Off
- Child Lock
- Stop&Go
- Recall
- Timer
- Maintenance Alarm

ASPIRATION

	Duct-out	Filtering
Controls	Touch Control Slider 9S+B	
Booster airflow	620 m^3/h	570 m^3/h
Noise level min-max	35-67 dB(A)	38-71 dB(A)
Absorption	175 W	175 W
Energy class	A++	A++
Grease filtration class	A	A

ACCESSORIES

Filtering kit PLINTH IN	KIT0199835
Filtering kit PLINTH OUT	KIT0199836
Filtering kit BACK OUTLET	KIT0199838
Kit EVO Central Outlet	KIT0199839
Kit EVO filter	KIT0200786

COOKING

Controls	Direct Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	4,5 kW
Voltage	220-240V / 380-415V 2N / 380-415V 3N
Cooking zones	1 220×184 mm - 2,1/3,7 kW 2 220×184 mm - 2,1/3,7 kW 3 220×184 mm - 2,1/3,7 kW 4 220×184 mm - 2,1/3,7 kW
Bridge zone	2

MODELS

NIKOLATESLA ONE HP EVO BL/A/83	PRF0196322
NIKOLATESLA ONE HP RAW BR/A/83	PRF0200577

NikolaTesla Unplugged

Design Fabrizio Crisà

17 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

RAW FINISHING

The elegant matt black finish offers high resistance to scratches, reduced visibility of fingerprints and easy cleaning.

■

NATURAL INTERACTION

Knob with an analog touch & feel for exceptional grip. Easy cleaning with separate control and cooking areas, in a plug & play system.

■

FLUSH DESIGN


When suction is off, the hob appears perfectly linear, elegant and easy to clean.



NikolaTesla Unplugged Stainless Steel



DIMENSIONAL DRAWING

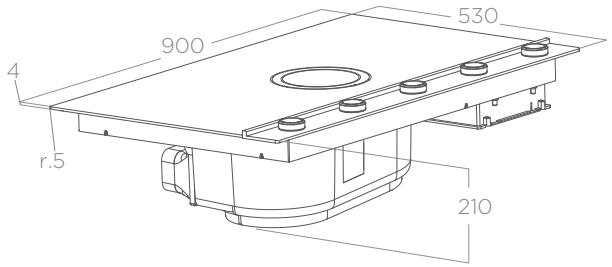

TECHNICAL SPECIFICATIONS

Size	90×53×21 cm
Cut out	80,7×49,2 cm
Version	Duct-out convertible to filtering
Finishing	Black glass + black anodized aluminium, Black glass + stainless steel, Matt Black glass + black anodized aluminium

▪ Aluminium grease filter included

FEATURES

- Bridge Zone
- Autocapture
- Warming Mode
- Melting Mode
- Simmering Mode
- Delay Switch Off
- Child Lock

ASPIRATION

	Duct-out	Filtering
Controls	Electronic Rotative 9S+B	
Booster airflow	620 m^3/h	600 m^3/h
Noise level min-max	34-67 dB(A)	38-71 dB(A)
Absorption	175 W	175 W
Energy class	A++	A++
Grease filtration class	A	A

ACCESSORIES

Filtering kit PLINTH IN	KIT0199835
Filtering kit PLINTH OUT	KIT0199836
Filtering kit BACK OUTLET	KIT0199838
Kit EVO Central Outlet	KIT0199839
Kit EVO filter	KIT0200786

COOKING

Controls	Electronic Rotative 9P+B
Absorption	7,2 kW
Power limitation	3,1-4,5 kW
Voltage	220-240V / 380-415V 2N / 380-415V 3N
Cooking zones	1 210×191mm - 2,1/3,0 kW 2 210×191mm - 2,1/3,0 kW 3 210×191mm - 2,1/3,0 kW 4 210×191mm - 2,1/3,0 kW
Bridge zone	2

MODELS

NIKOLATESLA UNPLUGGED EVO BL/A/90	PRF0213327
NIKOLATESLA UNPLUGGED EVO IX/A/90	PRF0213328
NIKOLATESLA UNPLUGGED RAW BR/A/90	PRF0213331



NikolaTesla Unplugged Black ↑
NikolaTesla Unplugged RAW →



NikolaTesla Switch Glow

Design Fabrizio Crisà

12 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

FLUSH DESIGN

When suction is off, the hob appears perfectly linear, elegant and easy to clean.

■

DIRECT INTERACTION

A specific control for each cooking zone. With a gesture, adjust power, timer and functions.

■


RAW FINISHING

The elegant matt black finish offers high resistance to scratches, reduced visibility of fingerprints and easy cleaning.





DIMENSIONAL DRAWING

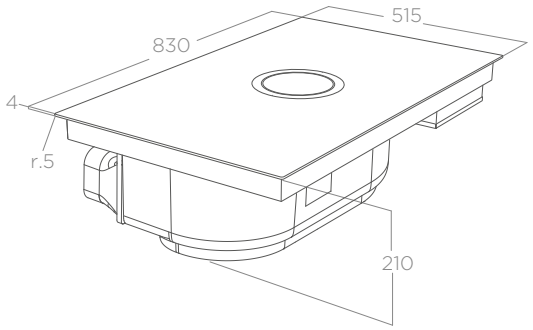

TECHNICAL SPECIFICATIONS

Size	83×51,5×21 cm
Cut out	80,7×49,2 cm
Version	Duct-out convertible to filtering
Finishing	Black glass + black aluminium, Matt black glass + black aluminium

▪ Aluminium grease filter included

FEATURES

- Bridge Zone
- Stop&Go
- Airmatic
- Recall
- Warming Mode
- Timer
- Delay Switch Off
- Maintenance Alarm
- Child Lock

ASPIRATION

	Duct-out	Filtering
Controls	Touch Control Slider 9S+B	
Booster airflow	620 m^3/h	600 m^3/h
Noise level min-max	34-67 dB(A)	38-71 dB(A)
Absorption	175 W	175 W
Energy class	A++	A++
Grease filtration class	A	A

ACCESSORIES

Filtering kit PLINTH IN	KIT0199835
Filtering kit PLINTH OUT	KIT0199836
Filtering kit BACK OUTLET	KIT0199838
Kit EVO Central Outlet	KIT0199839
Kit EVO filter	KIT0200786

COOKING

Controls	Direct Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	3,1-4,5 kW
Voltage	220-240V / 380-415V 2N / 380-415V 3N
Cooking zones	1 210×191 mm - 2,1/3 kW 2 210×191 mm - 2,1/3 kW 3 210×191 mm - 2,1/3 kW 4 210×191 mm - 2,1/3 kW
Bridge zone	2

MODELS

NIKOLATESLA SWITCH GLOW EVO BL/A/83	PRF0196335
NIKOLATESLA SWITCH GLOW RAW BR/A/83	PRF0200583





NikolaTesla Switch Glow ↑
NikolaTesla Switch Glow RAW →

NikolaTesla Switch

Design Fabrizio Crisà

11 PRODUCT DESIGN AWARDS WINNER

Pag. 16

FLUSH DESIGN

When suction is off, the hob appears perfectly linear, elegant and easy to clean.

DIRECT INTERACTION


A specific control for each cooking zone. With a gesture, adjust power, timer and functions.



NikolaTesla Switch Black



DIMENSIONAL DRAWING

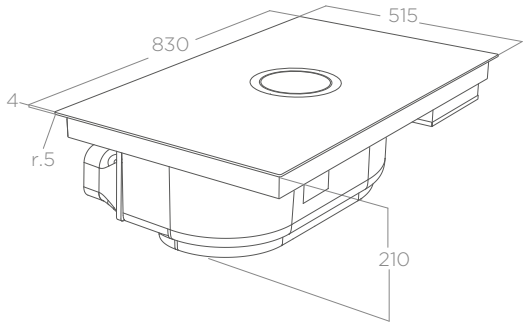

TECHNICAL SPECIFICATIONS

Size	83×51,5×21 cm
Cut out	80,7×49,2 cm
Version	Duct-out convertible to filtering
Finishing	Black glass + aluminium cast iron effect, White glass “ice grey” + stainless steel

▪ Aluminium grease filter included

FEATURES

- Bridge Zone
- Stop&Go
- Airmatic
- Recall
- Warming Mode
- Timer
- Delay Switch Off
- Maintenance Alarm
- Child Lock

ASPIRATION

	Duct-out	Filtering
Controls	Touch Control Slider 9S+B	
Booster airflow	620 m³/h	600 m³/h
Noise level min-max	34-67 dB(A)	38-71 dB(A)
Absorption	175 W	175 W
Energy class	A++	A++
Grease filtration class	A	A

ACCESSORIES

Filtering kit PLINTH IN	KIT0199835
Filtering kit PLINTH OUT	KIT0199836
Filtering kit BACK OUTLET	KIT0199838
Kit EVO Central Outlet	KIT0199839
Kit EVO filter	KIT0200786

COOKING

Controls	Direct Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	3,1-4,5 kW
Voltage	220-240V / 380-415V 2N / 380-415V 3N
Cooking zones	1 210×191 mm - 2,1/3 kW 2 210×191 mm - 2,1/3 kW 3 210×191 mm - 2,1/3 kW 4 210×191 mm - 2,1/3 kW
Bridge zone	2

MODELS

NIKOLATESLA SWITCH EVO BL/A/83	PRF0196328
NIKOLATESLA SWITCH EVO WH/A/83	PRF0196330

NikolaTesla One

Design Fabrizio Crisà

12 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

RAW FINISHING


The elegant matt black finish offers high resistance to scratches, reduced visibility of fingerprints and easy cleaning.



NikolaTesla One RAW



DIMENSIONAL DRAWING

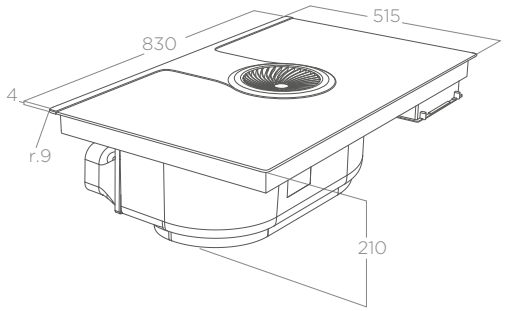

TECHNICAL SPECIFICATIONS

Size	83×51,5×21 cm
Cut out	80,7×49,2 cm
Version	Duct-out convertible to filtering
Finishing	Black glass, Matt black glass

- Aluminium grease filter included

FEATURES

- Bridge Zone
- Child Lock
- Autocapture
- Stop&Go
- Warming Mode
- Timer
- Delay Switch Off
- Maintenance Alarm

ASPIRATION

	Duct-out	Filtering
Controls	Touch Control Slider 9S+B	
Booster airflow	620 m^3/h	570 m^3/h
Noise level min-max	35-67 dB(A)	38-71 dB(A)
Absorption	175 W	175 W
Energy class	A++	A++
Grease filtration class	A	A

ACCESSORIES

Filtering kit PLINTH IN	KIT0199835
Filtering kit PLINTH OUT	KIT0199836
Filtering kit BACK OUTLET	KIT0199838
Kit EVO Central Outlet	KIT0199839
Kit EVO filter	KIT0200786

COOKING

Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	3,1-4,5 kW
Voltage	220-240V / 380-415V 2N / 380-415V 3N
Cooking zones	1 210×191 mm - 1,65/1,85 kW 2 210×191 mm - 2,1/3 kW 3 Ø200 mm - 2,3/3 kW 4 Ø160 mm - 1,2/1,4 kW
Bridge zone	1 left

MODELS

NIKOLATESLA ONE EVO BL/A/83	PRF0196318
NIKOLATESLA ONE RAW BR/A/83	PRF0203698

NikolaTesla Libra

Design Fabrizio Crisà

12 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

INTEGRATED SCALE


In 2018, the first extractor hob with an integrated scale in Europe. You can weigh directly on the hob with tare functions, progressive weighing and memory, through an intuitive interface.



NikolaTesla Libra Black



DIMENSIONAL DRAWING

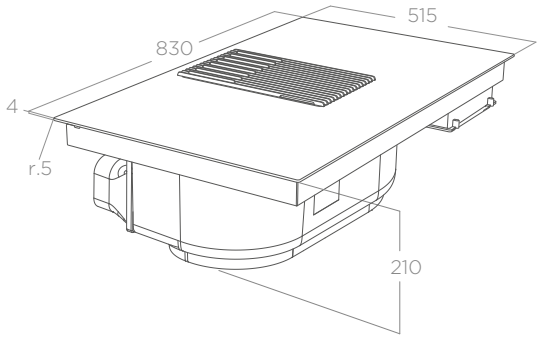

TECHNICAL SPECIFICATIONS

Size	83×51,5×21 cm
Cut out	80,7×49,2 cm
Version	Duct-out convertible to filtering
Finishing	Black glass + cast iron, White glass “ice grey” + cast iron

▪ Aluminium grease filter included

FEATURES

- Bridge Zone
- Child Lock
- Autocapture
- Stop&Go
- Warming Mode
- Timer
- Delay Switch Off
- Maintenance Alarm

ASPIRATION

	Duct-out	Filtering
Controls	Touch Control Slider 4S+B	
Booster airflow	600 m³/h	550 m³/h
Noise level min-max	38-64 dB(A)	41-67 dB(A)
Absorption	160 W	160 W
Energy class	A+	A+
Grease filtration class	B	B

ACCESSORIES

Filtering kit PLINTH IN	KIT0199835
Filtering kit PLINTH OUT	KIT0199836
Filtering kit BACK OUTLET	KIT0199838
Kit EVO Central Outlet	KIT0199839
Kit EVO filter	KIT0200786

COOKING

Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	3,1-4,5 kW
Voltage	220-240V / 380-415V 2N / 380-415V 3N
Cooking zones	1 210×191 mm - 1,65/1,85 kW 2 210×191 mm - 2,1/3 kW 3 210×191 mm - 2,1/3 kW 4 210×191 mm - 1,65/1,85 kW
Bridge zone	2

MODELS

NIKOLATESLA LIBRA EVO BL/A/83	PRF0196340
NIKOLATESLA LIBRA EVO WH/A/83	PRF0196339

NikolaTesla Flame

Design Fabrizio Crisà

9 PRODUCT DESIGN AWARDS WINNER
Pag. 16

■

GAS ASPIRATION HOB

In 2018, the first on the European market. A synthesis between flame tradition and integrated extraction innovation, with high performance and safety.

■

MULTI FLEXI SPACE


Cross-shaped grids with a continuous surface allow larger pots to slide without lifting them. Plus a practical support surface.



NikolaTesla Flame Black



DIMENSIONAL DRAWING

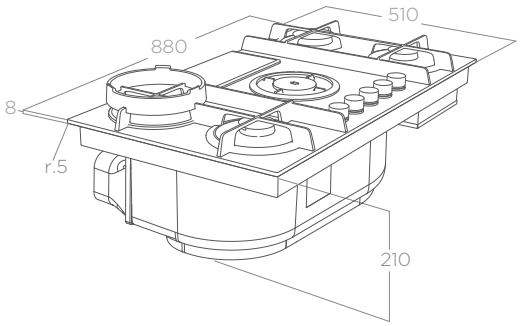

TECHNICAL SPECIFICATIONS

Size	88×51×21 cm
Cut out	84×48,7 cm
Version	Duct-out convertible to filtering
Finishing	Black glass + cast iron, Grey glass + cast iron

▪ Aluminium grease filter included

FEATURES

- Dual Zone
- Delay Switch Off
- Maintenance Alarm

ASPIRATION

	Duct-out	Filtering
Controls	Rotative 3S+2B	
Booster airflow	600 m^3/h	530 m^3/h
Noise level min-max	45-63 dB(A)	49-69 dB(A)
Absorption Tot.	250 W	250 W
Energy class	A	A
Grease filtration class	B	B

ACCESSORIES

Filtering kit PLINTH IN	KIT0199835
Filtering kit PLINTH OUT	KIT0199836
Filtering kit BACK OUTLET	KIT0199838
Kit EVO Central Outlet	KIT0199839
Kit EVO filter	KIT0200786
Kit WOK FLAME	KIT0160040

COOKING

Controls	Rotative
Voltage	220-240V
Cooking zones	1° - Semirapid (1,75 kW) 2° - Dual (3,5 kW) 3° - Rapid (3 kW) 4° - Semirapid (1,75 kW)

MODELS

NIKOLATESLA FLAME EVO BL/A/88	PRF0196341
NIKOLATESLA FLAME EVO GR/A/88	PRF0196343

Installation.
NikolaTesla Evo Collection.

Duct-out Installation.

NikolaTesla duct-out models offer highly flexible installation. The optional piping by Elica (which can be purchased separately) allows fumes to be conveyed towards the outlet point outside the home.



Example of rear outlet



Example of side outlet




Kit Central Outlet
KIT0199839

Contains:
- 90° - 94×227 mm rectangular bend
- 15° Connections (4 pieces)
- 500×94×227 mm rectangular pipe
- Adhesive Tape

Extractor hobs in the EVO platform have an air outlet on the right side of each appliance. The EVO Central Outlet kit allows piping to be directed towards the centre, so as to avoid any obstructions between them and the cabinet feet.



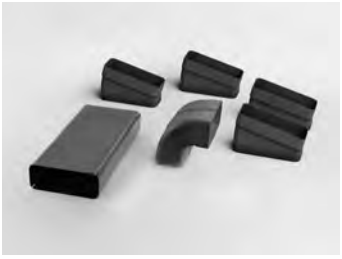

Filtering installation.

1. Plinth in
KIT0199835

Contains:
- EVO filter (grease and odour)
- 15° Connections (4 pieces)
- 90° - 94×227 mm rectangular bend
- 500 × 94×227 mm rectangular pipe
- 90° rectangular bend from vert. 94×227 mm to horiz. 55x 227mm
- Under baseboard deflector
- Chrome-plated trim
- Adhesive Tape

Filtering installation kit under plinth (min h6cm)

With this kit, the product can be installed in filtering mode.
The filtered air is directed into the plinth and gently flows out the vent opening, which can be decorated with the chrome-plated trim included with the appliance





2. Plinth Out
KIT0199836

Contains:
- EVO filter (grease and odour)
- 15° Connections (4 pieces)
- 90° - 94×227 mm rectangular bend
- 500 × 94×227 mm rectangular pipe
- 90° rectangular bend from vert. 94×27 mm to horiz. 50×227 mm
- Outlet connection to be fitted outside the baseboard, provided with chrome-plated trim
- 218 × 55×300 mm rectangular pipe
- Outlet connection support
- Adhesive tape

Filtering installation kit out of the plinth (min h6cm)

This kit allows you to install your appliance in filtering mode, directing purified air out through the plinth using a special funnel-shaped duct (which ends with an elegant trim for the vent opening).





3. Back Outlet
KIT0199838

Contains:
- EVO filter (grease and odour)
- Telescopic outlet connection
- Chrome-plated trim

Filtering installation kit

This kit allows you to convert the appliance into filtering mode.
The airflow is directed towards the back and left to flow out the plinth thanks to the vent opening, which can be finished with the supplied chrome-plated trim.





KIT0200786
Kit EVO filter

A grease filter featuring 6 aluminium layers, that can be washed by hand or in the dishwasher;


An odour filter, made of a special reticulated polyurethane foam coated with spherical activated charcoal, which can be regenerated to reduce the frequency of replacement.




Buy on
Elica Shop


Technical drawings


NikolaTesla One / One HP

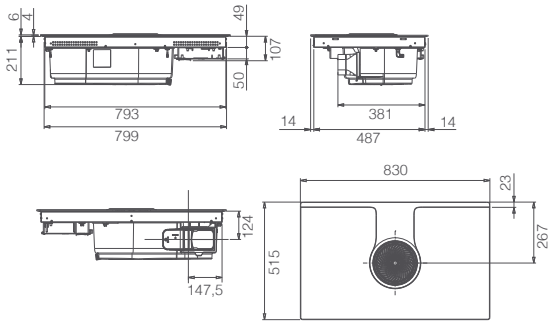

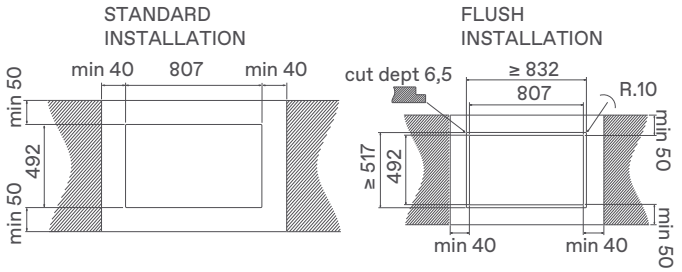



NikolaTesla Unplugged

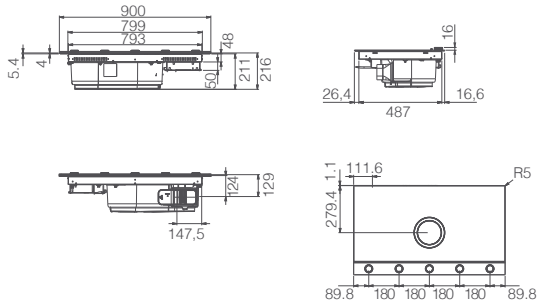

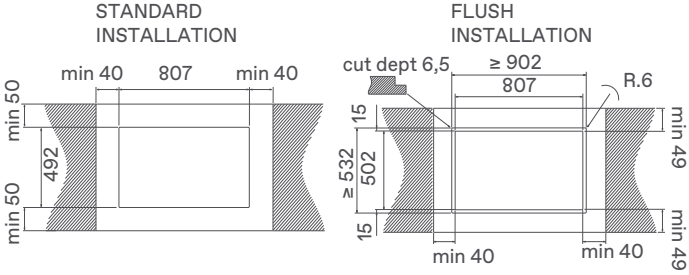



NikolaTesla Switch Glow / Switch

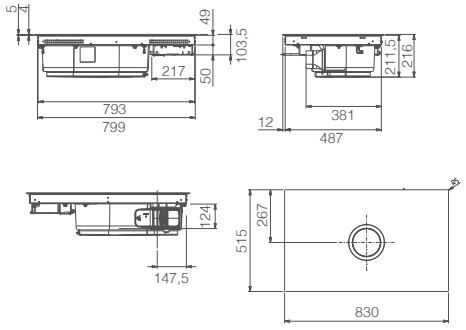

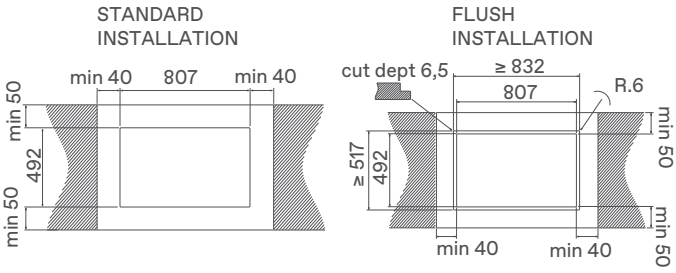



NikolaTesla Libra

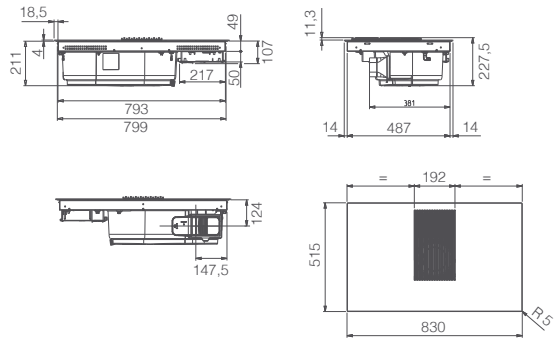

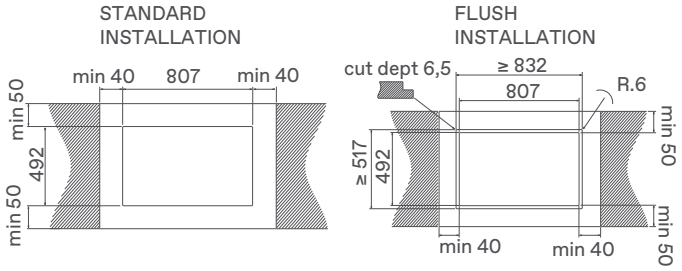


NikolaTesla Flame

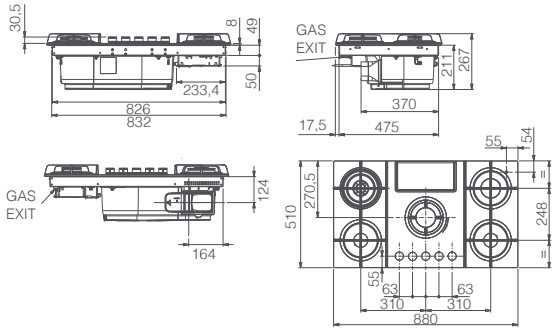

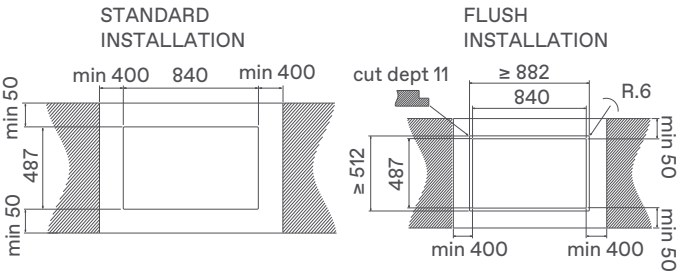

NikolaTesla

Aspiration Hobs

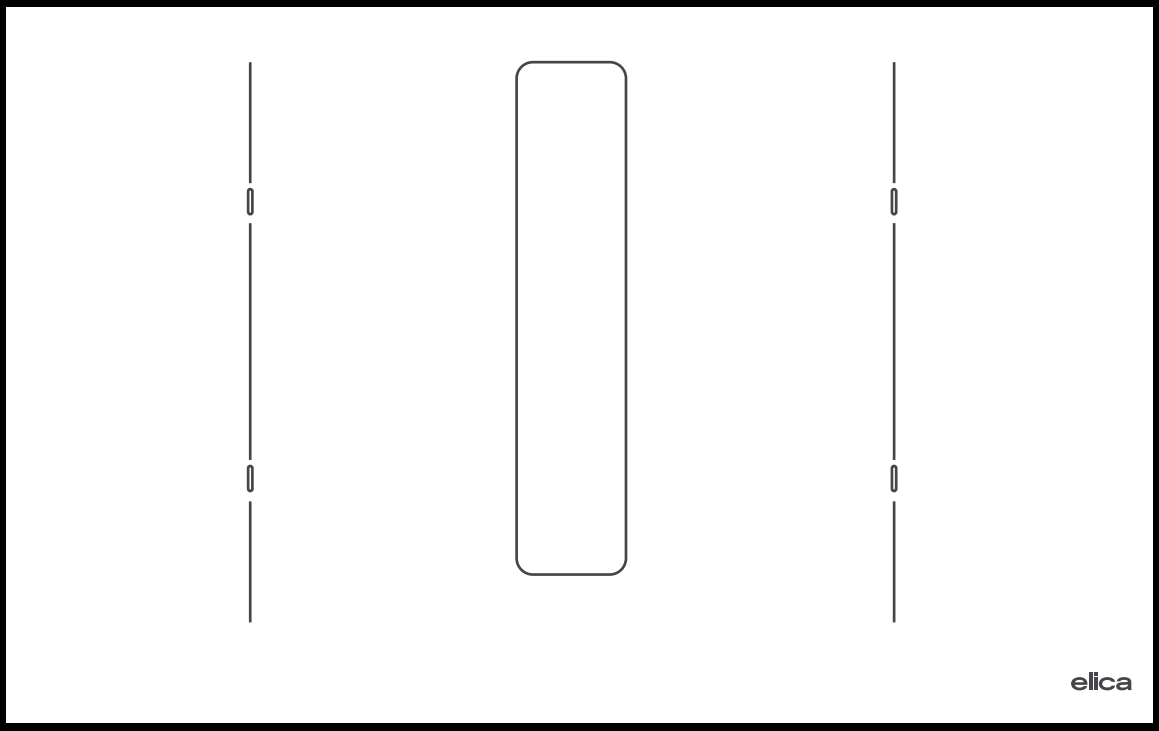

elica
5 Years Premium Warranty

Electronic and mechanical components.
Registration within 90 days of purchase at elica.com (see p. 376).

4.2 Suit S Collection

The new Suit S collection features models just 19.4 cm high. Available in various sizes, they are designed to suit different space and layout requirements.

Exceptional design.

The stunning aesthetics features elegant and discreet rectangular glass elements or aluminium grilles, either completely flush or raised, with minimalist or bold serigraphs. To enhance every kitchen design with style.

Compact outside, complete inside.

Suit S extractor hobs filter grease and odours thanks to the aluminium filter and Odour Shield filters. All models in the collection are Energy Class A+.

Space Saving Solution.

The overall height of the products has been reduced by 20% compared to the previous range, to just 19.4 cm: a versatile solution that fits into any kitchen base unit (from 60 cm), while also increasing usable space.

There is a hob for every space.

This line is designed to meet any requirements in terms of size and layout, aesthetics and features.
Models are available in 60, 72, 78, and 83 cm versions.

NikolaTesla Suit S Collection. All the advantages, in detail.



Super slim dimensions

The new NikolaTesla Suit S collection represents the evolution of the previous range, while maintaining its now iconic aesthetics in a Super Slim version of only 19.4 cm.
The product depth has been reduced by 20%, significantly increasing the storage space of the first drawer: a concrete kitchen advantage, where every centimetre is valuable for storing cutlery, cookware and textiles.

More space outside, complete inside.

The evolution of the Suit S platform includes:

All models in Energy Class A+

Class B grease filtration, thanks to the aluminium filter and practical collection tray.

New “Odour Shield Filters”, designed to filter cooking odours with 80% efficiency (EN 61591:2025). On-demand regeneration, with ceramic odour filters available as accessories.





Tailor-made solutions.

Within our range, you will find solutions that combine design, ergonomics and efficiency for a tailor-made result.

- **3 cooking zones:** since 2021, NikolaTesla Fit 3Z has been the first 60 cm extractor hob in Europe with a 30 cm XL zone.
- **Smart Power Management:** NikolaTesla Alpha B manages heat intelligently, with rapid boiling and consistent results even at limited power.

Control and functionality in the kitchen.

Cooking functions and performance designed to simplify your kitchen experience, thanks to:

- **Slider control:** an intuitive interface that puts every function within easy reach.
- **Bridge Zone:** the flexibility to combine two adjacent zones for large pots and pans.
- **Warming Mode:** perfect for keeping ready meals warm or reheating them, or for slow cooking at a controlled temperature.

NikolaTesla Fit XL

Design Fabrizio Crisà

9 PRODUCT DESIGN AWARDS WINNER

Pag. 16

FLUSH DESIGN

When suction is off, the hob appears perfectly linear, elegant and easy to clean.


RAW FINISHING

The elegant matt black finish offers high resistance to scratches, reduced visibility of fingerprints and easy cleaning.





DIMENSIONAL DRAWING

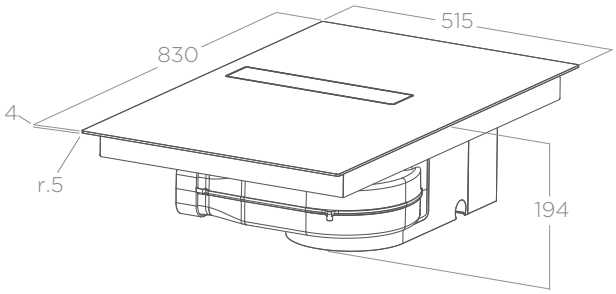

TECHNICAL SPECIFICATIONS

Size	83×51,5×19,4 cm
Cut out	75×49 cm
Version	Duct-out convertible to filtering
Finishing	Black glass, Matt black glass

▪ Aluminium grease filter included

FEATURES

- Bridge Zone
- Child Lock
- Autocapture
- Stop&Go
- Warming Mode
- Timer
- Delay Switch Off
- Maintenance Alarm

ASPIRATION

	Duct-out	Filtering
Controls	Touch Control Slider 4S+B	
Booster airflow	620 m^3/h	580 m^3/h
Noise level min-max	42-69 dB(A)	51-75 dB(A)
Absorption	350 W	350 W
Energy class	A+	A+
Grease filtration class	B	B

ACCESSORIES

Filtering kit PLINTH IN	KIT0210770
Filtering kit PLINTH OUT	KIT0210771
Filtering kit BACK OUTLET	KIT0210772
Kit EVO Central Outlet	KIT0210895
Deep base unit ducting kit	KIT0210896
Odour filter “Odour Shield”	KIT0210897
HP regenerable odour ceramic filter	KIT0210894

COOKING

Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	3,1-4,5 kW
Voltage	220-240V / 380-415V 2N / 380-415V 3N
Cooking zones	1 210×191 mm - 1,65/1,85 kW 2 210×191 mm - 2,1/3 kW 3 210×191 mm - 2,1/3 kW 4 210×191 mm - 1,65/1,85 kW
Bridge zone	2

MODELS

NIKOLATESLA FIT XL SL BL/A/83	PRF0210734
NIKOLATESLA FIT XL SL RAW BR/A/83	PRF0210735



NikolaTesla Fit XL RAW →

elica

NikolaTesla Fit

Design Fabrizio Crisà

9 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

FLUSH DESIGN

When suction is off, the hob appears perfectly linear, elegant and easy to clean.

■

RAW FINISHING


The elegant matt black finish offers high resistance to scratches, reduced visibility of fingerprints and easy cleaning.



NikolaTesla Fit Black glass 72cm



DIMENSIONAL DRAWING

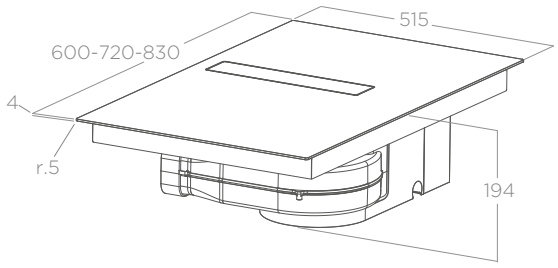

TECHNICAL SPECIFICATIONS

Size	60×51,5×19,4 cm (60) / 72×51,5×19,4 cm (72) 83×51,5×19,4 cm (83)
Cut out	56×49 cm (60-72) / 75×49 cm (83)
Version	Duct-out convertible to filtering
Finishing	Black glass, Matt black glass

▪ Aluminium grease filter included

FEATURES

- Bridge Zone
- Child Lock
- Autocapture
- Stop&Go
- Warming Mode
- Timer
- Delay Switch Off
- Maintenance Alarm

ASPIRATION

	Duct-out	Filtering
Controls	Touch Control Slider 4S+B	
Booster airflow	620 m³/h	580 m³/h
Noise level min-max	42-69 dB(A)	51-75 dB(A)
Absorption	350 W	350 W
Energy class	A+	A+
Grease filtration class	B	B

ACCESSORIES

Filtering kit PLINTH IN	KIT0210770
Filtering kit PLINTH OUT	KIT0210771
Filtering kit BACK OUTLET	KIT0210772
Kit EVO Central Outlet	KIT0210895
Deep base unit ducting kit	KIT0210896
Odour filter “Odour Shield”	KIT0210897
HP regenerable odour ceramic filter	KIT0210894

COOKING

Controls	Touch Control Slider 9P+B	
Absorption	7,2 kW	
Power limitation	3,1-4,5 kW	
Voltage	220-240V / 380-415V 2N / 380-415V 3N	
Cooking zones	(60/72 cm) 1 210×191mm - 2,1/3kW 2 210×191mm - 1,65/1,85kW 3 Ø200mm - 2,3/3kW 4 Ø160mm - 1,2/1,4kW	(83 cm) 1 210×191mm - 1,65/1,85kW 2 210×191mm - 2,1/3kW 3 Ø200mm - 2,3/3kW 4 Ø160mm - 1,2/1,4kW
Bridge zone	1 left	1 left

MODELS

NIKOLATESLA FIT SL BL/A/60	PRF0210739
NIKOLATESLA FIT SL RAW BR/A/60	PRF0210740
NIKOLATESLA FIT SL BL/A/72	PRF0210741
NIKOLATESLA FIT SL RAW BR/A/72	PRF0210746
NIKOLATESLA FIT SL BL/A/83	PRF0210738


OIL
RAPESEED
elica



← NikolaTesla Fit RAW 60cm

NikolaTesla Fit 3Z

Design Fabrizio Crisà

2 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

FLUSH DESIGN

When suction is off, the hob appears perfectly linear, elegant and easy to clean.

■

EXTRA-LARGE ZONE

Cooking zone for pots up to 30 cm, with up to 3.6 kW of power for fast cooking.

■


FAST BOILING

Activate maximum power for fast boiling. Also ideal for repeated frying, keeping food crispy and tasty.





DIMENSIONAL DRAWING

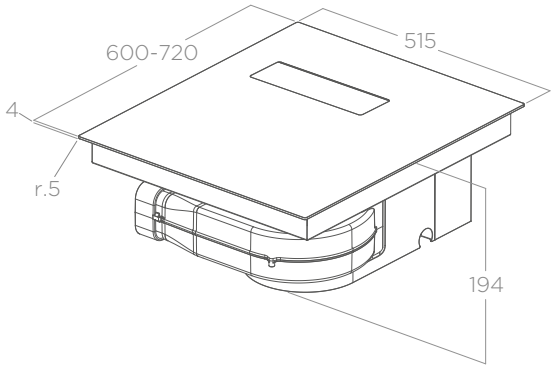

TECHNICAL SPECIFICATIONS

Size	60×51,5×19,4 cm (60) / 72×51,5×19,4 cm (72)
Cut out	56×49 cm
Version	Duct-out convertible to filtering
Finishing	Black glass

▪ Aluminium grease filter included

FEATURES

- Autocapture
- Child Lock
- Dual Zone
- Stop&Go
- Warming Mode
- Timer
- Delay Switch Off
- Maintenance Alarm

ASPIRATION

	Duct-out	Filtering
Controls	Touch Control Slider 4S+B	
Booster airflow	620 m^3/h	580 m^3/h
Noise level min-max	42-69 dB(A)	51-75 dB(A)
Absorption	350 W	350 W
Energy class	A+	A+
Grease filtration class	B	B

ACCESSORIES

Filtering kit PLINTH IN	KIT0210770
Filtering kit PLINTH OUT	KIT0210771
Filtering kit BACK OUTLET	KIT0210772
Kit EVO Central Outlet	KIT0210895
Deep base unit ducting kit	KIT0210896
Odour filter “Odour Shield”	KIT0210897
HP regenerable odour ceramic filter	KIT0210894

COOKING

Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	3,1-4,5 kW
Voltage	220-240V / 380-415V 2N / 380-415V 3N
Cooking zones	1 Ø300-180 mm - 2,5/3,6 kW - 2,1/2,8 kW 2 Ø140 mm - 0,9/1,35 kW 3 Ø180 mm - 1,4/2,1 kW

MODELS

NIKOLATESLA FIT 3Z SL BL/A/60	PRF0211838
NIKOLATESLA FIT 3Z SL BL/A/72	PRF0211839







NikolaTesla Fit 3Z →

NikolaTesla Prime S +

Design Fabrizio Crisà

1 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■


RAW FINISHING

The elegant matt black finish offers high resistance to scratches, reduced visibility of fingerprints and easy cleaning.





DIMENSIONAL DRAWING

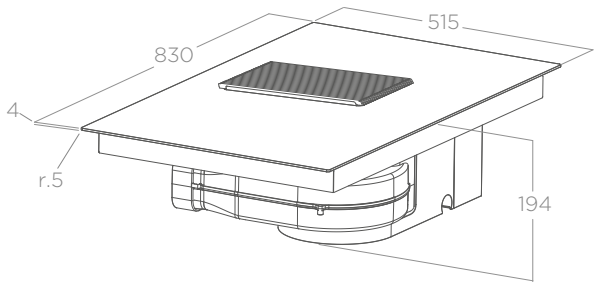

TECHNICAL SPECIFICATIONS

Size	83×51,5×19,4 cm
Cut out	75×49 cm
Version	Duct-out convertible to filtering
Finishing	Black glass + black aluminium Matt black glass + black aluminium

▪ Matt black glass + black aluminium

FEATURES

- Bridge Zone
- Child Lock
- Autocapture
- Stop&Go
- Warming Mode
- Timer
- Delay Switch Off
- Maintenance Alarm

ASPIRATION

	Duct-out	Filtering
Controls	Touch Control Slider 4S+B	
Booster airflow	640 m³/h	590 m³/h
Noise level min-max	42-69 dB(A)	51-76 dB(A)
Absorption	350 W	350 W
Energy class	A+	A+
Grease filtration class	B	B

ACCESSORIES

Filtering kit PLINTH IN	KIT0210770
Filtering kit PLINTH OUT	KIT0210771
Filtering kit BACK OUTLET	KIT0210772
Kit EVO Central Outlet	KIT0210895
Deep base unit ducting kit	KIT0210896
Odour filter “Odour Shield”	KIT0210897
HP regenerable odour ceramic filter	KIT0210894

COOKING

Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	3,1-4,5 kW
Voltage	220-240V / 380-415V 2N / 380-415V 3N
Cooking zones	1 210×191 mm - 1,65 / 1,85 kW 2 210×191 mm - 2,1 / 3 kW 3 Ø200 mm - 2,3/3 kW 4 Ø160 mm - 1,2/1,4 kW
Bridge zone	1 left

MODELS

NIKOLATESLA PRIME S+ SL BL/A/83	PRF0210552
NIKOLATESLA PRIME S+ SL RAW BL/A/83	PRF0210554

NikolaTesla Velvet

Design Fabrizio Crisà

■


VELVET DESIGN

Vertical lines on the glass and central flap create a pleasant velvety effect to the touch. An aesthetic capable of enhancing any kitchen style.





DIMENSIONAL DRAWING

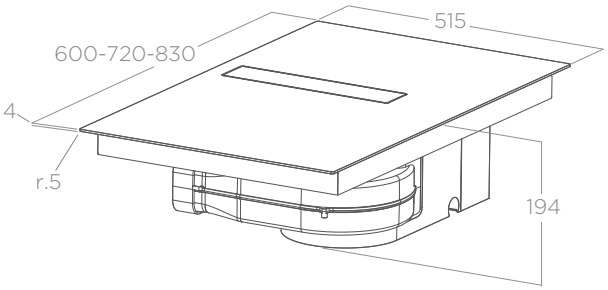

TECHNICAL SPECIFICATIONS

Size	60×51,5×19,4 cm (60) / 72×51,5×19,4 cm (72) 83×51,5×19,4 cm (83)
Cut out	56×49 cm (60-72) - 75×49 cm (83)
Version	Duct-out convertible to filtering
Finishing	Black glass + black plastic

▪ Aluminium grease filter included

FEATURES

- Bridge Zone
- Child Lock
- Autocapture
- Stop&Go
- Warming Mode
- Timer
- Delay Switch Off
- Maintenance Alarm

ASPIRATION

	Duct-out	Filtering
Controls	Touch Control Slider 4S+B	
Booster airflow	620 m³/h	580 m³/h
Noise level min-max	42-69 dB(A)	51-75 dB(A)
Absorption	350 W	350 W
Energy class	A+	A+
Grease filtration class	B	B

ACCESSORIES

Filtering kit PLINTH IN	KIT0210770
Filtering kit PLINTH OUT	KIT0210771
Filtering kit BACK OUTLET	KIT0210772
Kit EVO Central Outlet	KIT0210895
Deep base unit ducting kit	KIT0210896
Odour filter “Odour Shield”	KIT0210897
HP regenerable odour ceramic filter	KIT0210894

COOKING

Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	3,1-4,5 kW
Voltage	220-240V / 380-415V 2N / 380-415V 3N
Cooking zones	1 210×190 mm - 2,1/3 kW 2 210×190 mm - 1,65/1,85 kW 3 Ø200 mm - 2,3/3 kW 4 Ø160 mm - 1,2/1,4 kW
Bridge zone	1 left

MODELS

NIKOLATESLA VELVET SL BL/A/60	PRF0210756
NIKOLATESLA VELVET SL BL/A/72	PRF0210757
NIKOLATESLA VELVET SL BL/A/83	PRF0210754

Installation.
NikolaTesla Suit S.

Duct-out Installation.

These NikolaTesla models offer great installation flexibility, in the duct out version. The first 90° bend is included with all neutral duct-out codes. The optional piping offered by Elica (sold separately) allows fumes to be conveyed towards an outlet found outside the home.






Duct-out Installation
(duct-out version)

Central Outlet Kit
KIT0210895

Contains:
- 15° Connections (2 pieces)
- 500×94×227 mm rectangular pipe
- Adhesive Tape

The extractor hobs of the SUIT S platform feature an outlet shifted to the right side of the product.
The SUIT S Central Outlet kit allows ducting to be routed towards the centre, preventing possible interference between the ducts and the cabinet legs.



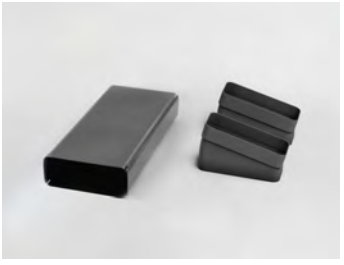

Kit for deep cabinets (70 cm/island)
KIT0210896

The kit for deep cabinets must be used as an alternative to the first 90° bend for installations in deep cabinets (≥ 70 cm) or in the case of a direct rear outlet in extraction mode.



Filtering installation.

1. Plinth In
KIT0210770

Contains:
- Odour Shield filter (2 pieces)
- 15° Connections (2 pieces)
- 500 × 94×227 mm rectangular pipe
- 90° rectangular bend from vert. 94×227 mm to horiz. 55x 227mm
- Under baseboard deflector
- Chrome-plated trim
- Adhesive Tape

Filtering installation kit under plinth (min h6cm)

With this kit, the product can be installed in filtering mode.
The filtered air is directed into the plinth and gently flows out the vent opening, which can be decorated with the chrome-plated trim included with the appliance.





Buy on
Elica Shop


2. Plinth Out
KIT0210771

Contains:
- Odour Shield filter (2 pieces)
- 15° Connections (2 pieces)
- 500 × 94×227 mm rectangular pipe
- 90° rectangular bend from vert. 94×27 mm to horiz. 50×227 mm
- Outlet connection to be fitted outside the baseboard, provided with chrome-plated trim
- 218 × 55×300 mm rectangular pipe
- Outlet connection support
- Adhesive tape

Filtering installation kit out of the plinth (min h6cm)

This kit allows you to install your appliance in filtering mode, directing purified air out through the plinth using a special funnel-shaped duct (which ends with an elegant trim for the vent opening).



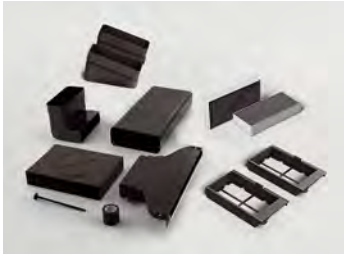


3. Back Outlet
KIT0210772

Contains:
- Odour Shield Filters, 2 pieces
- Telescopic outlet connection
- Chrome-plated trim profile

Filtering installation kit.


This kit allows you to convert the appliance into filtering mode. The airflow is directed towards the back and left to flow out the plinth thanks to the vent opening, which can be finished with the supplied chrome-plated trim.



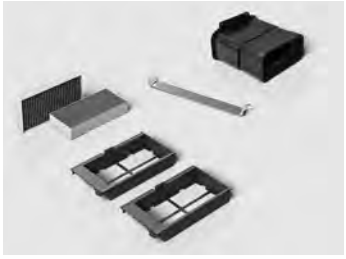

KIT0210897
Odour Shield filter

The Odour Shield filter has an odour filtration efficiency of 80% (EN 61591:2025). It should be replaced every 6 to 12 months, depending on use, following the instructions in the manual.

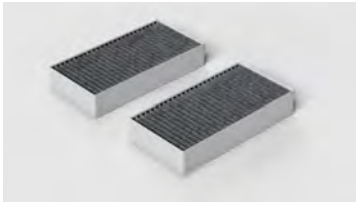


KIT0210894
HP regenerable odour ceramic filter

The ceramic filter is a modular charcoal filter that can be thermally regenerated in the oven, to reduce the frequency of replacement.




Technical drawings


NikolaTesla Fit XL - NikolaTesla Fit (83cm) - NikolaTesla Velvet (83cm)

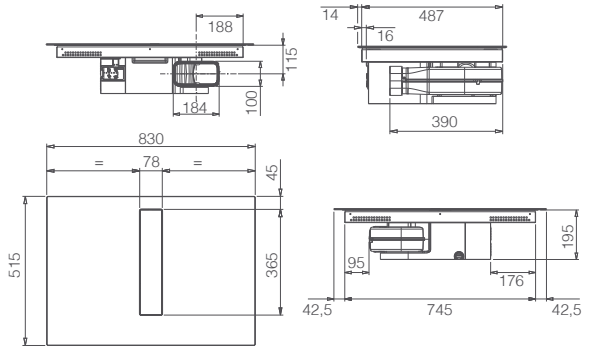


NikolaTesla Fit (60/72cm) - NikolaTesla Velvet (60/72cm)

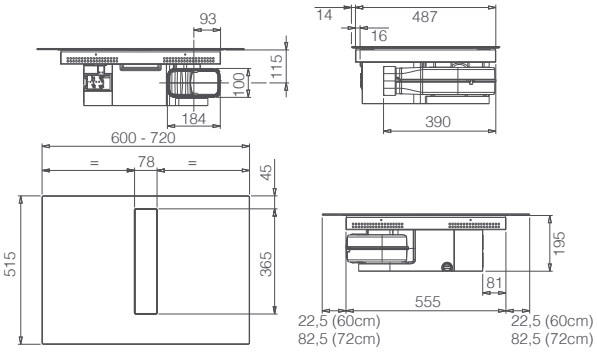


NikolaTesla Prime S+

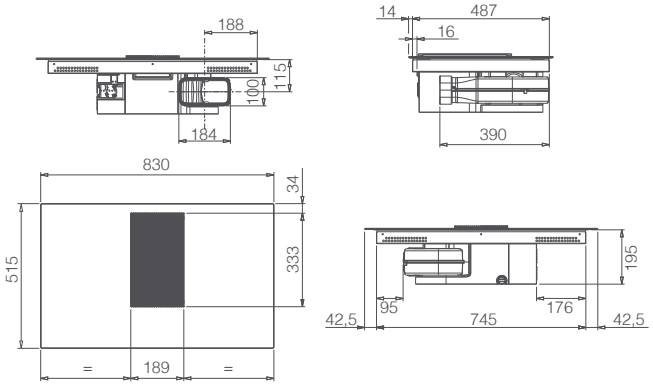


NikolaTesla Fit 3Z (60/72cm)

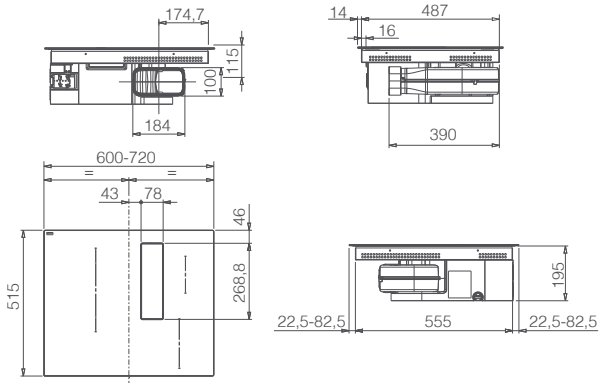


NikolaTesla Fit (60-72cm) - Velvet (60-72cm)

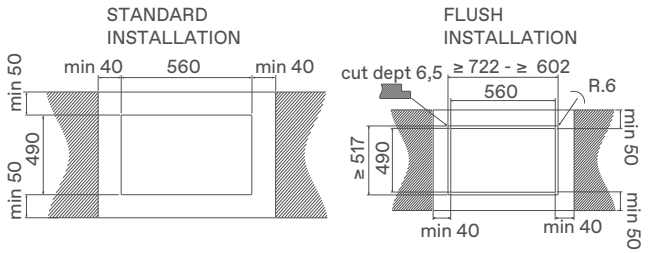

NikolaTesla Fit XL - NikolaTesla Velvet (83cm) - NikolaTesla Prime S+

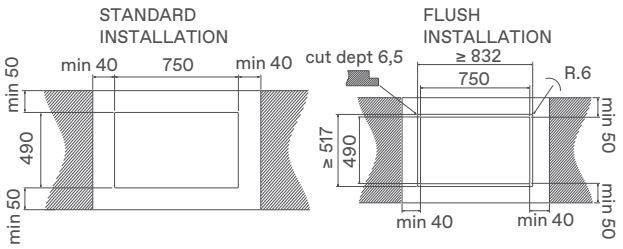


NikolaTesla Fit 3Z (60-72cm)

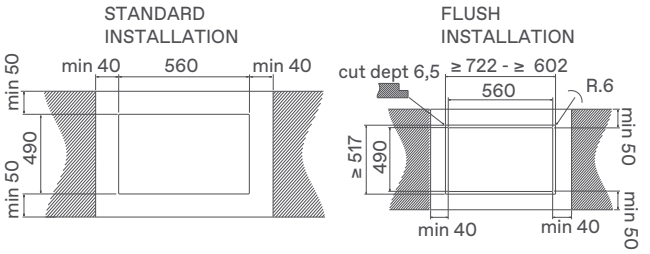


Accessories NikolaTesla Evo / NikolaTesla Suit S

Optional pipe fittings for duct-out version.


KIT0120991
222×89×1000 mm




KIT0173527
222×89×500 mm




KIT0120996
Ø150×500 mm



KIT0121000
Ø150×1000mm



KIT0121001
227×94×80mm




KIT0121002
15° 227×138×94mm



KIT0121003
Ø158X59mm



KIT0121004
90° 227×288×94mm



KIT0121005
90° - 227×94mm




KIT0121006
90° - Ø157mm




KIT0121007
227×94 - Ø146mm




KIT0121008
227×94 - Ø153mm




KIT0121009 (stainless steel)
int 216×82
ext 290×160 mm



KIT0121010 (stainless steel)
190×190 - Ø147mm




KIT0206255 (plastic)
190×190 - Ø147mm



KIT0126810
227×94×190/560 mm




KIT0161453
50 mm x 25 m



Optional pipe fittings for filtering version.

KIT0121012
218×55×500 mm



KIT0121013
218×55×1000 mm



KIT0121015
223×59X72 mm




KIT0121016
90° 218×55 mm



KIT0121017
218×55×190/590 mm



KIT0161453
50 mm x 25 m



KIT0168750
Deflector
under plinth



Buy on
Elica Shop

Comparative table
NikolaTesla Evo collection / NikolaTesla Suit S Collection

MODEL	NIKOLATESLA ONE HP	NIKOLATESLA UNPLUGGED	NIKOLATESLA SWITCH GLOW	NIKOLATESLA SWITCH	NIKOLATESLA ONE	NIKOLATESLA LIBRA	NIKOLATESLA FLAME
SIZE (CM)	83×51,5×21	90×53×21	83×51,5×21	83×51,5×21	83×51,5×21	83×51,5×21	88×51×21
CUT SIZE (CM)	80,7×49,2	80,7×49,2	80,7×49,2	80,7×49,2	80,7×49,2	80,7×49,2	84×48,7
FINISHING	Black glass / Matt black glass - RAW	Black glass / Black glass + stainless steel /Matt black glass-RAW	Black glass / Matt black glass - RAW	Black glass / White glass	Black glass / Matt black glass - RAW	Black glass+cast iron /White glass+cast iron	Black glass+cast iron /Grey glass+cast iron
VERSION	Duct-out convertible to filtering	Duct-out convertible to filtering	Duct-out convertible to filtering	Duct-out convertible to filtering	Duct-out convertible to filtering	Duct-out convertible to filtering	Duct-out convertible to filtering
TYPE OF GREASE FILTER	Dishwasher-safe aluminium	Dishwasher-safe aluminium	Dishwasher-safe aluminium	Dishwasher-safe aluminium	Dishwasher-safe aluminium	Dishwasher-safe aluminium	Dishwasher-safe aluminium
ASPIRATION CONTROLS	Slider Touch Control 9S+B	Electronic rotative 9S+B	Slider Touch Control 9S+B	Slider Touch Control 9S+B	Slider Touch Control 9S+B	Slider Touch Control 4S+B	Rotative 3S+2B
AIRFLOW M³/H: (BOOST) NOISE dBA: (MIN-MAX)	620 35 - 67	620 34 - 67	620 34 - 67	620 34 - 67	620 35 - 67	600 38 - 64	600 45 - 63
COOKING CONTROLS	Direct Touch Control Slider 9P+B	Electronic rotative 9P+B	Direct Slider Touch Control 9P+B	Direct Slider Touch Control 9P+B	Slider Touch Control 9P+B	Slider Touch Control 9P+B	Rotative
NUMBER OF HOB ZONES	4	4	4	4	4	4	4
MAX. POWER OF COOKING ZONES	2,1 / 3,7 kW	2,1 / 3,0 kW	2,1 / 3,0 kW	2,1 / 3,0 kW	2,1 / 3,0 kW	2,1 / 3,0 kW	3,5 kW
POWER LIMITATION (KW)	4,5	3,1 / 4,5	3,1 / 4,5	3,1 / 4,5	3,1 / 4,5	3,1 / 4,5	-
TOTAL ABSORPTION	7,2 kW	7,2 kW	7,2 kW	7,2 kW	7,2 kW	7,2 kW	250 W
ENERGY CLASS: EEI	A++	A++	A++	A++	A++	A+	A
RAW FINISHING	■	■	■	–	■	–	–
FLUSH DESIGN	–	■	■	■	–	–	–
EXTRALARGE ZONE	–	–	–	–	–	–	–
DIRECT INTERACTION	■	–	■	■	–	–	–
NATURAL INTERACTION	–	■	–	–	–	–	–
GAS ASP. HOBS	–	–	–	–	–	–	■
INTEGRATED SCALE	–	–	–	–	–	■	–
FAST BOILING	■	–	–	–	–	–	–
MULTIFLEXI SPACE	–	–	–	–	–	–	■
VELVET DESIGN	–	–	–	–	–	–	–
BRIDGE ZONE (NO.)	2	2	2	2	1	2	–
AIRMATIC	–	–	■	■	–	–	–
AUTOCAPTURE	■	■	–	–	■	■	–
DUAL ZONE	–	–	–	–	–	–	■
MELTING	■	■	–	–	–	–	–
WARMING	■	■	■	■	■	■	–
SIMMERING	■	■	–	–	–	–	–
POT SELF DETECTION	■	–	–	–	–	–	–
DELAY SWITCH-OFF	■	■	■	■	■	■	■
CHILD LOCK	■	■	■	■	■	■	–
STOP&GO	■	–	■	■	■	■	–
RECALL	■	–	■	■	–	–	–
TIMER	■	–	■	■	■	■	–
MAINTENANCE ALARM	■	■	■	■	■	■	■

	NIKOLATESLA FIT XL	NIKOLATESLA FIT	NIKOLATESLA FIT 3Z	NIKOLATESLA PRIME S+	NIKOLATESLA VELVET
	83×51,5×19,4	60/72/83×51,5×19,4	60/72×51,5×19,4	83×51,5×19,4	60/72/83×51,5×19,4
	75×49	56×49	56×49	75×49	56×49 (60-72) 75×49 (83)
	Black glass / Matt black glass - RAW	Black glass / Matt black glass - RAW	Black glass	Black glass / Matt black glass - RAW	Black glass
	Duct-out convertible to filtering	Duct-out convertible to filtering	Duct-out convertible to filtering	Duct-out convertible to filtering	Duct-out convertible to filtering
	Dishwasher-safe aluminium	Dishwasher-safe aluminium	Dishwasher-safe aluminium	Dishwasher-safe aluminium	Dishwasher-safe aluminium
	Slider Touch Control 4S+B	Slider Touch Control 4S+B	Slider Touch Control 4S+B	Slider Touch Control 4S+B	Slider Touch Control 4S+B
	620 42 - 69	620 42 - 69	620 49 - 69	640 42 - 69	620 42 - 69
	Slider Touch Control 9P+B	Slider Touch Control 9P+B	Slider Touch Control 9P+B	Slider Touch Control 9P+B	Slider Touch Control 9P+B
	4	4	3	4	4
	2,1 / 3,0 kW	2,1 / 3,0 kW	2,5 / 3,6 kW	2,1 / 3,0 kW	2,1 / 3,0 kW
	3,1 / 4,5	3,1 / 4,5	3,1 / 4,5	3,1 / 4,5	3,1 / 4,5
	7,2 kW	7,2 kW	7,2 kW	7,2 kW	7,2 kW
	A+	A+	A+	A+	A+
	■	■	–	■	–
	■	■	■	–	–
	–	–	■	–	–
	–	–	–	–	–
	–	–	–	–	–
	–	–	–	–	–
	–	–	–	–	–
	–	–	■	–	–
	–	–	–	–	–
	–	–	–	–	■
	2	1	–	1	1
	–	–	–	–	–
	■	■	■	■	■
	–	–	■	–	–
	–	–	–	–	–
	■	■	■	■	■
	–	–	–	–	–
	–	–	–	–	–
	■	■	■	■	■
	■	■	■	■	■
	■	■	■	■	■
	–	–	–	–	–
	■	■	■	■	■
	■	■	■	■	■

Induction Hobs

Elica presents a complete range of induction hobs in terms of sizes, configurations and functions. Two ranges: Ratio Connex and Primis, each with its own personality but all distinguished by the uniqueness of Elica design.


5

One collection, endless possibilities.

Our induction hobs combine aesthetic versatility with outstanding functionality.
Glossy and matte Raw finishes; models with 4 cooking zones in 80 and 60 cm versions, with bridge zone; models with 3 zones in 80 and 60 cm; compact 30 cm models with 2 zones; an 87 cm model with 4 inline zones; and the new 90 cm Ratio Connex model with 5 cooking zones.



Induction Hobs

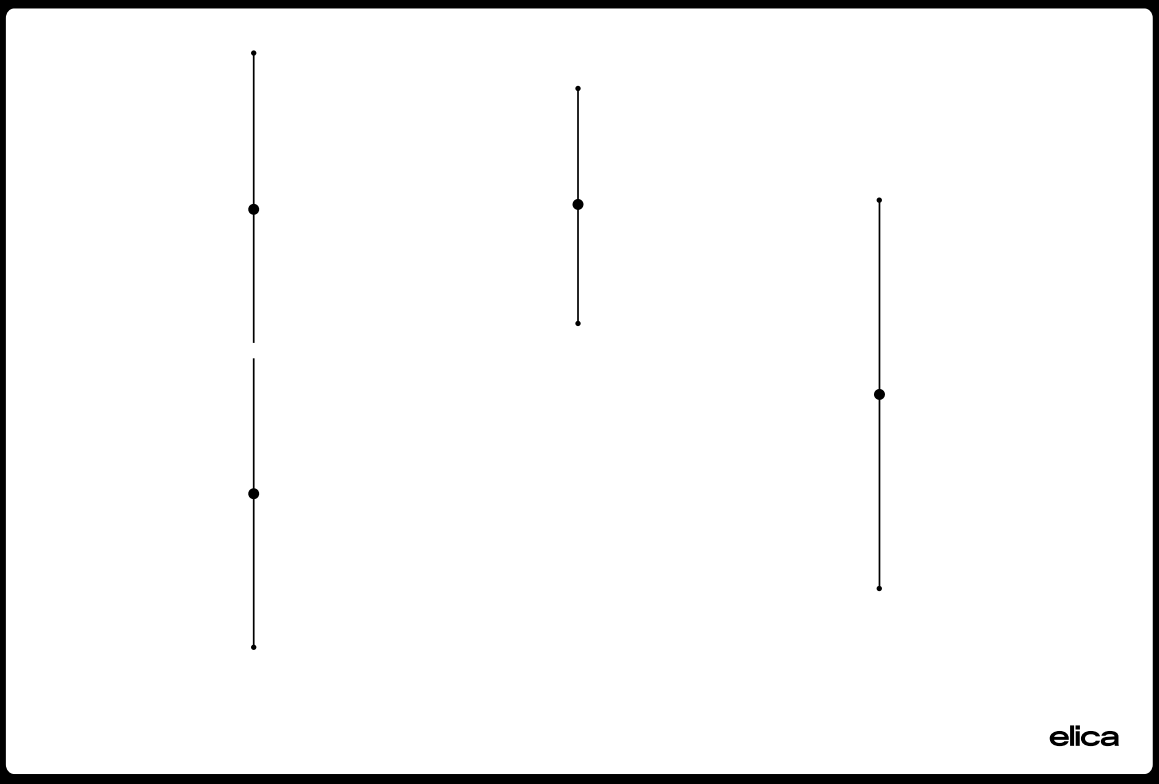

elica
7 Years Premium Warranty

Electronic and mechanical components.
Registration within 90 days of purchase at elica.com (see p. 376).

5.1 Ratio Connex

Minimal aesthetics, intuitive interaction and constant connection. The hobs integrate and communicate with the hood for coordinated control.

Multi Connection

The connection between hood and hob automatically adjusts extraction power according to the selected cooking level.

Minimal Design

The total black look of the glass, either on the glossy and the RAW matte finishing, features minimal silk-screening for an essential and elegant effect. The interface disappears when the hob is switched off, providing a look of refined simplicity.

Bridge zone for larger cookware

All Ratio Connex hobs feature at least one Bridge zone on the left-hand side. This function allows two adjacent cooking zones to be combined into a single larger area, ideal for grills or oversized cookware, for even heat across the entire surface.

Easy Control

The cooking zones are controlled via a touch slider interface. Automatic modes, the Bridge function and Stop&Go to pause cooking are always available with a simple touch. Power levels, timers and all active functions are displayed through dedicated indicators.

Ratio Connex 905 Plus

Design Fabrizio Crisà



- **EXTRA LARGE ZONE**
- **FAST BOILING**
- **MULTI CONNECTION**
- **RAW FINISHING**

TECHNICAL SPECIFICATIONS

91×52 cm	
86×49 cm (cut)	
Black glass, Matt black glass	

FEATURES

- Bridge Zone
- Child Lock
- Dual Zone
- Stop&Go
- Warming Mode
- Timer

COOKING

Controls	Touch Control Slider 9P+B
Absorption	10,8 kW
Power limitation	3,1 kW - 4,5 kW - 7,2 kW
Voltage	220-240V / 380-415V 2N / 380-415V 3N
Cooking zones	1 210×191mm - 2,1/3 kW 2 210×191mm - 2,1/3 kW 3 0300-180mm - 2,5/3,6 kW - 2,1/2,8 kW 4 210×191mm - 2,1/3 kW 5 210×191mm - 2,1/3 kW
Bridge Zone	2

MODELS

RATIO CONNEX 905 PLUS BL	PRF0211648
RATIO CONNEX 905 PLUS RAW (*)	PRF0218061

(*) Available from January 2027

Ratio Connex 804 Plus

Design Fabrizio Crisà



- **MULTI CONNECTION**
- **ERGONOMIC COOKING LAYOUT**
- **RAW FINISHING**

TECHNICAL SPECIFICATIONS
78×52 cm
75×49 cm (cut)
Black glass, Matt black glass

FEATURES

- Bridge Zone
- Stop&Go
- Warming Mode
- Timer
- Child Lock

COOKING	
Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	3,1 kW - 4,5 kW
Voltage	220-240V / 380-415V 2N
Cooking zones	1 210×191mm - 2,1/3 kW 2 210×191mm - 2,1/3 kW 3 Ø160mm - 1,4/1,85kW 4 Ø265mm - 2,3/3kW
Bridge Zone	1 left

MODELS	
RATIO CONNEX 804 PLUS BL	PRF0199855
RATIO CONNEX 804 PLUS RAW	PRF0210636



↑ Ratio Connex 804 Plus RAW

Ratio Connex 803 Plus

Design Fabrizio Crisà



- **MULTI CONNECTION**
- **EXTRA LARGE ZONE**
- **FAST BOILING**

TECHNICAL SPECIFICATIONS
78×52 cm
75×49 cm (cut)
Black glass

FEATURES

- Bridge Zone
- Child Lock
- Dual Zone
- Stop&Go
- Warming Mode
- Timer

COOKING	
Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	3,1 kW - 4,5 kW
Voltage	220-240V / 380-415V 2N
Cooking zones	1 210x191mm - 2,1/3kW 2 210x191mm - 2,1/3kW 3 Ø300-180mm - 2,5/3,6 kW - 2,1/2,8 kW
Bridge Zone	1 left

MODELS	
RATIO CONNEX 803 PLUS BL	PRF0199856

Ratio Connex 604 Plus

Design Fabrizio Crisà

- **MULTI CONNECTION**
- **RAW FINISHING**



TECHNICAL SPECIFICATIONS

59×52 cm	
56×48 cm (cut)	
Black glass, Matt black glass	

FEATURES

- Bridge Zone
- Stop&Go
- Warming Mode
- Timer
- Child Lock

COOKING

Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	3,1 kW - 4,5 kW
Voltage	220-240V / 380-415V 2N
Cooking zones	1 210×191mm - 2,1/3 kW 2 210×191mm - 2,1/3 kW 3 Ø160mm - 1,4/2,1kW 4 Ø200mm - 2,3/3kW
Bridge Zone	1 left

MODELS

RATIO CONNEX 604 PLUS BL	PRF0199851
RATIO CONNEX 604 PLUS RAW	PRF0210635

Ratio Connex 603 Plus

Design Fabrizio Crisà



- **MULTI CONNECTION**
- **EXTRA LARGE ZONE**
- **FAST BOILING**
- **RAW FINISHING**

TECHNICAL SPECIFICATIONS

59×52 cm

56×48 cm (cut)

Black glass, Matt black glass

FEATURES

- Bridge Zone
- Child Lock
- Dual Zone
- Stop&Go
- Warming Mode
- Timer

COOKING

Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	3,1 kW - 4,5 kW
Voltage	220-240V / 380-415V 2N
Cooking zones	1 210x191mm - 2,1/3kW 2 210x191mm - 2,1/3kW 3 Ø300-180mm - 2,5/3,6kW - 2,1/2,8kW
Bridge Zone	1 left

MODELS

RATIO CONNEX 603 PLUS BL	PRF0199854
RATIO CONNEX 603 PLUS RAW	PRF0210634

Ratio Connex 302 Plus

Design Fabrizio Crisà

■ **MULTI CONNECTION**



TECHNICAL SPECIFICATIONS
29×52 cm
27×49 cm (cut)
Black glass

FEATURES


- Bridge Zone
- Stop&Go
- Warming Mode
- Timer
- Child Lock

COOKING	
Controls	Touch Control Slider 9P+B
Absorption	3,6 kW
Power limitation	3,1 kW
Voltage	220-240V
Cooking zones	1 210×191mm - 2,1/3 kW 2 210×191mm - 2,1/3 kW
Bridge Zone	1

MODELS

RATIO CONNEX 302 PLUS BL	PRF0199850

Induction Hobs

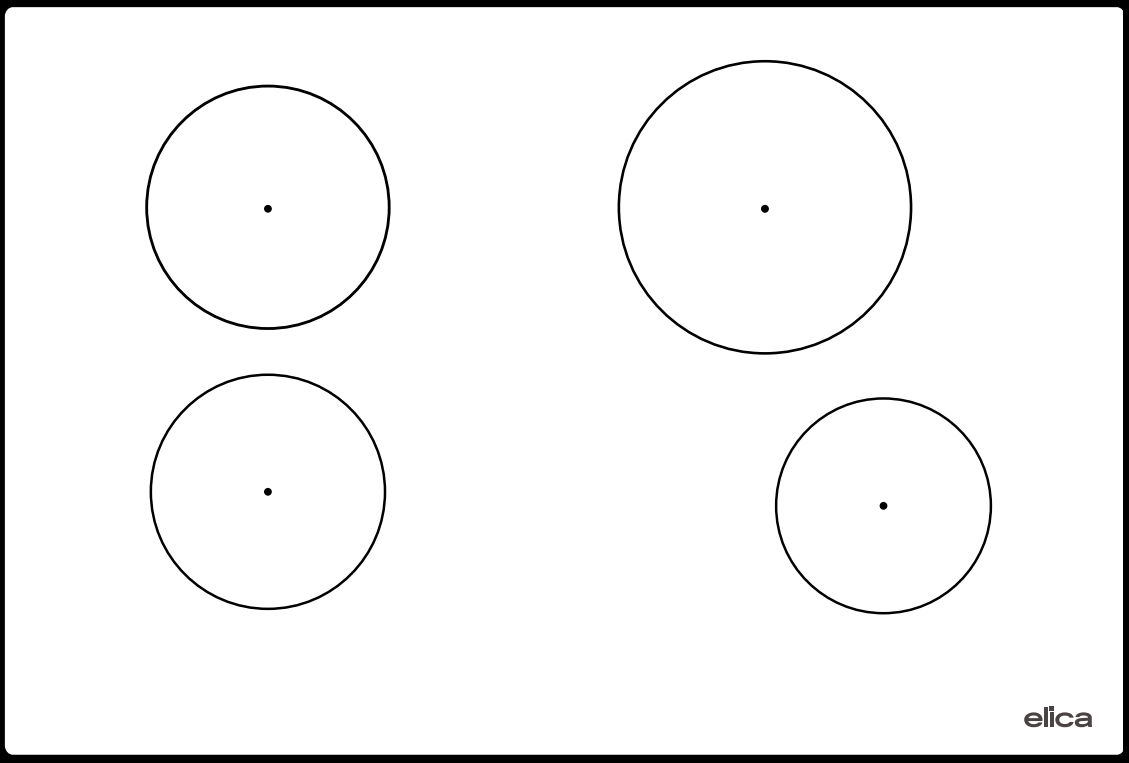

elica
7 Years Premium Warranty

Electronic and mechanical components.
Registration within 90 days of purchase at elica.com (see p. 376).

5.2 Primis

Available in different sizes, practical and intuitive. These hobs have a touch slider to easily control them with a simple tap and manage power intelligently for excellent performance.

All it takes is a touch.

The touch slider allows you to operate controls and features quickly. Even the booster can be activated with a simple gesture.

Smart power management.

High cooking performance, even at limited power. Water reaches boiling point quickly, while stable power management delivers excellent results.



Various dimensions.

Primis hobs come in different sizes: from the compact and combinable domino, to the standard 60 cm (with or without bridge zone), to the ergonomic 80 cm model.

Distinctive style.

The Primis induction hob range features an elegant screen-print design characterised by dual-colour circles between the centre and the outlines, creating a refined and harmonious look.

Primis 804 Plus



- GREEN INDUCTION
- ERGONOMIC COOKING LAYOUT
- RAW FINISHING

TECHNICAL SPECIFICATIONS
78×52 cm
75×49 cm (cut)
Black glass, Matt black glass

FEATURES

Bridge Zone
Stop&Go
Warming Mode
Timer
Child Lock

COOKING	
Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	2,8 kW - 3,5 kW - 6,0 kW
Voltage	220-240V / 380-415V 2N
Cooking zones	1 Ø180 mm - 1,5/2,0 kW 2 Ø180 mm - 1,5/2,0 kW 3 Ø210 mm - 1,5/2,0 kW 4 Ø160 mm - 1,2/1,6 kW
Bridge Zone	1 left

MODELS	
PRIMIS 804 PLUS BL	PRF0199862
PRIMIS 804 PLUS RAW	PRF0210632



↑ Primis 804 Plus RAW

Primis 604 Plus



- **GREEN INDUCTION**
- **RAW FINISHING**

TECHNICAL SPECIFICATIONS
59×52 cm
56×48 cm (cut)
Black glass, Matt black glass

FEATURES

Bridge Zone
Stop&Go
Warming Mode
Timer
Child Lock

COOKING	
Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	2,8 kW - 3,5 kW - 6,0 kW
Voltage	220-240V / 380-415V 2N
Cooking zones	1 Ø180 mm - 1,5/2,0 kW 2 Ø180 mm - 1,5/2,0 kW 3 Ø210 mm - 1,5/2,0 kW 4 Ø160 mm - 1,2/1,6 kW
Bridge Zone	1 left

MODELS	
PRIMIS 604 PLUS BL	PRF0199861
PRIMIS 604 PLUS RAW	PRF0210631

Primis 603



- GREEN INDUCTION
- EXTRA LARGE ZONE
- FAST BOILING
- RAW FINISHING

TECHNICAL SPECIFICATIONS	
59×52 cm	
56×48 cm (cut)	
Black glass, Matt black glass	

FEATURES

- Dual Zone
- Stop&Go
- Warming Mode
- Timer
- Child Lock

COOKING	
Controls	Touch Control Slider 9P+B
Absorption	7,2 kW
Power limitation	2,8 kW - 3,5 kW - 6,0 kW
Voltage	220-240V / 380-415V 2N
Cooking zones	1 Ø280-190 mm - 2,7/3,6 - 1,5/1,8 kW 2 Ø180 mm - 1,5/2,0 kW 3 Ø160 mm - 1,2/1,6 kW

MODELS	
PRIMIS 603 BL	PRF0199860
PRIMIS 603 RAW	PRF0210630

Primis 302



- GREEN INDUCTION

TECHNICAL SPECIFICATIONS	
29×52 cm	
27×49 cm (cut)	
Black glass	

FEATURES


- Warming Mode
- Timer
- Stop&Go


COOKING	
Controls	Touch Control Direct Slider 9P+B
Absorption	3,6 kW
Power limitation	2,8 kW
Voltage	220-240V
Cooking zones	1 Ø210 mm - 1,5/2 kW 2 Ø160 mm - 1,2/1,6 kW

MODELS	
PRIMIS 302 BL	PRF0199858


Technical drawings


Ratio Connex 905 Plus

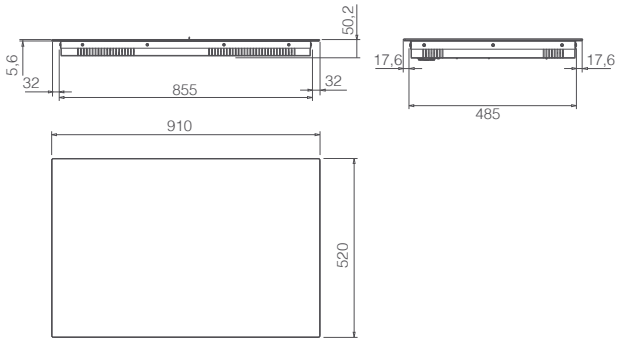

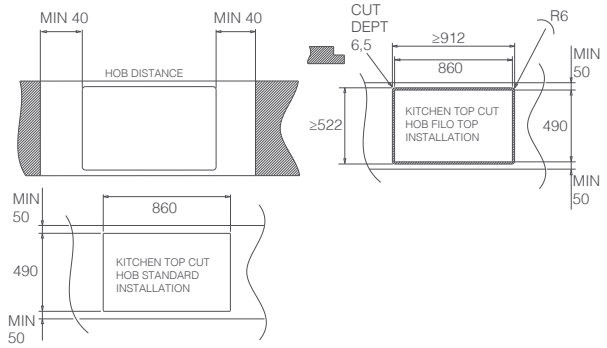



Ratio Connex 804 Plus / Ratio Connex 803 Plus

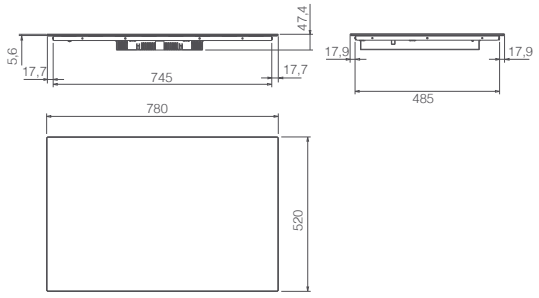

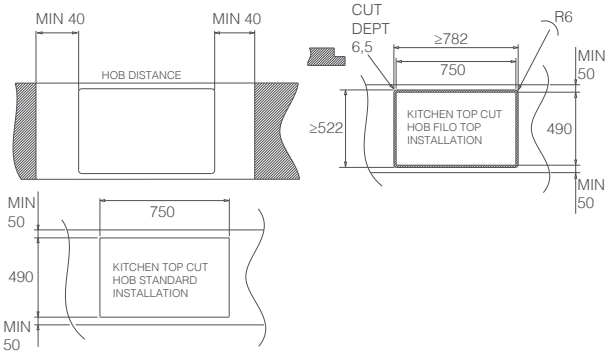



Ratio Connex 604 Plus / Ratio Connex 603 Plus

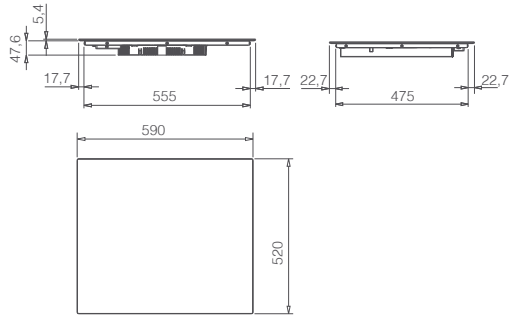

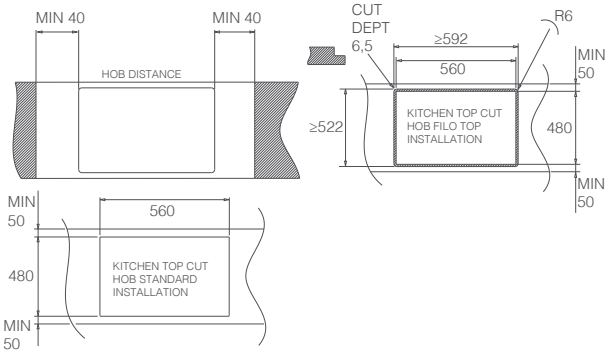



Ratio Connex 302 Plus

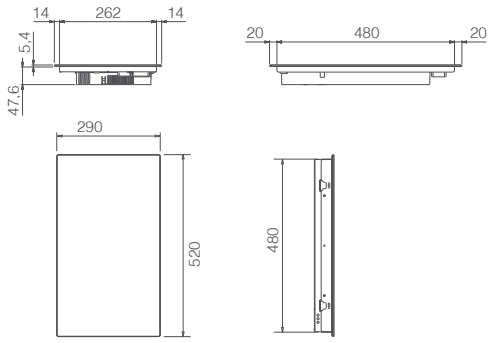

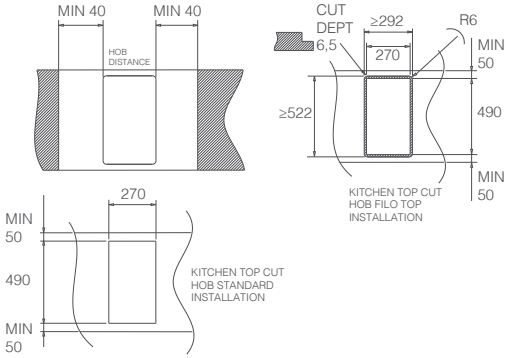



Primis 804 Plus

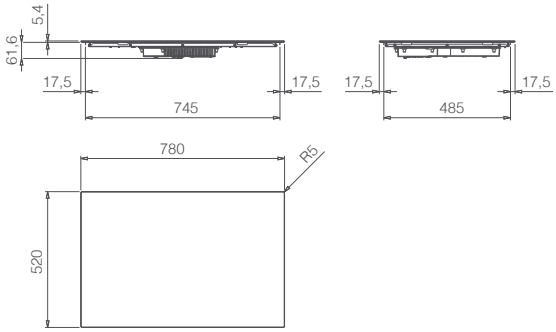

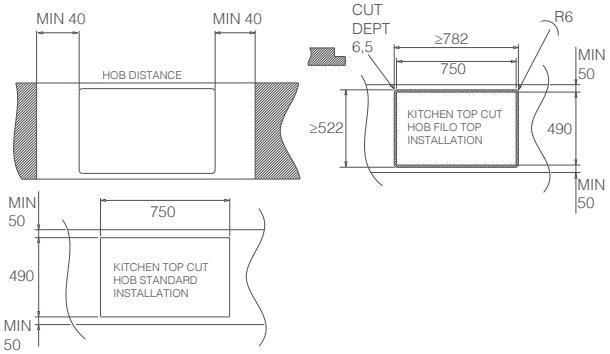



Primis 604 Plus / Primis 603

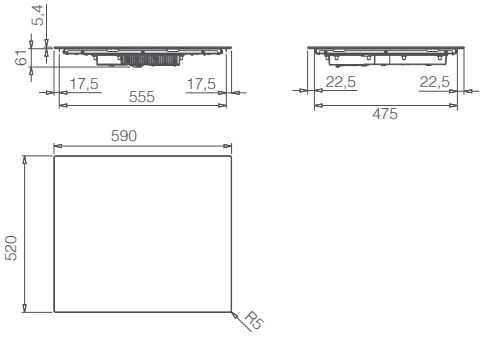

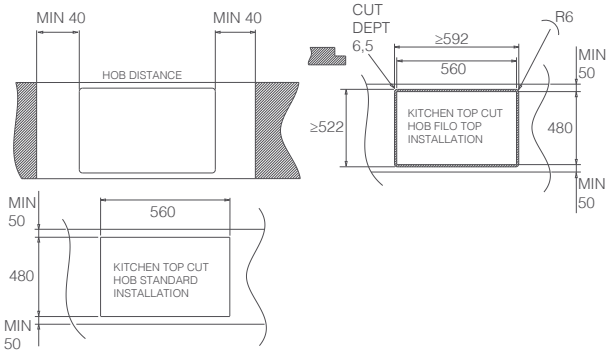

Primis 302

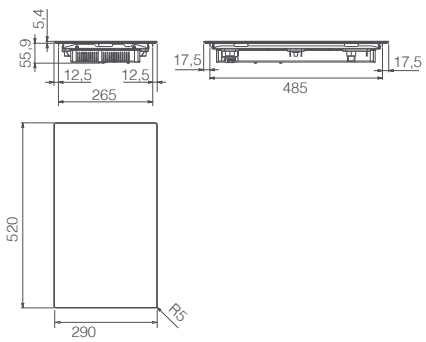

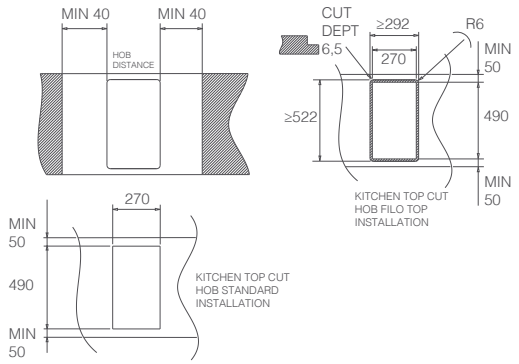


Comparative table Induction Hobs

MODEL	RATIO CONNEX 905 PLUS	RATIO CONNEX 804 PLUS	RATIO CONNEX 803 PLUS	RATIO CONNEX 604 PLUS	RATIO CONNEX 603 PLUS	RATIO CONNEX 302 PLUS
SIZE (CM)	91×52	78×52	78×52	59×52	59×52	29×52
CUT SIZE (CM)	86×49	75×49	75×49	56×48	56×48	27×49
FINISHING	Black glass / Matt black glass - RAW	Black glass / Matt black glass - RAW	Black glass	Black glass	Black glass / Matt black glass - RAW	Black glass
CONTROLS	Touch Control Slider 9P+B	Touch Control Slider 9P+B	Touch Control Slider 9P+B	Touch Control Slider 9P+B	Touch Control Slider 9P+B	Touch Control Slider 9P+B
NUMBER OF HOB ZONES	5	4	3	4	3	2
MAX. POWER OF COOKING ZONES	2,5 / 3,6 kW	2,1 / 3 kW	2,5 / 3,6 kW	2,1 / 3 kW	2,5 / 3,6 kW	2,1 / 3,0 kW
POWER LIMITATION (KW)	3,1 / 4,5 / 7,2	3,1 / 4,5	3,1 / 4,5	3,1 / 4,5	3,1 / 4,5	3,1
TOTAL ABSORPTION (W)	10,8 kW	7,2 kW	7,2 kW	7,2 kW	7,2 kW	3,6 kW
RAW FINISHING	■	■	–	■	■	–
MULTI CONNECTION	■	■	■	■	■	■
GREEN INDUCTION	–	–	–	–	–	–
EXTRALARGE ZONE	■	–	■	–	■	–
FAST BOILING	■	–	■	–	■	–
ERGONOMIC COOKING LAYOUT	–	■	–	–	–	–
DIRECT INTERACTION	–	–	–	–	–	–
BRIDGE ZONE (NO.)	2	1	1	1	1	1
DUAL ZONE	■	–	■	–	■	–
MELTING	–	–	–	–	–	–
WARMING	■	■	■	■	■	■
SIMMERING	–	–	–	–	–	–
POT SELF DETECTION	–	–	–	–	–	–
CHILD LOCK	■	■	■	■	■	■
STOP&GO	■	■	■	■	■	■
RECALL	–	–	–	–	–	–
TIMER	■	■	■	■	■	■

PRIMIS 804 PLUS	PRIMIS 604 PLUS	PRIMIS 603	PRIMIS 302
78×52	59×52	59×52	29×52
75×49	56×48	56×48	27×49
Black glass / Matt black glass - RAW	Black glass / Matt black glass - RAW	Black glass / Matt black glass - RAW	Black glass
Touch Control Slider 9P+B	Touch Control Slider 9P+B	Touch Control Slider 9P+B	Direct Slider Touch Control 9P+B
4	4	3	2
1,5 / 2,0 kW	1,5 / 2,0 kW	2,7 / 3,6 kW	1,5 / 2,0 kW
2,8 / 3,5 / 6	2,8 / 3,5 / 6	2,8 / 3,5 / 6	2,8
7,2 kW	7,2 kW	7,2 kW	3,6 kW
■	■	■	–
–	–	–	–
■	■	■	■
–	–	■	–
–	–	■	–
■	–	–	–
–	–	–	–
1	1	–	–
–	–	■	–
–	–	–	–
■	■	■	■
–	–	–	–
–	–	–	–
■	■	■	■
■	■	■	■
–	–	–	–
■	■	■	■

Hoods

Duct-out or filtering hoods? Island, downdraft, suspended or built-in hoods? Wall-mounted or ceiling hoods? The answer is an Elica kitchen hood, with a versatile design for both traditional and modern kitchen styles.

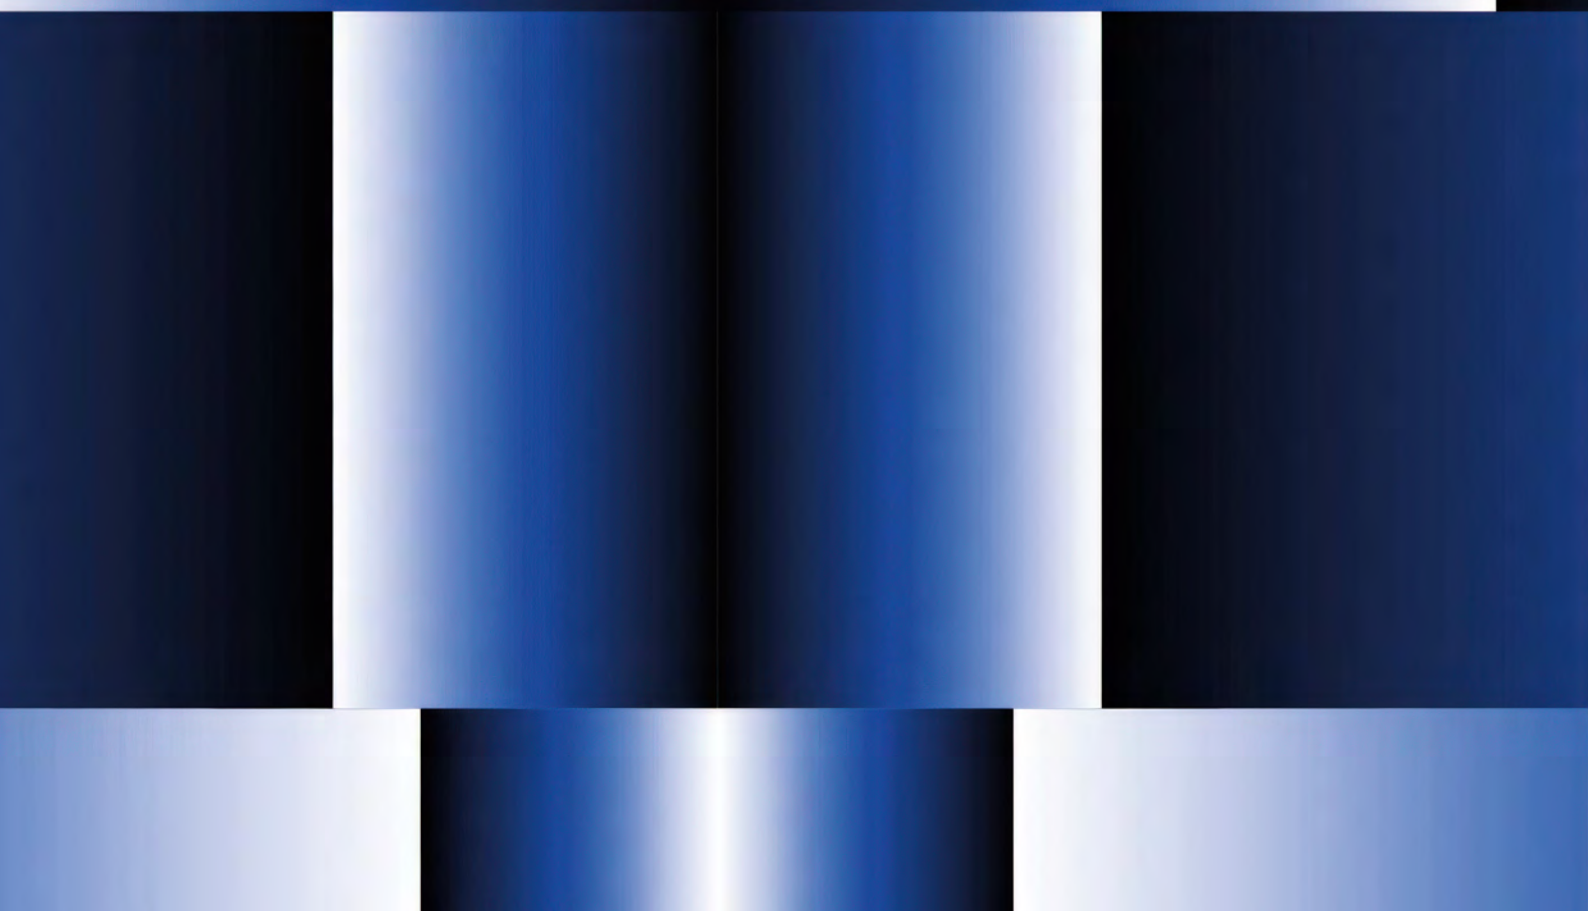

6

6.1 Special Selection

Extractor hoods with an exclusive design and a distinctive character, featuring innovative features.

6.2 Wall-mounted

This is a good solution when the kitchen is against a wall, with the hob near the wall.

6.3 Island

This is a good solution when the kitchen is in the centre of the room, with the hob away from the wall.

6.4 Ceiling

This is a good solution when the kitchen is either in the centre of the room or against a wall. The hood also turns into a lamp and is installed in the false ceiling.

6.5 Suspended

This is the solution for those seeking a chandelier-style hood, to be installed in the ceiling.

6.6 Downdraft

This is a good solution when the hob is far from the wall, in a kitchen peninsula or island unit. It is installed directly into the countertop.


6.7 Built-in without cabinet base

This built-in hood, designed to blend into the kitchen, replaces the bottom panel of the cabinet and offers protection for wall units.

6.8 Built-in with cabinet base

This type of hood is concealed inside a cabinet.

Hoods



6.1 Special Selection

Hoods with a unique and distinctive design, offering endless possibilities in terms of aesthetics, functionality and installation. Designs created to bring personality to the kitchen and enhance any cooking space.

TheKub.
Synthesis and modularity.







Modular Design

Many configurations: wall-mounted, suspended, island; available in steel, white and matt black, enhanced with dedicated accessories, including a wooden shelf, creating more configuration possibilities.

Comfort Silence

Thanks to the Brushless motor, suction power combines with high acoustic comfort, so you can talk and cook in peace.

Wide Dimming Light

Full LED lighting distributed evenly that can be adjusted in intensity: at maximum for a very bright environment, softer to create a more relaxed atmosphere.

Connex™

TheKub can be fully controlled remotely via the Elica app or voice assistants, and can interact with induction hobs adjusting the extraction intensity automatically based on the active cooking zones.

TheKub Wall

Design Fabrizio Crisà



- **CONNEX**
- **COMFORT SILENCE**
- **MODULAR DESIGN**
- **WIDE DIMMING LIGHT**
- **BLACK MATT**

3 PRODUCT DESIGN AWARDS WINNER

Pag. 16


TECHNICAL SPECIFICATIONS

32 cm	
Duct-out	
Stainless steel, Matt black, White	
▪ 9-layer aluminium grease filter included	

FEATURES

- Brushless
- Delay Switch Off
- Maintenance Alarm
- Dim Light

DIMENSIONAL DRAWING

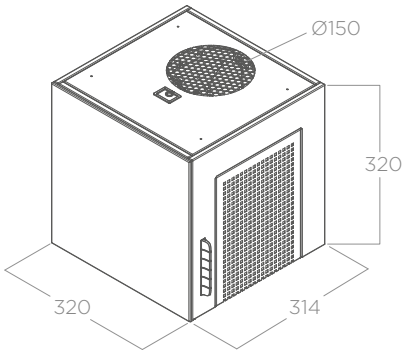

MIN DISTANCE FROM HOB

Gas	65
Induction/Radiant	50

LIGHTING

Type	Led 7 W
Intensity	450 LUX
Temperature	3000 K

PERFORMANCE

Controls	3S+B Electronic Push Button
Booster airflow	710 m^3/h
Noise level min-max	41-59 dB(A)
Total absorption	177 W
Energy class	A+

ACCESSORIES

Regenerable charcoal filter	KIT0216649
Shelf 90cm IX	KIT0214984
Shelf 90cm wood	KIT0214986
Shelf 90cm Matt black	KIT0214985
Shelf 90cm White	KIT0214987
Chimney kit stainless steel	KIT0214992
Matt black chimney kit	KIT0214993
White chimney kit	KIT0214994

MODELS

THEKUB @ IX/A/32	PRF0214975
THEKUB @ BL MAT/A/32	PRF0214976
THEKUB @ WH/A/32	PRF0214977

TheKub Island

Design Fabrizio Crisà



- **CONNEX**
- **COMFORT SILENCE**
- **MODULAR DESIGN**
- **WIDE DIMMING LIGHT**
- **BLACK MATT**

3 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

32 × 32 cm	
Duct-out	
Stainless steel, Matt black, White	
▪ 9-layer aluminium grease filter included	


MIN DISTANCE FROM HOB

Gas	65
Induction/Radiant	50

FEATURES

- Brushless
- Delay Switch Off
- Maintenance Alarm
- Dim Light

DIMENSIONAL DRAWING

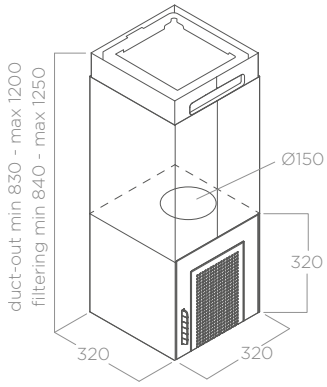

LIGHTING

Type	Led 7 W
Intensity	450 LUX
Temperature	3000 K

PERFORMANCE

Controls	3S+B Electronic Push Button
Booster airflow	710 m^3/h
Noise level min-max	41-59 dB(A)
Total absorption	177 W
Energy class	A+

ACCESSORIES

Regenerable charcoal filter	KIT0216649
Shelf cm 120 IX	KIT0214988
Shelf cm 120 Wood	KIT0214989
Shelf cm 120 Matt black	KIT0214990
Shelf cm 120 White	KIT0214991

MODELS

THEKUB ISL @ IX/A/32	PRF0214978
THEKUB ISL @ BL MAT/A/32	PRF0214979
THEKUB ISL @ WH/A/32	PRF0214980

TheKub Suspended

Design Fabrizio Crisà



- **CONNEX**
- **COMFORT SILENCE**
- **MODULAR DESIGN**
- **WIDE DIMMING LIGHT**
- **BLACK MATT**

3 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

32 × 32 cm	
Filtering	
Stainless steel, Matt black, White	
▪ 9-layer aluminium grease filter included ▪ Regenerable charcoal filter included	


MIN DISTANCE FROM HOB

Gas	65
Induction/Radiant	50

FEATURES

- Brushless
- Delay Switch Off
- Maintenance Alarm
- Dim Light

DIMENSIONAL DRAWING

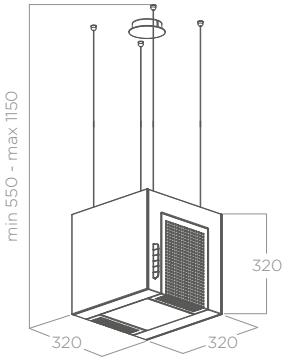

LIGHTING

Type	Led 7 W
Intensity	450 LUX
Temperature	3000 K

PERFORMANCE

Controls	3S+B Electronic Push Button
Booster airflow	710 m^3/h
Noise level min-max	41-59 dB(A)
Total absorption	177 W
Energy class	A+

ACCESSORIES

Regenerable charcoal filter	KIT0216649
Shelf cm 120 IX	KIT0214988
Shelf cm 120 Wood	KIT0214989
Shelf cm 120 Matt black	KIT0214990
Shelf cm 120 White	KIT0214991
Extension cable kit (2,5m)	KIT0147941
Extension cable kit (5m)	KIT0147942

MODELS

THEKUB SUSPENDED @ IX/F/32	PRF0214981
THEKUB SUSPENDED @ BL MAT/F/32	PRF0214982
THEKUB SUSPENDED @ WH/F/32	PRF0214983







↑ TheKub Wall Black Matt
← TheKub Suspended White

Open Suite Superior

Design Fabrizio Crisà



- **BLACK MATT**
- **CONNEX**
- **MODULAR DESIGN**
- **LIGHTING EXPERIENCE**

12 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

80×424 - 160×424 cm

Filtering

Matt black

- Aluminium grease filter included
- Regenerable charcoal filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	55 cm

FEATURES

- Regenerable filter
- Dim Light
- Tune White
- Maintenance Alarm

DIMENSIONAL DRAWING

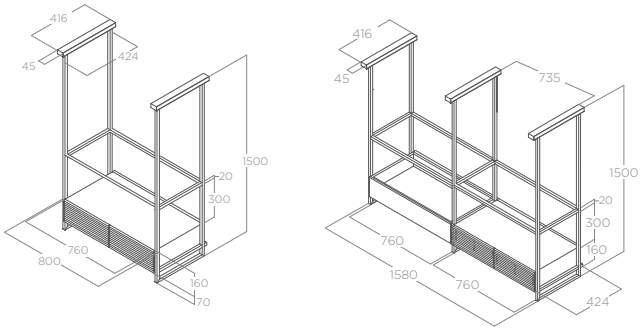

LIGHTING

Type	Led Panel 1×21W (80cm) - 2×21W (160cm)
Intensity	758 LUX (80cm) - 844 LUX (160cm)
Temperature	2700K - 5200K

PERFORMANCE

Controls	3S+2B Electronic Push Button
Booster airflow	500 m³/h
Noise level min-max	63-69 dB(A)
Total absorption	261 W (80cm) - 282 W (160cm)

MODELS

OPEN SUITE SUP @ BLMAT/F/80	PRF0165965B
OPEN SUITE SUP @ BLMAT/F/160	PRF0166771B

Model not subject to compulsory energy certification.

ACCESSORIES

Regenerable charcoal filter (2 pcs)	KIT0166765
Extraction module kit Superior	KIT0167079A
Full LED module kit Superior	KIT0166961A
Extra-clear glass shelf kit	KIT0166455
Smoked glass shelf kit	KIT0166463
Black metal shelf kit	KIT0166470
Wire mesh shelf kit	KIT0166472
Wooden shelf kit	KIT0166475
Trellis expansion kit Superior	KIT0166962
Shelf frame kit	KIT0166768





Open Suite Superior. Accessories and installation.

Buy on Elica Shop

Elica offers a complete range of structural and aesthetic accessories designed to harmoniously integrate the hood into any kitchen space. The accessories, sold separately, can be combined with each other to create different configurations. Starting from the two basic versions available in the catalogue, it is possible to design customised solutions, adapting them to the architecture of the space, the style of the kitchen and specific design requirements.

Open Suite Superior - Island



PRF0165965B
OPEN SUITE SUPERIOR BL/F/80

1 Hood module
1 shelf in clear glass (80cm)



PRF0166771B
OPEN SUITE SUPERIOR BL/F/160

1 hood module
1 light module
2 shelves in clear glass(160cm)








Decorative shelves


KIT0166455
Extra-clear glass shelf kit




KIT0166463
Smoked glass shelf kit



KIT0166470
Black metal shelf kit





KIT0166472
Wire mesh shelf kit



KIT0166475
Wooden shelf kit






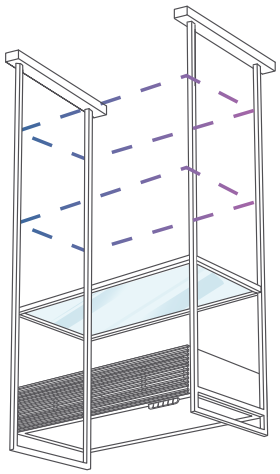

Starting from the two standard versions, you can also personalise the height of Open Suite by adding or replacing shelves. (maximum 3 shelves)


Additional modules and structural accessories

You can also personalise the width of Open Suite by adding hood units, lighting modules, or shelves.

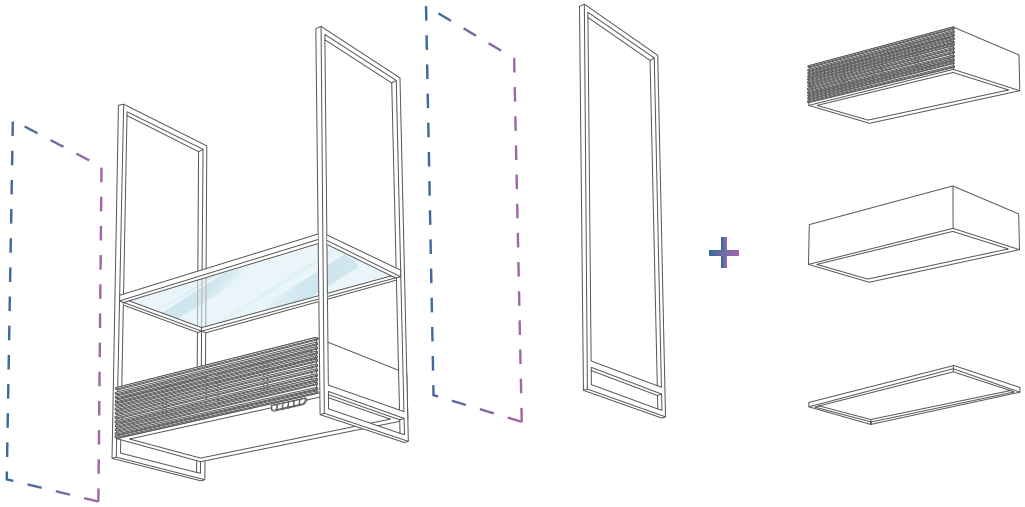


KIT0167079A
Extraction module kit Superior






KIT0166961A
Full LED module kit Superior






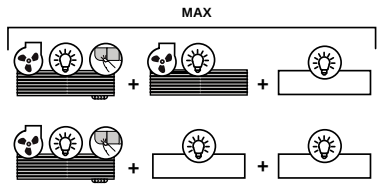

You can electrically connect up to 3 modules together, according to the type and order described in the diagram shown here. You can add unlimited shelves in various materials, colours, and finishes.


KIT0166962
Trellis expansion kit Superior





KIT0166768
Shelf frame kit





Open Suite

Design Fabrizio Crisà



- **BLACK MATT**
- **CONNEX**
- **MODULAR DESIGN**
- **LIGHTING EXPERIENCE**

12 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

80 - 160 cm	
Filtering	
Matt black	

- Aluminium grease filter included
- Regenerable charcoal filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	55 cm

FEATURES

- Regenerable filter
- Dim Light
- Tune White
- Maintenance Alarm

DIMENSIONAL DRAWING

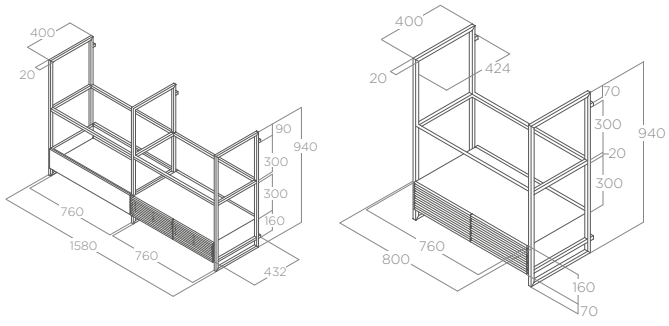

LIGHTING

Type	Led Panel 1×21W (80cm) - 2×21W (160cm)
Intensity	758 LUX (80cm) - 844 LUX (160cm)
Temperature	2700K - 5200K

PERFORMANCE

Controls	3S+2B Electronic Push Button
Booster airflow	500 m^3/h
Noise level min-max	63-69 dB(A)
Total absorption	261 W (80cm) - 282 W (160cm)

MODELS

OPEN SUITE @ BLMAT/F/80	PRF0166703B
OPEN SUITE @ BLMAT/F/160	PRF0167007B

Model not subject to compulsory energy certification.

ACCESSORIES

Regenerable charcoal filter (2 pcs)	KIT0166765
Full LED module kit	KIT0167073A
Extraction module kit	KIT0166964A
Extra-clear glass shelf kit	KIT0166455
Smoked glass shelf kit	KIT0166463
Black metal shelf kit	KIT0166470
Wire mesh shelf kit	KIT0166472
Wooden shelf kit	KIT0166475
Trellis expansion kit	KIT0166963
Shelf frame kit	KIT0166768

Open Suite. Accessories and installation.

Buy on
Elica Shop

Elica offers a complete range of structural and aesthetic accessories designed to harmoniously integrate the hood into any kitchen space. The accessories, sold separately, can be combined with each other to create different configurations. Starting from the two basic versions available in the catalogue, it is possible to design customised solutions, adapting them to the architecture of the space, the style of the kitchen and specific design requirements.

Open Suite - Wall-mounted



PRF0166703B
OPEN SUITE BL/F/80

1 Hood module
1 shelf in clear glass (80cm)



PRF0167007B
OPEN SUITE BL/F/160

1 hood module
1 light module
2 shelves in clear glass(160cm)








Decorative shelves


KIT0166455
Extra-clear glass shelf kit




KIT0166463
Smoked glass shelf kit



KIT0166470
Black metal shelf kit





KIT0166472
Wire mesh shelf kit



KIT0166475
Wooden shelf kit






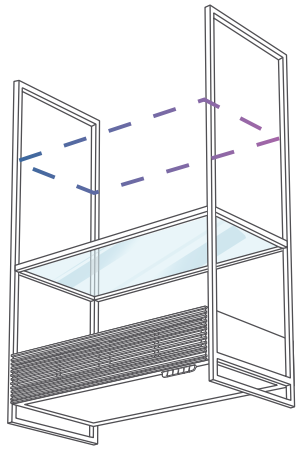

Starting from the two standard versions, you can also personalise the height of Open Suite by adding or replacing shelves. (maximum 2 shelves)


Additional modules and structural accessories

You can also personalise the width of Open Suite by adding hood units, lighting modules, or shelves.

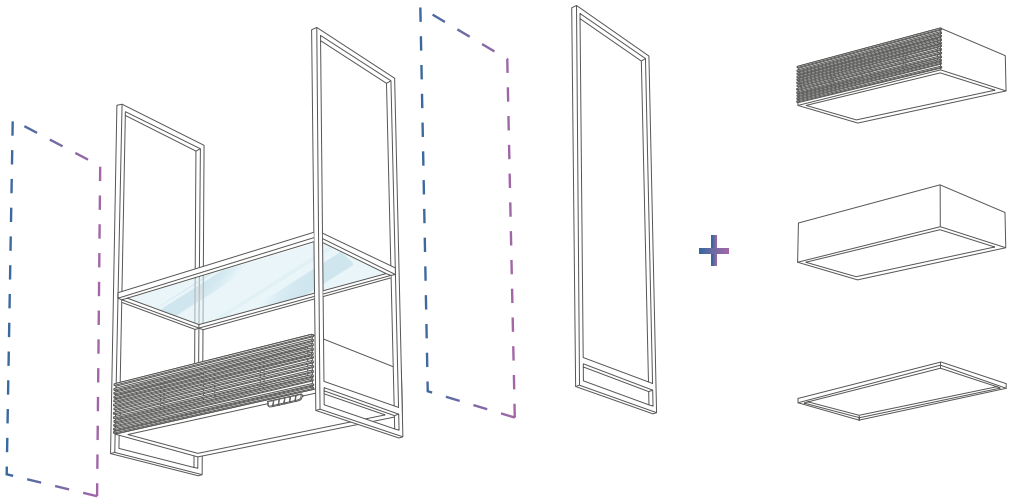


KIT0167073A
Full LED module kit






KIT0166964A
Full LED module kit Superior






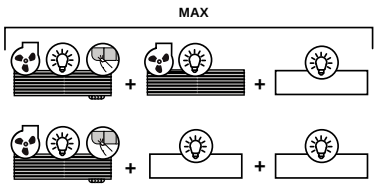

You can electrically connect up to 3 modules together, according to the type and order described in the diagram shown here. You can add unlimited shelves in various materials, colours, and finishes.


KIT0166963
Trellis expansion kit





KIT0166768
Shelf frame kit





Air treated efficiently.
The 2-in-1 kitchen hood and air purifier.

Introducing Ikona Maxxi Pure, a multifunctional hood designed by Elica to help improve air quality thanks to the innovative Combo Pure Filter: a combination of HEPA filter and activated charcoal, designed to trap particles such as dust, pollen and pet hair, while also helping to reduce odours.





Elica Air Pure.

Air quality is a highly topical issue. It impacts the environment we live in, including our homes. Proper ventilation, regular air changes, and an effective system for extracting kitchen fumes and vapours are essential for improving air quality in our everyday living spaces.
Elica has designed solutions able to elevate the design of every kitchen while providing extraction systems that are easy to use and technologically advanced.

Ikona Maxxi Pure

Design Fabrizio Crisà



- **BLACK MATT**
- **COMFORT SILENCE**
- **TOTAL AIR CLEANING**

9 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

120×44 cm

Filtering, convertible to ducting-out

Stainless steel, matt black


- Aluminium grease filter included
- Regenerable charcoal filter included
- Hepa-Charchoal filter included

FEATURES

Delay Switch Off

Maintenance Alarm

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm	Induction/Radiant	50 cm

EXTRACTION PERFORMANCE (MOTOR 1)

Controls	3S+B Capacitive touch control
Booster airflow	600 m^3/h
Noise level min-max	47-62 dB(A)
Total absorption	207 W
Energy class	A

PURIFICATION PERFORMANCE (MOTOR 2)

Controls	Capacitive touch control 2S
For room up to	30 m^2
Noise level min-max	37-66 dB(A)
Total absorption	175 W
Energy class	A
Filtered particles	Dust/dust mites, animal dander, pollens, molds, cigarettes smoke, stoves combustibles, formaldehyde (paintings and coating), cooking odors.

LIGHTING

Type	Strip Led 1×7 W
Intensity	365 LUX
Temperature	3500 K

ACCESSORIES

Regenerable charcoal filter	CFC0162221
Hepa-Charcoal filter	KIT0176157
Black chimney kit	KIT0175017
Stainless steel chimney kit	KIT0175018
Stainless steel wall installation kit	KIT0175807
Black wall installation kit	KIT0175808
Extension cable kit (5m)	KIT0147942
Extension cable kit (2,5m)	KIT0147941

MODELS

IKONA MAXXI PURE IX/F/120	PRF0171196
IKONA MAXXI PURE BL MAT/F/120	PRF0171195





Ikona Maxxi Pure stainless steel - filtering ↑
Ikona Maxxi Pure matt black - duct-out →



Ikona

Design Fabrizio Crisà



■ **BLACK MATT**

TECHNICAL SPECIFICATIONS

60×44 cm	
Duct-out	
Matt black	
▪ Aluminium grease filter included	


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

Maintenance Alarm

DIMENSIONAL DRAWING

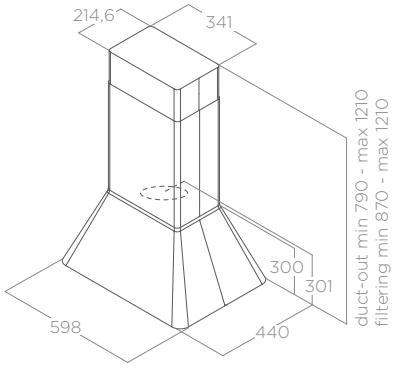

LIGHTING

Type	Strip Led 1×7 W
Intensity	365 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	605 m^3/h
Noise level min-max	47-67 dB(A)
Total absorption	207 W
Energy class	A

MODELS

IKONA BL MAT/A/60	PRF0164784

Ikona Light

Design Fabrizio Crisà



■ **BLACK MATT**

TECHNICAL SPECIFICATIONS

60×44 cm	
Filtering	
Stainless steel, matt black, matt white	

- Aluminium grease filter included
- Regenerable charcoal filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

Maintenance Alarm

DIMENSIONAL DRAWING

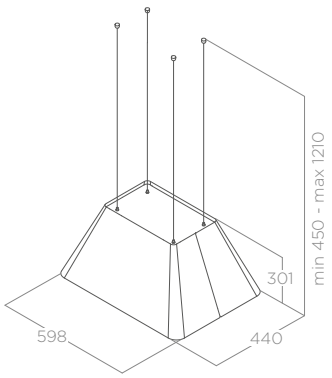

LIGHTING

Type	Strip Led 1×7 W
Intensity	365 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	605 m³/h
Noise level min-max	47-67 dB(A)
Total absorption	207 W
Energy class	A

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Black wall installation kit	KIT0175808
Stainless steel installation kit	KIT0175807
Extension cable kit (2,5m)	KIT0147941
Extension cable kit (5m)	KIT0147942

MODELS

IKONA LIGHT WH/F/60	PRF0165083
IKONA LIGHT IX/F/60	PRF0165071
IKONA LIGHT BL MAT/F/60	PRF0165082

Nuage

Design Fabrizio Crisà



■ **TOTAL INTEGRATION**

6 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

75 cm

Filtering, convertible to ducting-out

Stainless steel coverable with drywall (not included),
Stainless steel + paintable white

- Aluminium grease filter included
- Regenerable charcoal filter included

MIN DISTANCE FROM HOB


Gas	65 cm
Induction/Radiant	50 cm

FEATURES

Maintenance Alarm

Back Aspiration

DIMENSIONAL DRAWING

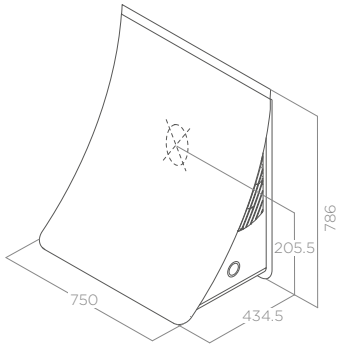

LIGHTING

Type	Strip Led 1×7 W
Intensity	141 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE


Controls	3S+B Electronic rotative
Booster airflow	580 m^3/h
Noise level min-max	49-62 dB(A)
Total absorption	227 W
Energy class	A

MODELS


NUAGE PAINTABLE/F/75	PRF0098374
NUAGE DRYWALL/F/75	PRF0096484

Technical drawings


Nuage

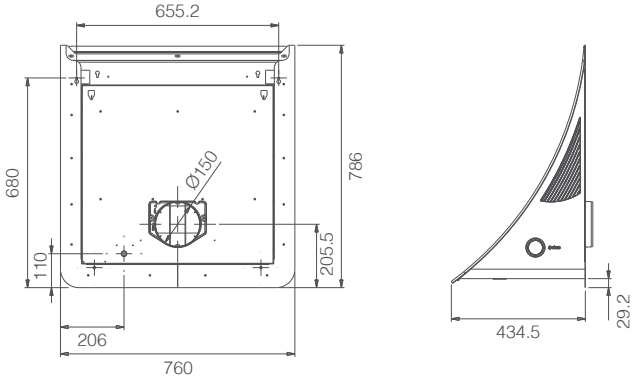


Ikona

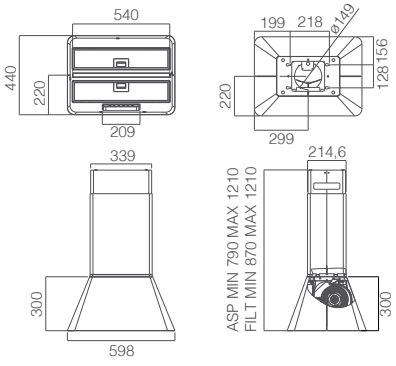


Ikona Light

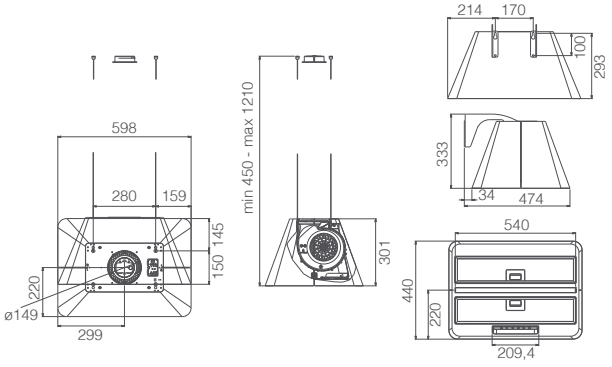


Ikona Maxxi Pure

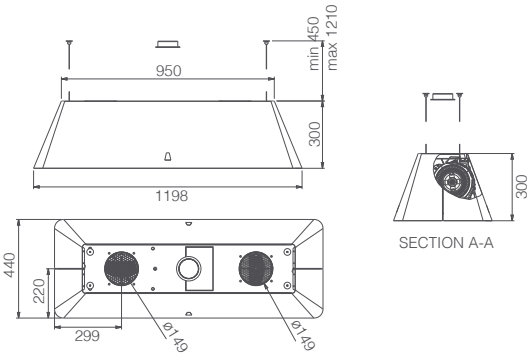


Open Suite

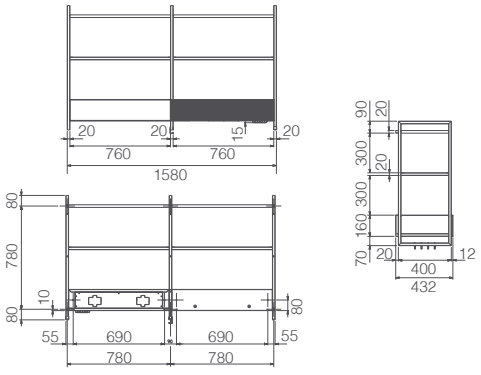


Open Suite Superior

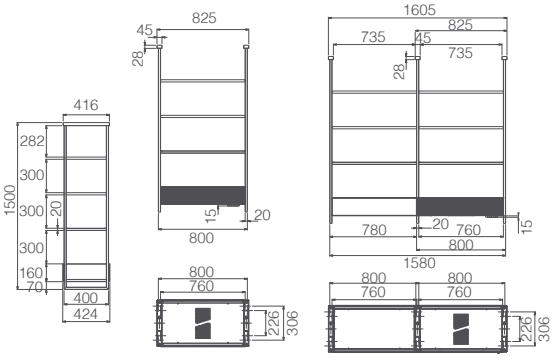


TheKub Wall

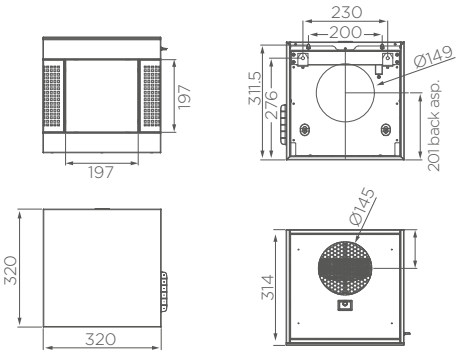

TheKub Island

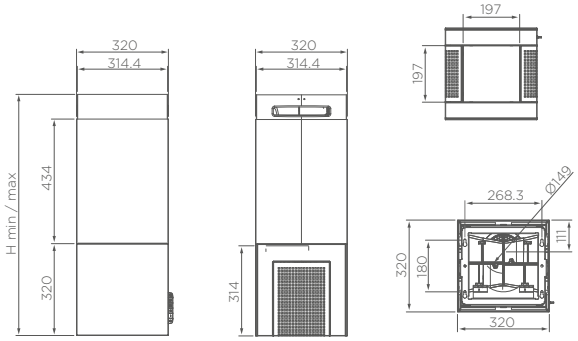

TheKub Suspended

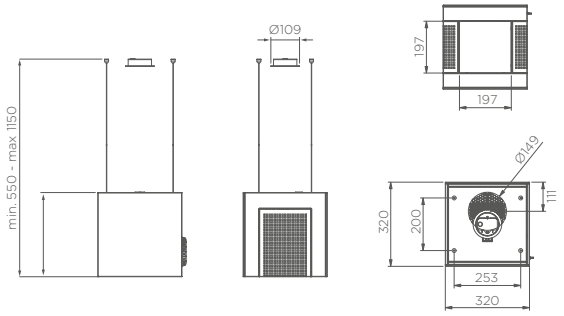


Accessories

Buy on
Elica Shop

Chimney kit Ikona Maxxi Pure


KIT0175017
Black chimney kit





KIT0175018
Stainless steel
chimney kit






Chimney kit TheKub Wall


KIT0214992
Stainless steel
chimney kit






KIT0214993
Matt black chimney kit





KIT0214994
White chimney kit






Decorative shelves TheKub Wall


KIT0214984
Shelf cm 90 Stainless steel







KIT0214986
Shelf cm 90 Wood






KIT0214985
Shelf cm 90 Matt black





KIT0214987
Shelf cm 90 White






Decorative shelves TheKub Island/ TheKub Suspended


KIT0214988
Shelf cm 120 Stainless steel






KIT0214989
Shelf cm 120 Wood






KIT0214990
Shelf cm 120 Matt black






KIT0214991
Shelf cm 120 White






Hoods

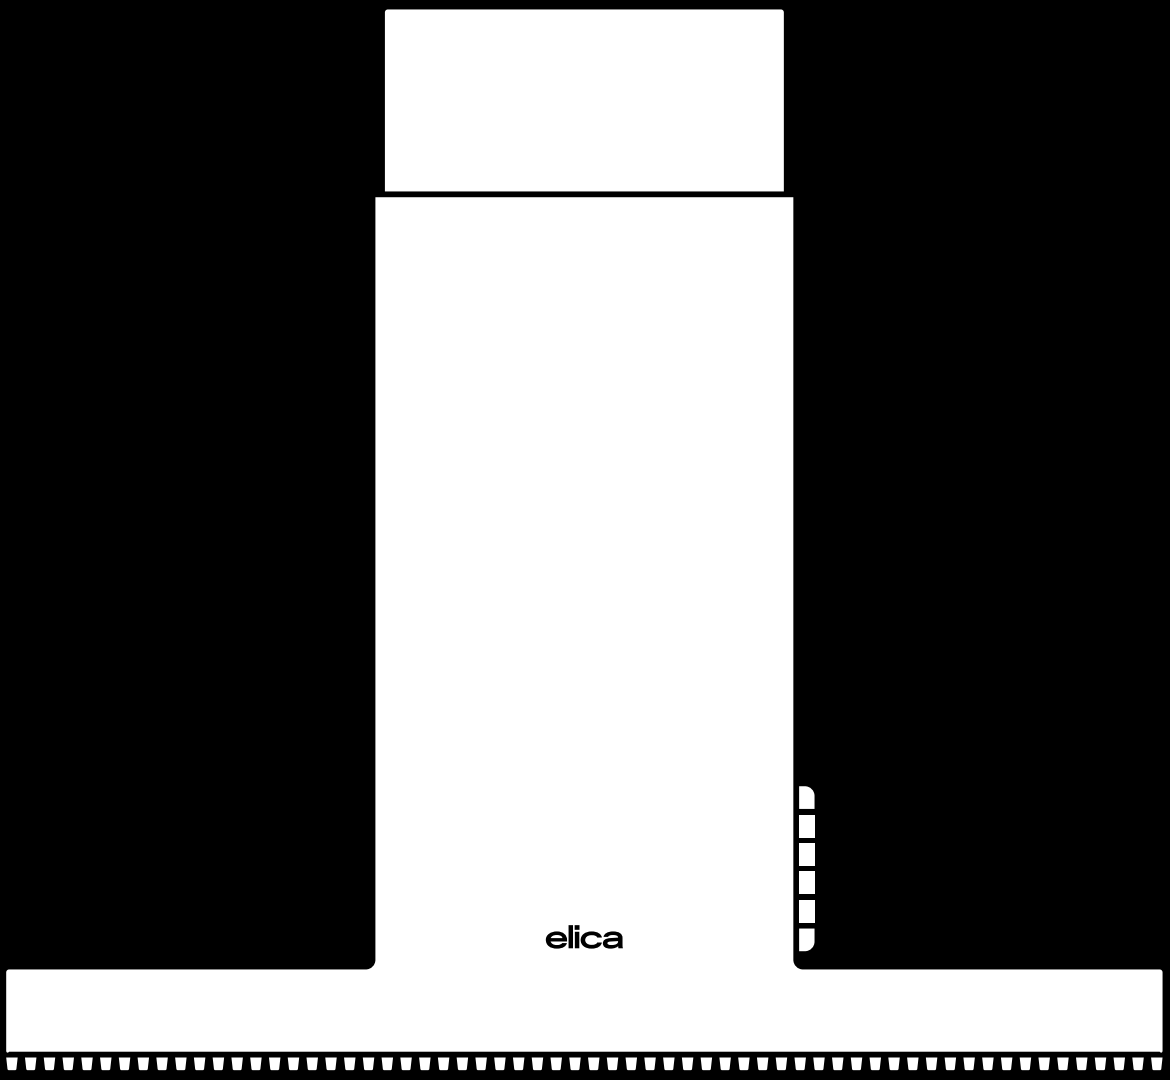

6.2 Wall-mounted

If you are looking for a wall-mounted hood, you are in the right place. And what's more, they can also work without a chimney, and without exhausting fumes to the outside: they capture vapours and odours, putting filtered air back into the room.

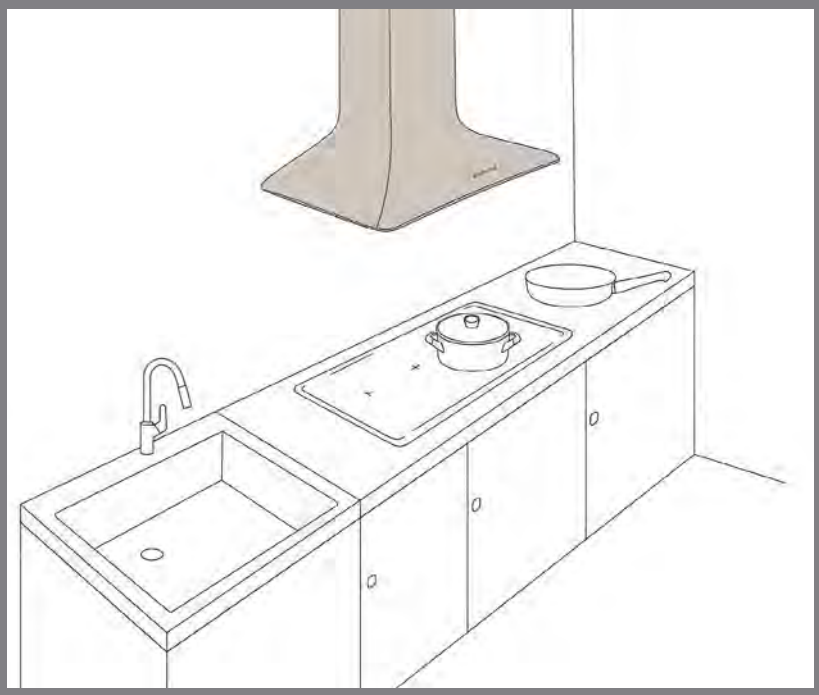

This is a good solution when the kitchen is against a wall, with the hob near the wall.

Om Air



- **CONNEX**
- **COMFORT SILENCE**

1 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

75 cm

Filtering, convertible to ducting-out

Black glass, White glass

- Aluminium grease filter included
- Regenerable charcoal filter included


MIN DISTANCE FROM HOB

Gas	55 cm
Induction/Radiant	40 cm

FEATURES

- Perimeter Aspiration
- Dim Light
- Regenerable filter
- Clean Mode
- Brushless
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

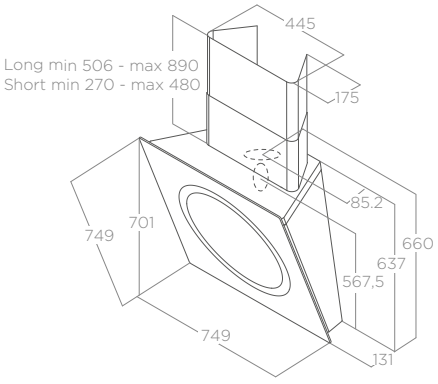

LIGHTING

Type	Strip Led 1×7 W
Intensity	421 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	680 m^3/h
Noise level min-max	48-60 dB(A)
Total absorption	177 W
Energy class	A++

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Long chimney kit	KIT0010439
Short chimney kit	KIT0010700

MODELS

OM AIR @ WH/F/75	PRF0094734A
OM AIR @ BL/F/75	PRF0094744A

Rules

Design Fabrizio Crisà



- **CONNEX**
- **COMFORT SILENCE**
- **DRY SYSTEM**
- **TOTAL INTEGRATION**
- **PERFECT ALIGNMENT**

12 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

60 - 90 - 120 cm

Filtering, convertible to ducting-out

Black glass, Dekton black “sirius”, Coverable

- Stainless steel grease filter included
- Regenerable charcoal filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

- Dim Light
- Regenerable filter
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING



LIGHTING

Type	Strip Led 1×7W (BL) Strip Led 2×7W (DEKT/NAKED)
Intensity	365 (BL) - 309 (DEKT/NAKED) LUX
Temperature	3500 K

PERFORMANCE

	BL	DEKT/NAKED
Controls	3S+B Capacitive touch control	3S+B Electronic Push Button
Booster airflow	700 m^3/h	700 m^3/h
Noise level min-max	40-58 dB(A)	40-58 dB(A)
Total absorption	277 W	280 W
Energy class	A	

ACCESSORIES

Regenerable charcoal filter (*)	CFC0166361
Stainless steel chimney kit	KIT0171543
Black chimney kit	KIT0166364

(*) for version 60, order 2 pieces, for version 90, order 3 pieces, for version 120, order 4 pieces

MODELS

RULES @ BL/F/60	PRF0163752A
RULES @ BL/F/90	PRF0163751A
RULES @ BL/F/120	PRF0163753A
RULES @ DEKT/F/60	PRF0163755A
RULES @ DEKT/F/90	PRF0163754A
RULES @ DEKT/F/120	PRF0163756A
RULES @ NAKED/F/60	PRF0163758A
RULES @ NAKED/F/90	PRF0163757A
RULES @ NAKED/F/120	PRF0163759A

21 - 36 cm

Super Plat

Design Fabrizio Crisà



- **CONNEX**
- **COMFORT SILENCE**
- **CAPTURE BOOSTER**

4 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

80 cm

Filtering, convertible to ducting-out

Black glass
Grey glass + cast iron effect

- Stainless steel grease filter included
- Regenerable charcoal filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

- Perimeter Aspiration
- Dim Light
- Regenerable filter
- Clean Mode
- Brushless
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

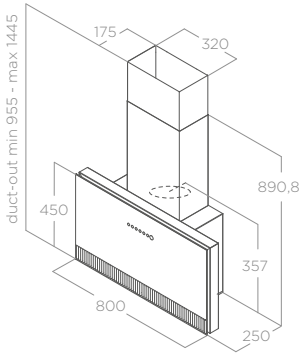

LIGHTING

Type	Strip Led 1×7W
Intensity	253 LUX
Temperature	3500 K

ACCESSORIES

Regenerable charcoal filter (*)	CFC0140423
Stainless steel chimney kit	KIT0171543
Black chimney kit	KIT0166364

(*) order 3 pieces

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	700 m^3/h
Noise level min-max	45-56 dB(A)
Total absorption	177 W
Energy class	A++

MODELS

SUPER PLAT @ BL/F/80	PRF0164980A
SUPER PLAT @ GR/F/80	PRF0165017A

Plat

Design Fabrizio Crisà



- **CONNEX**
- **COMFORT SILENCE**
- **CAPTURE BOOSTER**

TECHNICAL SPECIFICATIONS

55 - 80 cm	
Filtering, convertible to ducting-out	
Black glass, White glass	

- Aluminium grease filter included
- Regenerable charcoal filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

- Perimeter Aspiration
- Dim Light
- Regenerable filter
- Clean Mode
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

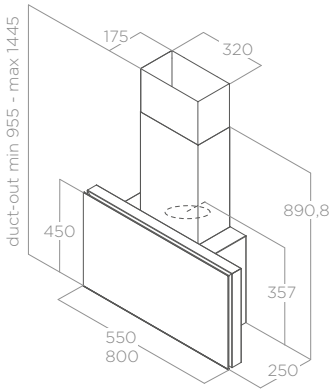

LIGHTING

Type	Strip Led 1×7 W
Intensity	365 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	710 m³/h
Noise level min-max	37-57 dB(A)
Total absorption	277 W
Energy class	A

ACCESSORIES

Regenerable charcoal filter (*)	CFC0140423
Stainless steel chimney kit	KIT0171543
Black chimney kit	KIT0166364

(*) for version 55, order 2 piece, for version 80, order 3 pieces

MODELS

PLAT @ BL/F/55	PRF0164946A
PLAT @ BL/F/80	PRF0164874A
PLAT @ WH/F/55	PRF0165707A
PLAT @ WH/F/80	PRF0165712A

Aplomb

Design Fabrizio Crisà



TECHNICAL SPECIFICATIONS

60 - 90 cm

Duct-out

Black glass, White glass

- Aluminium grease filter included
- Chimney included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	45 cm

FEATURES

- Perimeter Aspiration
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

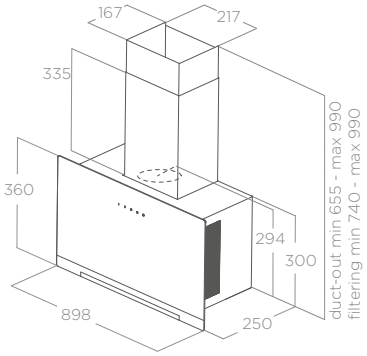

LIGHTING

Type	Strip Led 1×3W
Intensity	84 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	680 m^3/h
Noise level min-max	51-64 dB(A)
Total absorption	233 W
Energy class	A

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Black extension chimney kit H66	KIT0198956
White extension chimney kit H66	KIT0198957

MODELS

APLOMB WH/A/60	PRF0166940
APLOMB WH/A/90	PRF0166941
APLOMB BL/A/60	PRF0166938
APLOMB BL/A/90	PRF0166939

Bloom-S

Design Fabrizio Crisà



- **COMFORT SILENCE**
- **CAPTURE BOOSTER**

TECHNICAL SPECIFICATIONS

85 cm	
Duct-out	
White glass, Dekton black “Sirius”	

- 9-layer aluminium grease filter included
- Chimney included


MIN DISTANCE FROM HOB

Gas	55 cm
Induction/Radiant	45 cm

FEATURES

- Back Aspiration
- Brushless
- Clean Mode
- Maintenance Alarm

DIMENSIONAL DRAWING

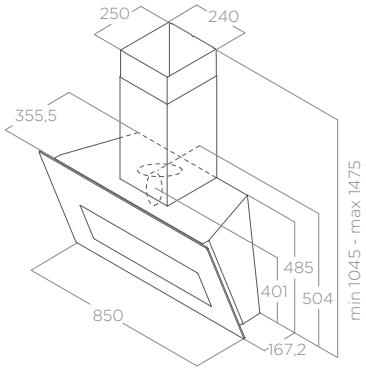

LIGHTING

Type	Strip Led 1×7 W
Intensity	309 LUX
Temperature	3000 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Infrared capacitive touch control
Booster airflow	700 m³/h
Noise level min-max	45-58 dB(A)
Total absorption	177 W
Energy class	A++

MODELS

BLOOM-S WH/A/85	PRF0164490A
BLOOM-S DEKT/A/85	PRF0164475A

Bloom

Design Fabrizio Crisà



- **COMFORT SILENCE**
- **CAPTURE BOOSTER**

TECHNICAL SPECIFICATIONS

85 cm	
Duct-out	
Black glass, Grey glass	
▪ 9-layer aluminium grease filter included ▪ Chimney included	


MIN DISTANCE FROM HOB

Gas	55 cm
Induction/Radiant	45 cm

FEATURES

- Clean Mode
- Back Aspiration
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

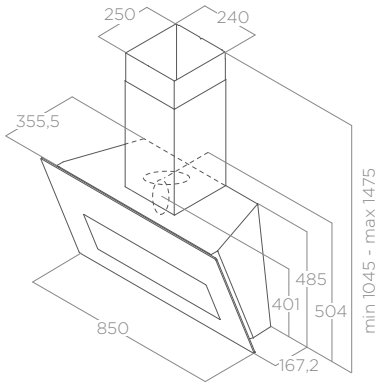

LIGHTING

Type	Strip Led 1×7 W
Intensity	309 LUX
Temperature	3000 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	770 m^3/h
Noise level min-max	37-57 dB(A)
Total absorption	277 W
Energy class	A+

MODELS

BLOOM BL/A/85	PRF0164459A
BLOOM GR/A/85	PRF0164462A

Rift

Design Fabrizio Crisà

■

CONNEX

Elica App and voice assistant for remote control and maintenance notifications. Connection with the hob to automatically adjust extraction and light.

■

COMFORT SILENCE

Extraction systems designed to limit noise, so you can cook and hold a conversation peacefully.

■


BLACK MATT

Matt black finish offering a minimal and contemporary style, while reducing reflections and simplifying cleaning.





DIMENSIONAL DRAWING

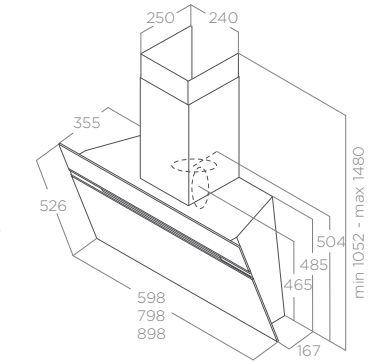

TECHNICAL SPECIFICATIONS

Size	60 - 80 - 90 cm
Version	Duct-out
Finishing	Matt black glass

- 9-layer aluminium grease filter included
- Chimney included

MIN DISTANCE FROM HOB

Gas	50 cm
Induction/Radiant	40 cm

FEATURES

- Dim Light
- Clean Mode
- Back Aspiration
- Brushless
- Delay Switch Off
- Maintenance Alarm

LIGHTING

Type	Strip Led 1×7 W
Intensity	365 LUX (60 cm) - 372 LUX (90 cm)
Temperature	3000 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	650 m^3/h (60cm) - 690 m^3/h (90cm)
Noise level min-max	44-58 dB(A)(60cm)- 46-59 dB(A) (90cm)
Total absorption	177 W
Energy class	A+ (60cm) / A++ (90cm)

MODELS

RIFT @ BLMAT/A/60	PRF0210230
RIFT @ BLMAT/A/80	PRF0210231
RIFT @ BLMAT/A/90	PRF0210232

Majestic No Drip

Design Fabrizio Crisà



■ **NO DRIP SYSTEM**

1 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

60 - 90 cm

Duct-out

Black glass + stainless steel

- Aluminium grease filter included
- Chimney included

MIN DISTANCE FROM HOB


Gas	60 cm
Induction/Radiant	40 cm

FEATURES

Back Aspiration

Maintenance Alarm

DIMENSIONAL DRAWING

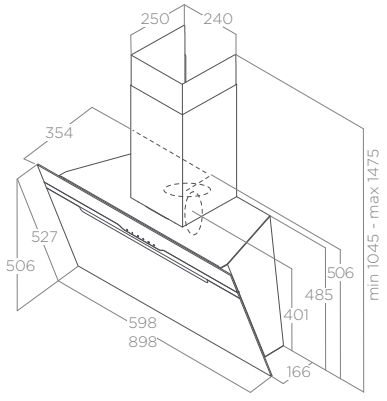

LIGHTING

Type	Strip Led 1×7 W
Intensity	253 LUX
Temperature	3000 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	600 m³/h
Noise level min-max	46-60 dB(A)
Total absorption	207 W
Energy class	A

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
White remote control	KIT0184524A
Black remote control	KIT0184525A

MODELS

MAJESTIC NO DRIP BL/A/60	PRF0147731
MAJESTIC NO DRIP BL/A/90	PRF0147732

Majestic

Design Fabrizio Crisà



■ **CONNEX**

TECHNICAL SPECIFICATIONS

60 - 90 cm	
Duct-out	
Black glass, White glass	

- Aluminium grease filter included


MIN DISTANCE FROM HOB

Gas	55 cm
Induction/Radiant	45 cm

FEATURES

- Dim Light
- Delay Switch Off
- Back Aspiration
- Maintenance Alarm

DIMENSIONAL DRAWING

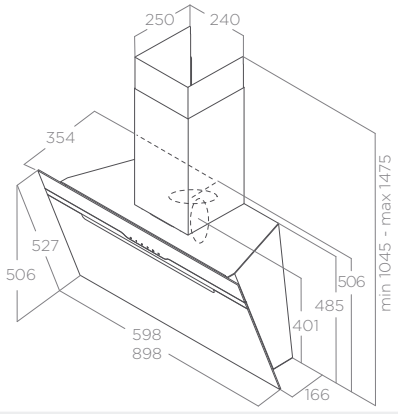

LIGHTING

Type	Led 2×2,5 W
Intensity	203 LUX
Temperature	3000 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	757 m³/h
Noise level min-max	50-65 dB(A)
Total absorption	265 W
Energy class	B

MODELS

MAJESTIC @ BL/A/60	PRF0117381B
MAJESTIC @ BL/A/90	PRF0116967B
MAJESTIC @ WH/A/60	PRF0124235B
MAJESTIC @ WH/A/90	PRF0124236B

Neat

Design Fabrizio Crisà



- **CONNEX**
- **COMFORT SILENCE**

TECHNICAL SPECIFICATIONS

60 - 80 - 90 cm	
Duct-out	
White glass, Black glass	
▪ 9-layer aluminium grease filter included ▪ Chimney included	


MIN DISTANCE FROM HOB

Gas	55 cm
Induction/Radiant	40 cm

FEATURES

- Dim Light
- Back Aspiration
- Brushless
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

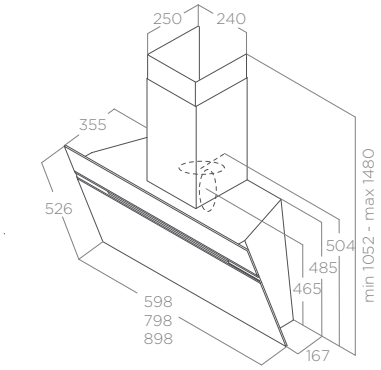

LIGHTING

Type	Strip Led 1×7W
Intensity	365 LUX (60 cm) - 372 LUX (90 cm)
Temperature	3000 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	650 m³/h (60cm) - 690 m³/h (80-90cm)
Noise level min-max	44-58 dB(A)(60cm)- 46-59 dB(A) (80-90cm)
Total absorption	177 W
Energy class	A+ (60cm) / A++ (80-90cm)

MODELS

NEAT @ BL/A/60	PRF0199509
NEAT @ BL/A/80	PRF0199572
NEAT @ BL/A/90	PRF0199536
NEAT @ WH/A/60	PRF0199573
NEAT @ WH/A/80	PRF0199575
NEAT @ WH/A/90	PRF0199574

Stripe No Drip

Design Fabrizio Crisà



■ **NO DRIP SYSTEM**

TECHNICAL SPECIFICATIONS

60 - 80 - 90 cm

Duct-out

Black glass, White glass

- Anti-condensation grease filter included
- Chimney included


MIN DISTANCE FROM HOB

Gas	55 cm
Induction/Radiant	45 cm

FEATURES

- Clean Mode
- Back Aspiration
- Maintenance Alarm

DIMENSIONAL DRAWING

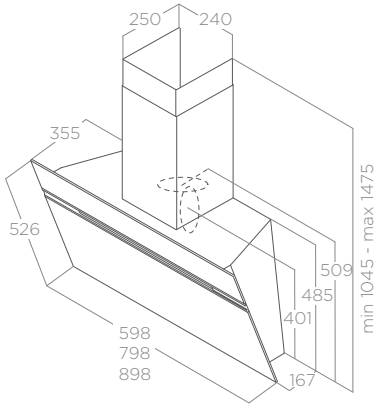

LIGHTING

Type	Strip Led 1×7 W
Intensity	253 LUX
Temperature	3000 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	620 m³/h
Noise level min-max	48-61 dB(A)
Total absorption	207 W
Energy class	A

MODELS

STRIPE NO DRIP BL/A/60	PRF0211305
STRIPE NO DRIP BL/A/80	PRF0211306
STRIPE NO DRIP BL/A/90	PRF0211307
STRIPE NO DRIP WH/A/60	PRF0211308
STRIPE NO DRIP WH/A/80	PRF0211309
STRIPE NO DRIP WH/A/90	PRF0211310



Stripe No Drip Black

Stripe A

Design Fabrizio Crisà



■ **BLACK MATT**

TECHNICAL SPECIFICATIONS

60 - 80 - 90 cm

Duct-out

Matt black glass

- Aluminium grease filter included
- Chimney included


MIN DISTANCE FROM HOB

Gas	55 cm
Induction/Radiant	45 cm

FEATURES

- Clean Mode
- Back Aspiration
- Maintenance Alarm

DIMENSIONAL DRAWING

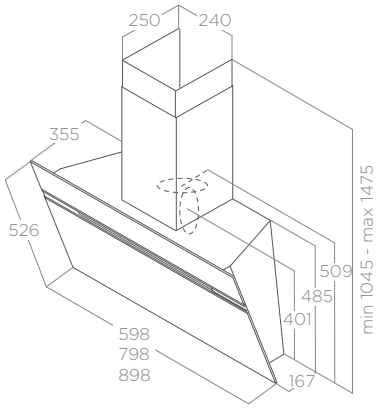

LIGHTING

Type	Led 2×2,5 W
Intensity	381 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	600 m³/h
Noise level min-max	46-60 dB(A)
Total absorption	205 W
Energy class	A

MODELS

STRIPE A BLMAT/A/60	PRF0210233
STRIPE A BLMAT/A/80	PRF0210234
STRIPE A BLMAT/A/90	PRF0210235

Stripe

Design Fabrizio Crisà



■ **CONNEX**

TECHNICAL SPECIFICATIONS

60 - 80 - 90 cm

Duct-out

Black glass, White glass

- Aluminium grease filter included
- Chimney included


MIN DISTANCE FROM HOB

Gas	50 cm
Induction/Radiant	40 cm

FEATURES

- Dim Light
- Clean Mode
- Back Aspiration
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

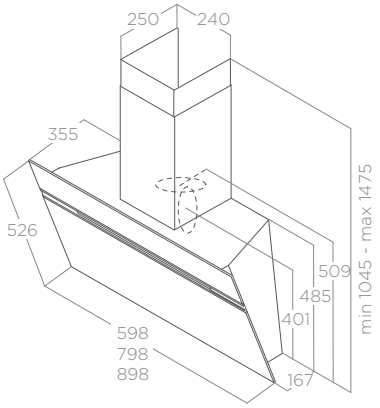

LIGHTING

Type	Led 2×2,5 W
Intensity	203 LUX
Temperature	3000 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	757 m^3/h
Noise level min-max	50-65 dB(A)
Total absorption	265 W
Energy class	B

MODELS

STRIPE @ BL/A/60	PRF0199704
STRIPE @ BL/A/80	PRF0199705
STRIPE @ BL/A/90	PRF0199706
STRIPE @ WH/A/60	PRF0199707
STRIPE @ WH/A/80	PRF0199708
STRIPE @ WH/A/90	PRF0199709

Just Dry

Design Fabrizio Crisà



- **BLACK MATT**
- **CONNEX (*)**
- **DRY SYSTEM**

TECHNICAL SPECIFICATIONS

55 - 80 cm	
Duct-out	
Black glass, Matt black glass	

- Anti-condensation grease filter included
- Chimney included


MIN DISTANCE FROM HOB

Gas	60 cm
Induction/Radiant	45 cm

FEATURES

- Perimeter Aspiration
- Dim Light (*)
- Clean Mode
- Delay Switch Off (*)
- Maintenance Alarm

DIMENSIONAL DRAWING

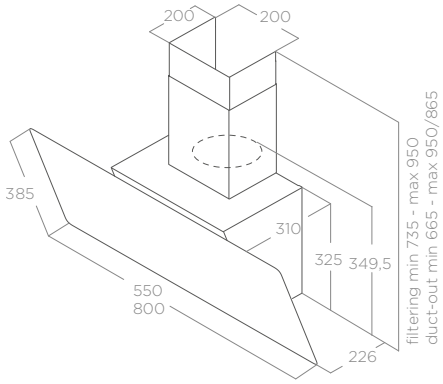

LIGHTING

Type	Led 2×2,5 W
Intensity	381 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	670 m³/h
Noise level min-max	52-64 dB(A)
Total absorption	275 W
Energy class	A

MODELS

JUST DRY BLMAT/A/55	PRF0214295
JUST DRY BLMAT/A/80	PRF0214296
CONNECTED MODELS	
JUST DRY @ BLMAT/A/55 (*)	PRF0210236
JUST DRY @ BLMAT/A/80 (*)	PRF0210237





↑ Just Dry Matt Black

L’ Essenza

Design Fabrizio Crisà



TECHNICAL SPECIFICATIONS

60 - 90 cm

Duct-out

White glass, Black glass

- Aluminium grease filter included
- Chimney included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	45 cm

FEATURES

- Perimeter Aspiration
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

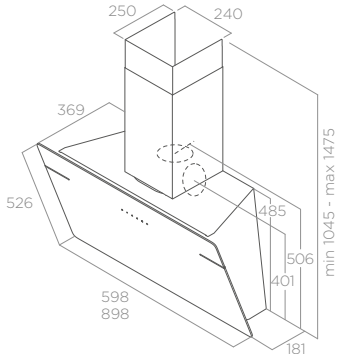

LIGHTING

Type	Led 2×2,5 W
Intensity	145 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	691 m³/h
Noise level min-max	49-65 dB(A)
Total absorption	255 W
Energy class	B

MODELS

L’ESSENZA BL/A/60	PRF0117403A
L’ESSENZA BL/A/90	PRF0117374A
L’ESSENZA WH/A/60	PRF0124233A
L’ESSENZA WH/A/90	PRF0124234A

Shire



TECHNICAL SPECIFICATIONS

60 - 90 cm

Duct-out

White glass, Black glass

- Aluminium grease filter included
- Chimney included


FEATURES

Perimeter Aspiration

Delay Switch Off

Maintenance Alarm

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	45 cm

LIGHTING

Type	Led 2×1 W
Intensity	120 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	650 m^3/h
Noise level min-max	52-64 dB(A)
Total absorption	232 W
Energy class	A

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Black extension chimney kit H66	KIT0198956
White extension chimney kit H66	KIT0198957

MODELS

SHIRE BL/A/60	PRF0119819A
SHIRE BL/A/90	PRF0119829A
SHIRE WH/A/60	PRF0119823A
SHIRE WH/A/90	PRF0119828A

Shy-S



TECHNICAL SPECIFICATIONS

60 - 90 cm

Duct-out

White glass, Black glass

- Aluminium grease filter included
- Chimney included


FEATURES

Perimeter Aspiration

Delay Switch Off

Maintenance Alarm

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	45 cm

LIGHTING

Type	Led 2×1,5 W
Intensity	180 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	650 m^3/h
Noise level min-max	52-65 dB(A)
Total absorption	233 W
Energy class	A

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Black extension chimney kit H66	KIT0198956
White extension chimney kit H66	KIT0198957

MODELS

SHY-S BL/A/60	PRF0166932
SHY-S BL/A/90	PRF0166933
SHY-S WH/A/60	PRF0166934
SHY-S WH/A/90	PRF0166935

Haiku

Design Fabrizio Crisà

8 PRODUCT DESIGN AWARDS WINNER

Pag. 16

CONNEX (*)

Elica App and voice assistant for remote control and maintenance notifications. Connection with the hob to automatically adjust extraction and light.

COMFORT SILENCE

Extraction systems designed to limit noise, so you can cook and hold a conversation peacefully.

PERFECT ALIGNMENT

Wall-mounted hood with precisely adjustable depth, for accurate alignment with kitchen cabinets.


BLACK MATT

Matt black finish offering a minimal and contemporary style, while reducing reflections and simplifying cleaning.





DIMENSIONAL DRAWING

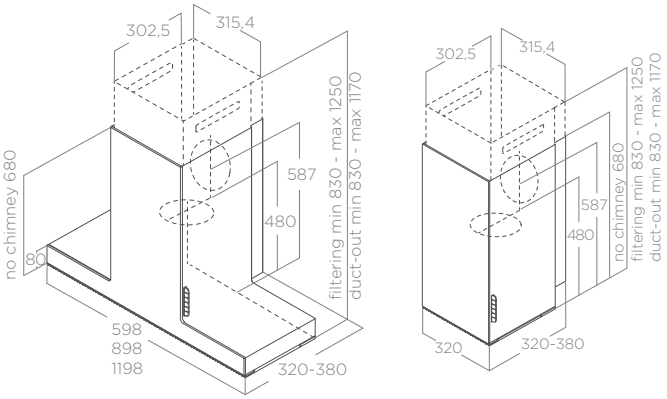

TECHNICAL SPECIFICATIONS

Size	32 - 60 - 90 - 120 cm
Version	Duct-out
Finishing	White Krion, Matt black

- Aluminium grease filter included

FEATURES

- Maintenance Alarm
- Back Aspiration
- Delay Switch Off (*)

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Strip Led 1×7 W
Intensity	253 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A

PERFORMANCE

Controls	3S+2B Electronic Push Button
Booster airflow	690 m^3/h
Noise level min-max	34-51 dB(A)
Total absorption	277 W
Energy class	A

MODELS

HAIKU WH/A/32	PRF0146267
HAIKU WH/A/60	PRF0146268
HAIKU WH/A/90	PRF0146269
HAIKU WH/A/120	PRF0146270

CONNECTED MODELS

HAIKU @ BLMAT/A/32 (*)	PRF0211367
HAIKU @ BLMAT/A/60 (*)	PRF0211333
HAIKU @ BLMAT/A/90 (*)	PRF0211334
HAIKU @ BLMAT/A/120 (*)	PRF0211335







← Haiku Matt Black

Haiku Dry

Design Fabrizio Crisà

8 PRODUCT DESIGN AWARDS WINNER

Pag. 16

BLACK MATT

Matt black finish offering a minimal and contemporary style, while reducing reflections and simplifying cleaning.

COMFORT SILENCE

Extraction systems designed to limit noise, so you can cook and hold a conversation peacefully.

CONNEX

Elica App and voice assistant for remote control and maintenance notifications. Connection with the hob to automatically adjust extraction and light.

DRY SYSTEM

Thanks to a studied design and inclined grids, the system channels condensation dropplets into dedicated containers.


PERFECT ALIGNMENT

Wall-mounted hood with precisely adjustable depth, for accurate alignment with kitchen cabinets.





DIMENSIONAL DRAWING

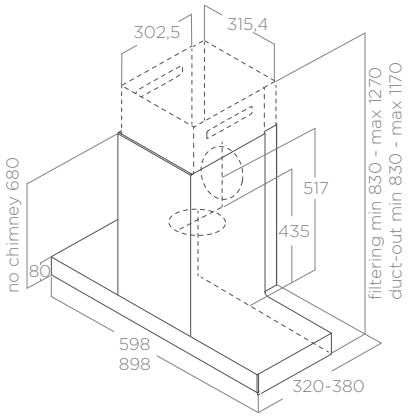

TECHNICAL SPECIFICATIONS

Size	60 - 90 cm
Version	Duct-out
Finishing	Matt black + black glass

- Stainless steel grease filter included

FEATURES

- Dim Light
- Clean Mode
- Back Aspiration
- Brushless
- Delay Switch Off
- Maintenance Alarm

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Strip Led 1×7 W
Intensity	533 (60cm) - 365 (90cm) LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	680 m^3/h
Noise level min-max	41-57 dB(A)
Total absorption	177 W
Energy class	A+

MODELS

HAIKU DRY @ BLRO/A/60	PRF0196763
HAIKU DRY @ BLRO/A/90	PRF0197397

Bio

Design Fabrizio Crisà



- **BLACK MATT**
- **CONNEX**
- **COMFORT SILENCE**
- **MODULAR DESIGN**
- **LIGHTING EXPERIENCE**

7 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

90 cm
Duct-out
Natural oak + matt white, Natural oak + matt black
▪ Aluminium grease filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

- Dim Light
- Tune White
- Brushless
- Maintenance Alarm

DIMENSIONAL DRAWING

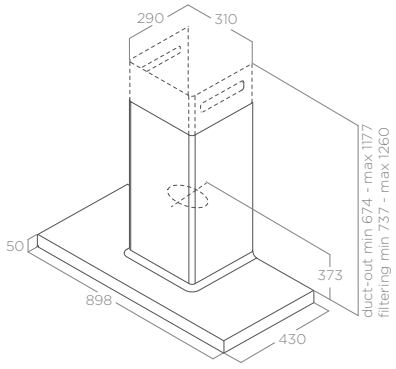

LIGHTING

Type	Strip Led 1×7 W
Intensity	113 LUX
Temperature	2700 - 6500 K

PERFORMANCE

Controls	3S+2B Electronic Push Button
Booster airflow	680 m³/h
Noise level min-max	44-58 dB(A)
Total absorption	177 W
Energy class	A++

ACCESSORIES

Charcoal filter	CFC0141725A
First installation HP filtering kit	KIT0160440
Regenerable charcoal filter HP	CFC0140091
Oak wall shelf kit 60cm	KIT0120946
White remote control	KIT0184524A
Black remote control	KIT0184525A

MODELS

BIO @ WH/A/90 ROVERE	PRF0147266B
BIO @ BLRO/A/90 ROVERE	PRF0200562A





↑ Bio Matt Black

Element

Design Fabrizio Crisà

8 PRODUCT DESIGN AWARDS WINNER
Pag. 16

■

CONNEX

Elica App and voice assistant for remote control and maintenance notifications. Connection with the hob to automatically adjust extraction and light.

■

COMFORT SILENCE

Extraction systems designed to limit noise, so you can cook and hold a conversation peacefully.

■

MODULAR DESIGN

The product can be easily and flexibly adapted thanks to accessories that make it suitable for the style of your kitchen.


■

BLACK MATT


Matt black finish offering a minimal and contemporary style, while reducing reflections and simplifying cleaning.



Element Matt Black

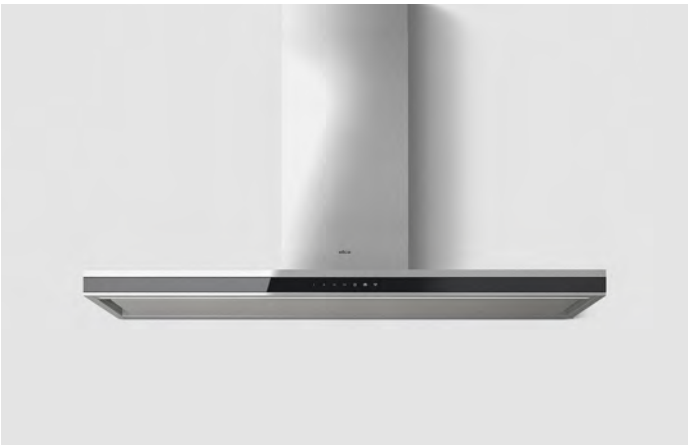

DIMENSIONAL DRAWING

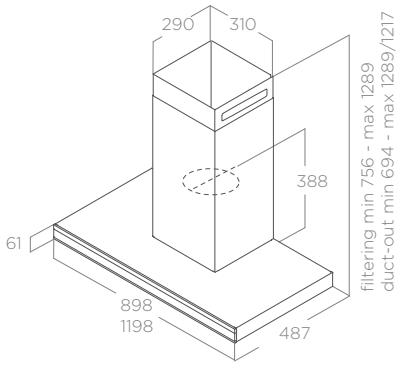

TECHNICAL SPECIFICATIONS

Size	90 - 120 cm
Version	Duct-out
Finishing	Stainless steel + black glass, Matt black + black glass

- Aluminium grease filter included

FEATURES

- Perimeter Aspiration
- Brushless
- Dim Light
- Delay Switch Off
- Clean Mode
- Maintenance Alarm

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Strip Led 1×7 W
Intensity	365 (90cm) - 309 (120cm) LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Kit Shelf matt black 60cm	KIT0199583
Stainless steel wall shelf kit 60cm	KIT0199584

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	620 m^3/h
Noise level min-max	42-58 dB(A)
Total absorption	177 W
Energy class	A+

MODELS

ELEMENT @ IXBL/A/90	PRF0194157
ELEMENT @ IXBL/A/120	PRF0196972
ELEMENT @ BLMAT/A/90	PRF0194415
ELEMENT @ BLMAT/A/120	PRF0196976

Sweet

Design Fabrizio Crisà



■ **BLACK MATT**

3 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

85 cm

Duct-out / Filtering

Painted: matt white, matt taupe, matt copper, peltrox, sage, moon black, sweet embrace, bronze, peach fuzz

- Aluminium grease filter included
- Chimney extension included


MIN DISTANCE FROM HOB

Gas	70 cm
Induction/Radiant	60 cm

FEATURES

- Back Aspiration
- Regenerable filter
- Clean Mode
- Maintenance Alarm

DIMENSIONAL DRAWING

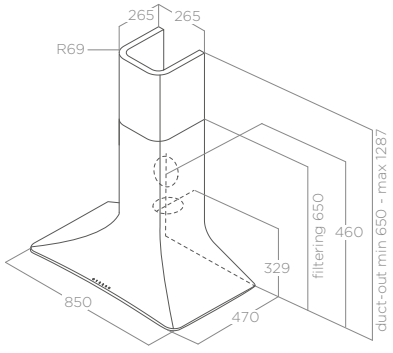

LIGHTING

Type	Strip Led 1×7 W
Intensity	197 LUX
Temperature	4000 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	580 m^3/h
Noise level min-max	46-61 dB(A)
Total absorption	207 W
Energy class	A

ACCESSORIES

Regenerable charcoal filter	CFC0140426

MODELS

SWEET MOON BLACK/A/85 + CAM	PRF0201740
SWEET WHITE/A/85+CAM	PRF0167320
SWEET PEACH FUZZ/A/85 + CAM	PRF0201750
SWEET TAUPE/A/85 + CAM	PRF0201746
SWEET COPPER/A/85 + CAM	PRF0167324
SWEET PELTROX/A/85 + CAM	PRF0167323
SWEET SAGE/A/85 + CAM	PRF0201742
SWEET EMBRACE/A/85 + CAM	PRF0201744
SWEET BRONZE/A/85 + CAM	PRF0201748

Showcasing

Sweet





Adéle

Design Fabrizio Crisà



- **BLACK MATT**
- **CONNEX**

TECHNICAL SPECIFICATIONS

60 - 90 cm	
Duct-out	
Stainless steel + black glass, Matt black + black glass	

- Aluminium grease filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

- Dim Light
- Delay Switch Off
- Clean Mode
- Maintenance Alarm

DIMENSIONAL DRAWING

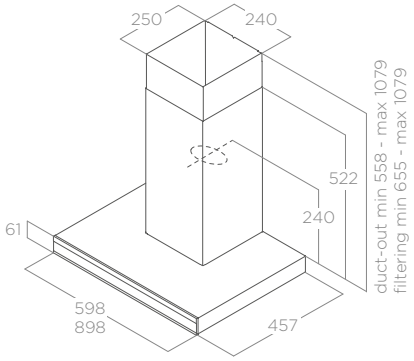

LIGHTING

Type	Strip Led 1×7 W
Intensity	421 LUX
Temperature	3000 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	770 m^3/h
Noise level min-max	55-69 dB(A)
Total absorption	277 W
Energy class	A

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Stainless steel chimney extension kit H81	KIT00780
Black chimney extension kit H81	KIT0181149
Island installation extension kit H15 (false ceiling	KIT01600

MODELS

ADÉLE @ IXBL/A/60	PRF0199700
ADÉLE @ IXBL/A/90	PRF0199701
ADÉLE @ BLMAT/A/60	PRF0199698
ADÉLE @ BLMAT/A/90	PRF0199699



Adele Matt Black

Lol

Design Fabrizio Crisà



■ **BLACK MATT**

TECHNICAL SPECIFICATIONS

60 - 90 cm

Duct-out

Stainless steel, Matt white, Matt black

■ Black aluminium grease filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

Maintenance Alarm

DIMENSIONAL DRAWING

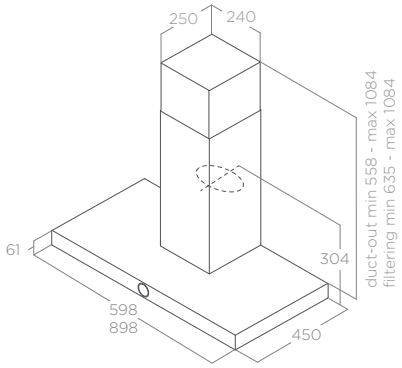

LIGHTING

Type	Led 2×2,5 W
Intensity	381 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S + B Electronic Rotative Black
Booster airflow	620 m³/h
Noise level min-max	52-67 dB(A)
Total absorption	205 W
Energy class	A

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Stainless steel chimney extension kit H81	KIT00780
Black chimney extension kit H81	KIT0181149

MODELS

LOL IX/A/60	PRF0097149A
LOL IX/A/90	PRF0097323A
LOL BL/A/60 MOON EDITION	PRF0186279
LOL BL/A/90 MOON EDITION	PRF0186280
LOL WH/A/60 MOON EDITION	PRF0186281
LOL WH/A/90 MOON EDITION	PRF0186282

Joy



■ **BLACK MATT**

TECHNICAL SPECIFICATIONS

60 - 90 cm	
Duct-out	
Stainless steel + White glass, Stainless steel + black glass, Stainless steel + black matt glass	
▪ Aluminium grease filter included	


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

- Clean Mode
- Maintenance Alarm

DIMENSIONAL DRAWING

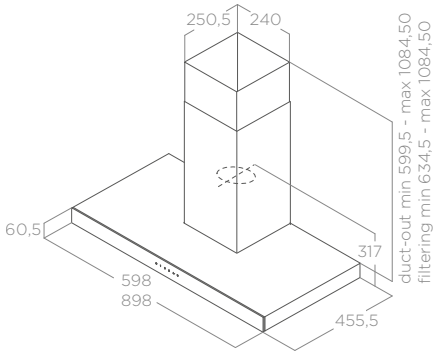

LIGHTING

Type	Led 2×2,5 W
Intensity	381 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Stainless steel chimney extension kit H81	KIT00780

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	713 m^3/h
Noise level min-max	51-69 dB(A)
Total absorption	265 W
Energy class	B

MODELS

JOY BLIX/A/60	PRF0104625A
JOY BLIX/A/90	PRF0104626A
JOY WHIX/A/60	PRF0104630A
JOY WHIX/A/90	PRF0104631A
JOY BLMAT/A/60	PRF0215788
JOY BLMAT/A/90	PRF0215795

Regula

Design Fabrizio Crisà



- **BLACK MATT**
- **CONNEX**
- **AIRMATIC**

TECHNICAL SPECIFICATIONS

60 - 90 - 120

Duct-out

Stainless steel, Matt black

- 9-layer aluminium grease filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

- Dim Light
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

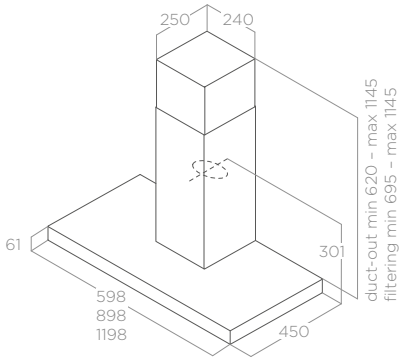

LIGHTING

Type	Strip Led 1×7 W
Intensity	365 LUX
Temperature	3000 K

PERFORMANCE

Controls	3S + B Touch control
Booster airflow	600 m³/h
Noise level min-max	50-65 dB(A)
Total absorption	207 W
Energy class	A

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Stainless steel chimney kit H810	KIT00780
Matt black chimney kit H810	KIT0181149

MODELS

REGULA @ IX/A/60	PRF0211329
REGULA @ IX/A/90	PRF0211330
REGULA @ IX/A/120	PRF0214098
REGULA @ BLMAT/A/60	PRF0211331
REGULA @ BLMAT/A/90	PRF0211332
REGULA @ BLMAT/A/120	PRF0214099

Spot Ng



TECHNICAL SPECIFICATIONS

60 - 90 - 120 cm

Duct-out

Stainless steel

- Aluminium grease filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

Maintenance Alarm

DIMENSIONAL DRAWING

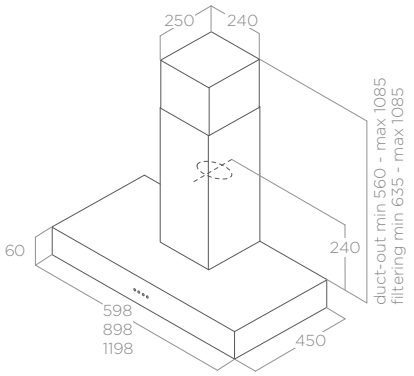

LIGHTING

Type	Led 2×2,5 W (60cm,90cm) - Led 3×2,5 W (120cm)
Intensity	381 (60cm,90cm) - 571 (120cm) LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Stainless steel chimney extension kit H81	KIT00780

PERFORMANCE

Controls	3S Mechanical Push Button
Max airflow	368 m³/h
Noise level min-max	55-62 dB(A)
Total absorption	140 (60cm,90cm) - 142.5 (120cm) W
Energy class	D

MODELS

SPOT NG H6 IX/A/60	55916388A
SPOT NG H6 IX/A/90	55916389A
SPOT NG H6 IX/A/120	PRF0099407A

Stone



TECHNICAL SPECIFICATIONS


Ø 33 cm

Filtering

Stainless steel, White

- Aluminium grease filter included

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×2,5 W
Intensity	457 LUX
Temperature	2700 K

PERFORMANCE

Controls	3S Soft light push button
Max airflow	559 m³/h
Noise level min-max	44-67 dB(A)
Total absorption	180 W
Energy class	C

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A

MODELS

STONE IX/A/33	61412862B
STONE WH/A/33	PRF0007123A

Tube Pro



TECHNICAL SPECIFICATIONS

Ø 43 cm

Duct-out


Stainless steel, Matt black, Matt white

- Aluminium grease filter included

FEATURES

Back Aspiration

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×3 W
Intensity	457 LUX
Temperature	2700 K

PERFORMANCE

Controls	3S Mechanical Push Button
Max airflow	603 m³/h
Noise level min-max	47-68 dB(A)
Total absorption	256 W
Energy class	C

ACCESSORIES

Regenerable charcoal filter	CFC0140423

MODELS

TUBE PRO IX/A/43	PRF0080075B
TUBE PRO BL MAT/A/43	PRF0090719B
TUBE PRO WH MAT/A/43	PRF0090720B

Tamaya 2.0 Rail



TECHNICAL SPECIFICATIONS


60 - 90 cm

Duct-out

Anthracite + bronze ladle holder,
Ivory + bronze ladle holder

- Aluminium grease filter included

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×2,5 W
Intensity	381 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S Mechanical Push Button
Max airflow	435 m^3/h
Noise level min-max	56-65 dB(A)
Total absorption	145 W
Energy class	D

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

MODELS

TAMAYA RAIL ANBR/A/60	PRF0172861
TAMAYA RAIL ANBR/A/90	PRF0177406
TAMAYA RAIL CRBR/A/60	PRF0177408
TAMAYA RAIL CRBR/A/90	PRF0177418

Missy



TECHNICAL SPECIFICATIONS


60 - 90 cm

Duct-out

Stainless steel, black, white

- Aluminium grease filter included

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×3 W
Intensity	97 LUX
Temperature	2700 K

PERFORMANCE

Controls	3S Mechanical Push Button
Max airflow	395 m^3/h
Noise level min-max	49-68 dB(A)
Total absorption	96 W
Energy class	D

ACCESSORIES

Charcoal filter	CFC0141497

MODELS

MISSY PB IX/A/60	PRF0091761B
MISSY PB IX/A/90	PRF0091763B
MISSY BL/A/60	PRF0151543
MISSY BL/A/90	PRF0151544
MISSY LX IX/A/60	PRF0057572B
MISSY LX IX/A/90	PRF0057573B
MISSY LX WH/A/60	PRF0057574B

Coraline



TECHNICAL SPECIFICATIONS


60 - 90 cm

Duct-out

White + unfinished tulipwood frame

- Aluminium grease filter included

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2 × 3 W
Intensity	73 LUX
Temperature	2700 K

PERFORMANCE

Controls	3S Slider
Max airflow	435 m³/h
Noise level min-max	56-65 dB(A)
Total absorption	146 W
Energy class	D

ACCESSORIES

Charcoal filter	CFC0140343

MODELS

CORALINE WH/A/60 T.GREZZO	PRF0041810B
CORALINE WH/A/90 T.GREZZO	PRF0041832B

Memphis



TECHNICAL SPECIFICATIONS


90 cm

Duct-out

White + unfinished tulipwood frame

- Aluminium grease filter included

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×3 W
Intensity	73 LUX
Temperature	2700 K

PERFORMANCE

Controls	3S Mechanical Slider
Max airflow	435 m³/h
Noise level min-max	56-65 dB(A)
Total absorption	146 W
Energy class	D

ACCESSORIES

Charcoal filter	CFC0140343

MODELS

MEMPHIS WH/A/90 T.GREZZO	PRF0041897B


Mensola



TECHNICAL SPECIFICATIONS

60 - 90 cm	
Duct-out	
White + unfinished tulipwood frame	
▪ Aluminium grease filter included	

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×3 W
Intensity	73 LUX
Temperature	2700 K

PERFORMANCE

Controls	3S Mechanical Slider
Max airflow	435 m^3/h
Noise level min-max	56-65 dB(A)
Total absorption	146 W
Energy class	D

ACCESSORIES

Charcoal filter	CFC0140343

MODELS

MENSOLA WH/A/60 T.GREZZO	PRF0041970B
MENSOLA WH/A/90 T.GREZZO	PRF0041971B


Oretta



TECHNICAL SPECIFICATIONS

60 - 90 cm	
Duct-out	
White + unfinished tulipwood frame	
▪ Aluminium grease filter included	

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×3 W
Intensity	73 LUX
Temperature	2700 K

PERFORMANCE

Controls	3S Mechanical Slider
Max airflow	435 m^3/h
Noise level min-max	56-65 dB(A)
Total absorption	146 W
Energy class	D

ACCESSORIES


Charcoal filter	CFC0140343

MODELS


ORETTA WH/A/60 T.GREZZO	PRF0041954B
ORETTA WH/A/90 T.GREZZO	PRF0041955B

Technical drawings


Adéle

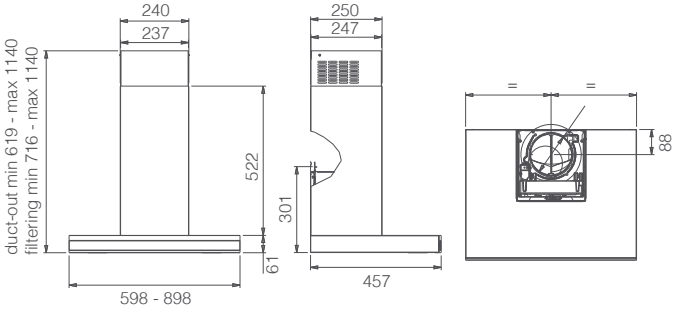


Aplomb

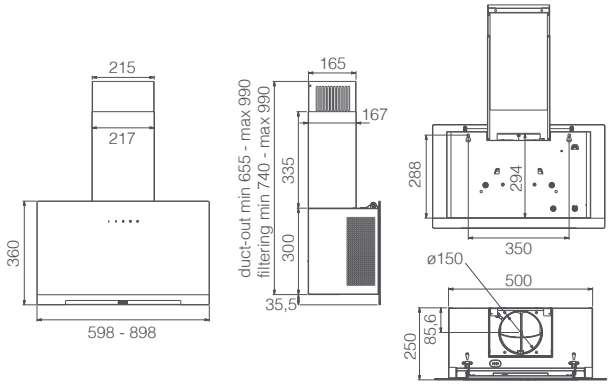


Bio

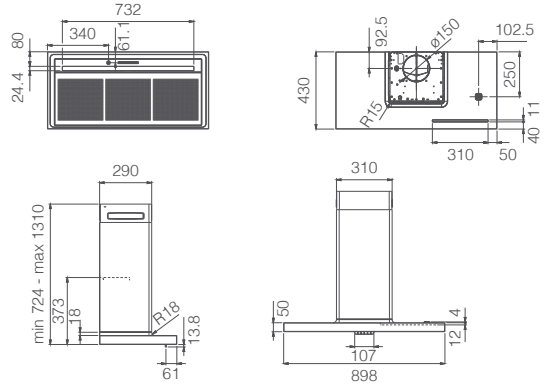


Bloom / Bloom-S

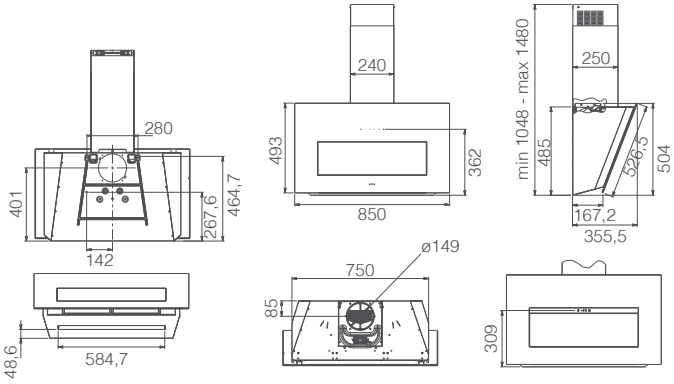


Coraline

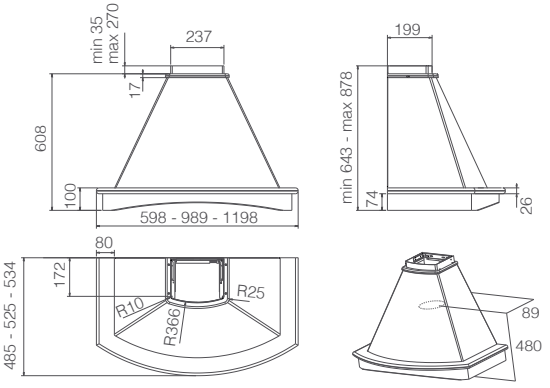


Element

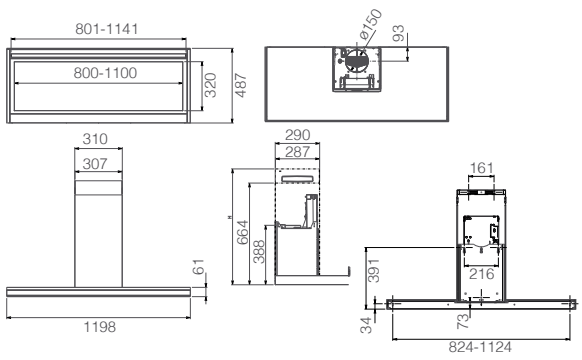


Haiku

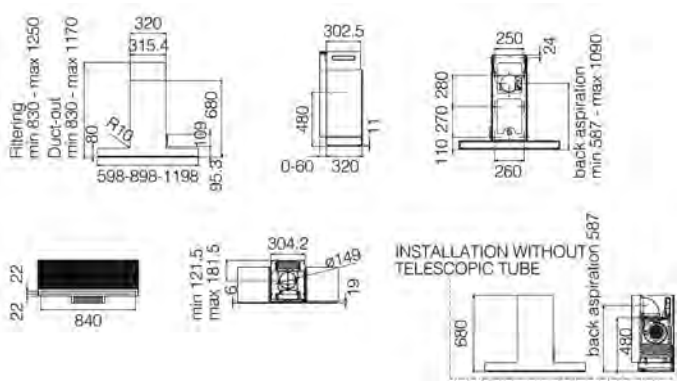


Haiku 32

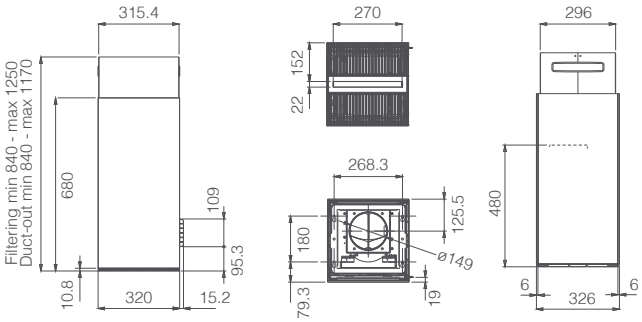


Haiku Dry

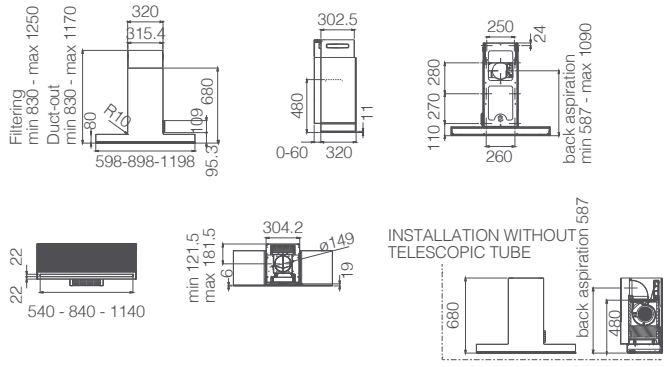


Joy

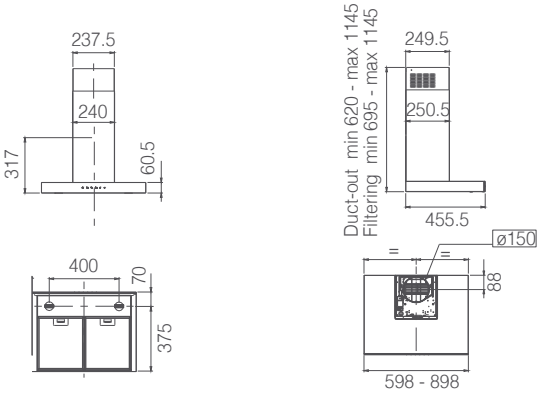


Just Dry

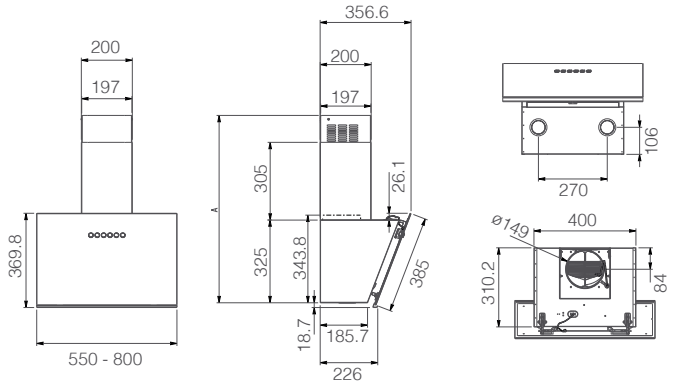


L'Essenza

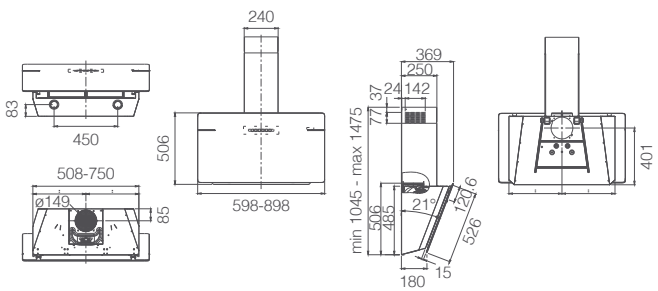


Lol

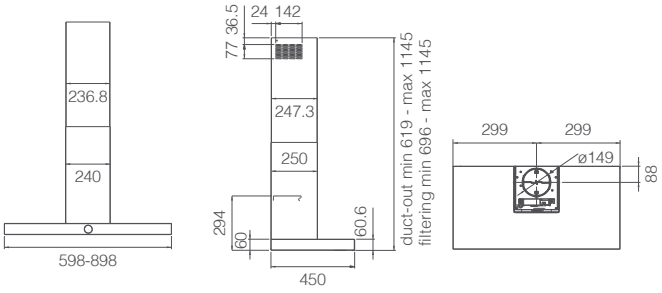


Majestic

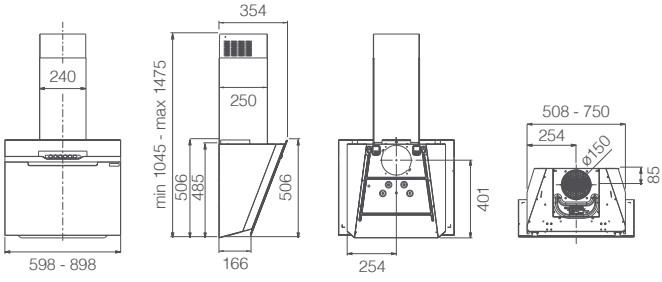


Majestic No Drip

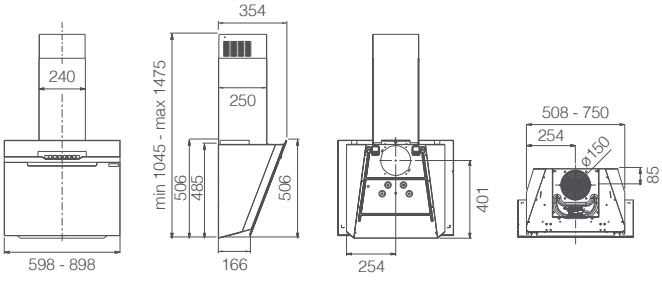


Memphis

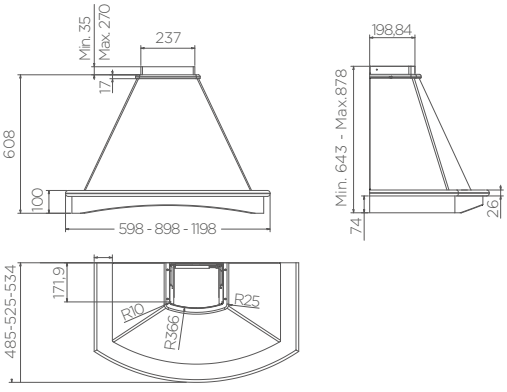


Mensola

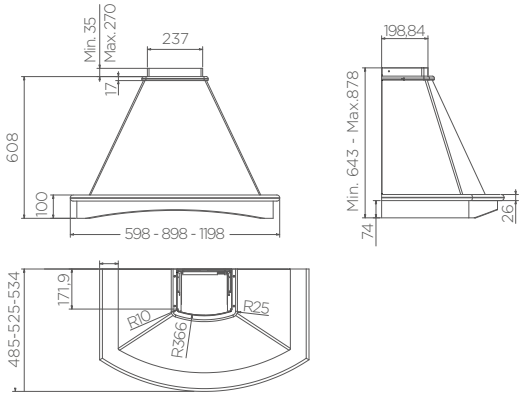


Missy

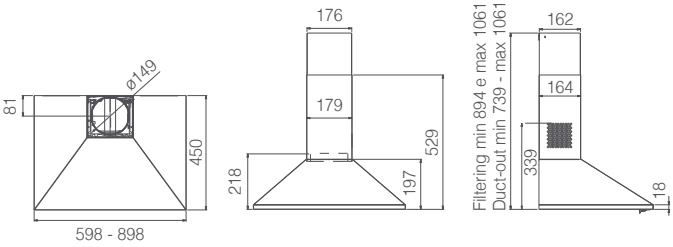


Neat

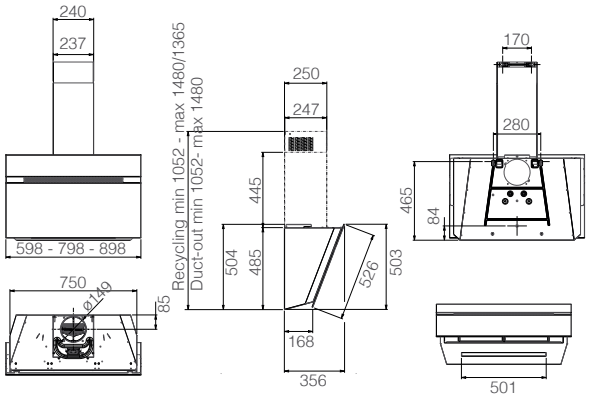


Om Air

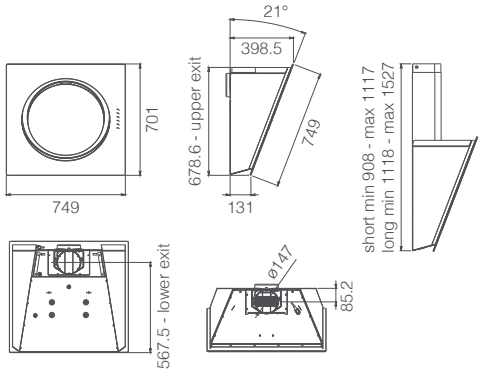


Oretta

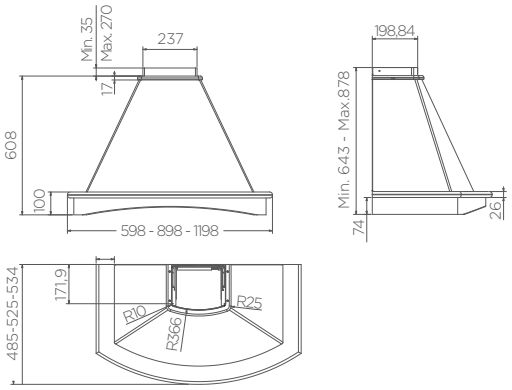


Plat

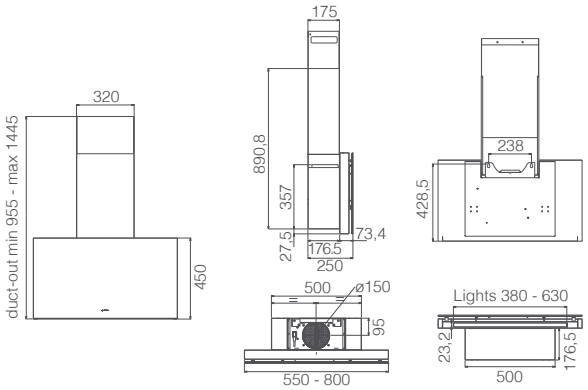


Regula

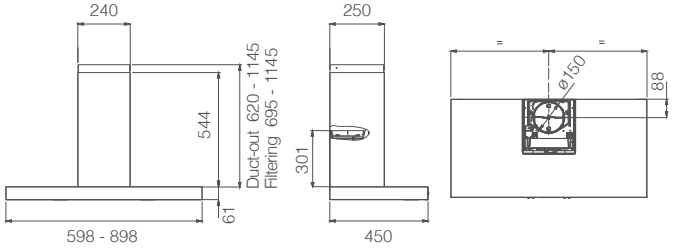


Rift

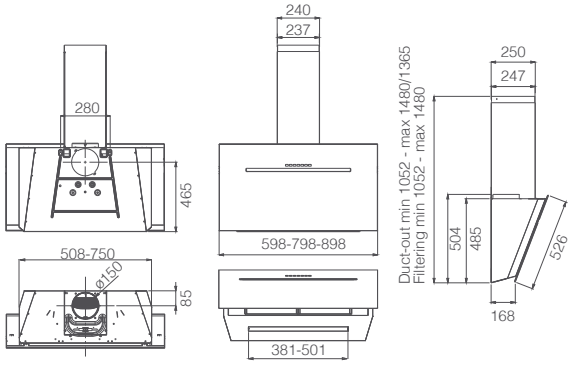


Rules

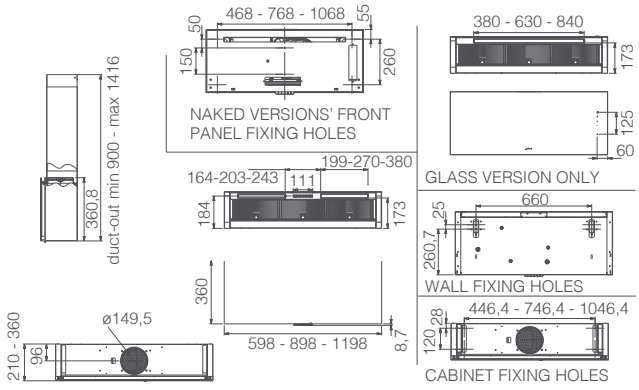


Shire

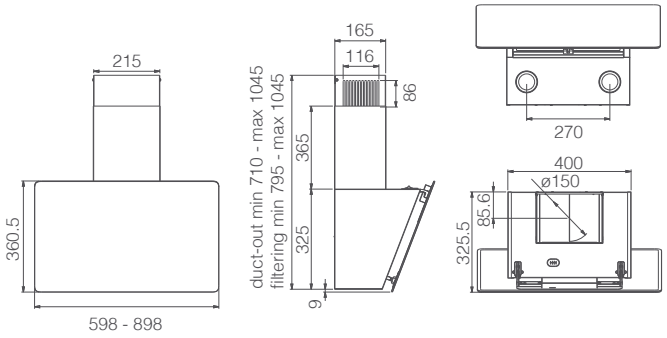


Shy-S

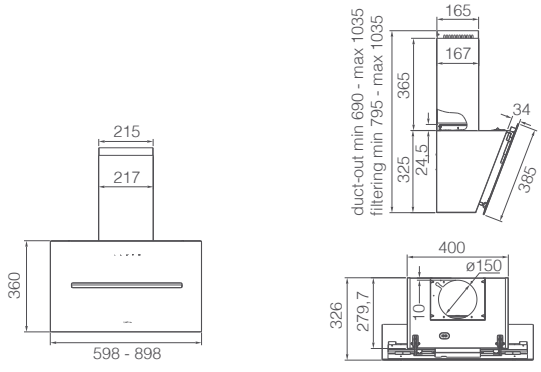


Spot Ng

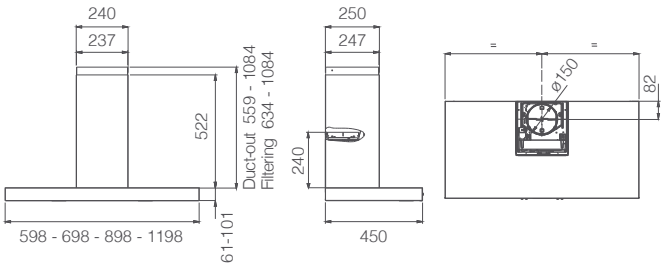


Stone

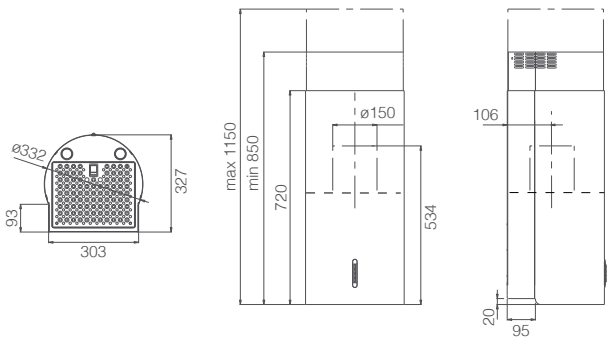


Stripe

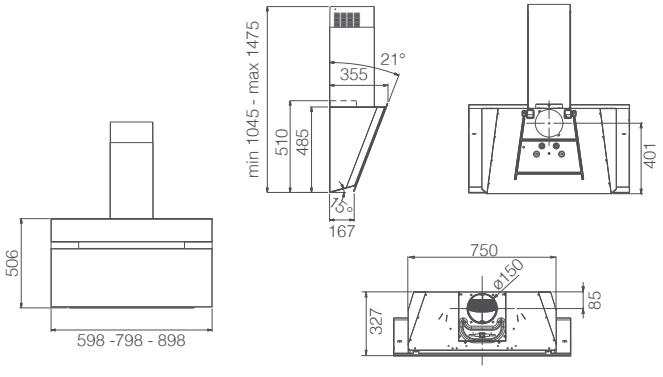


Stripe A

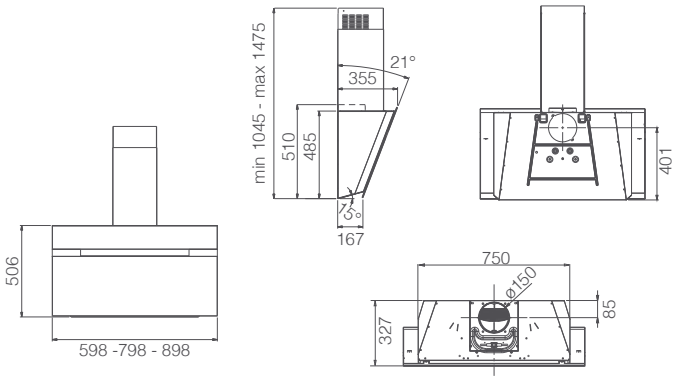


Stripe No Drip

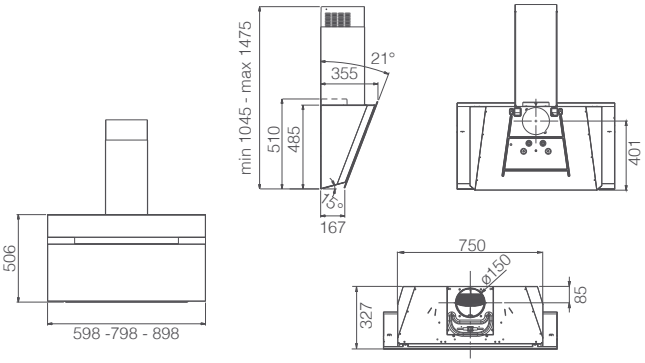


Super Plat

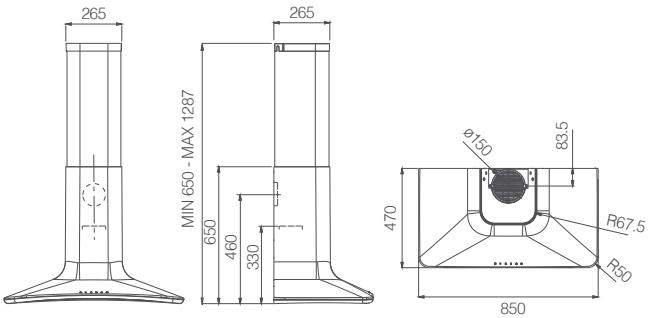


Sweet

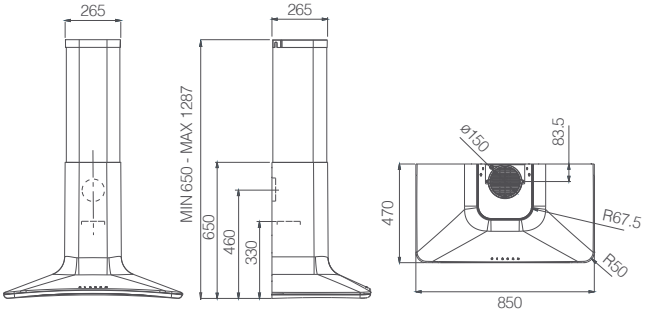

Tamaya Rail

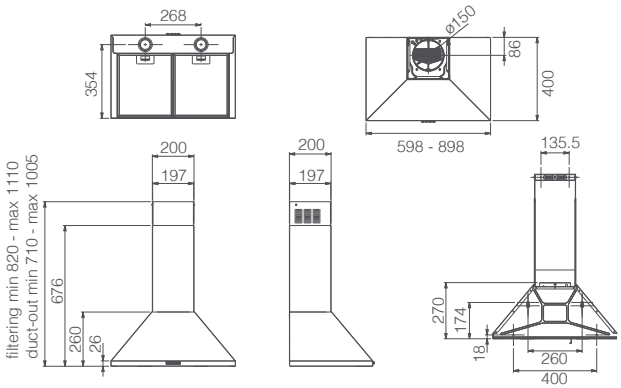

Tube Pro

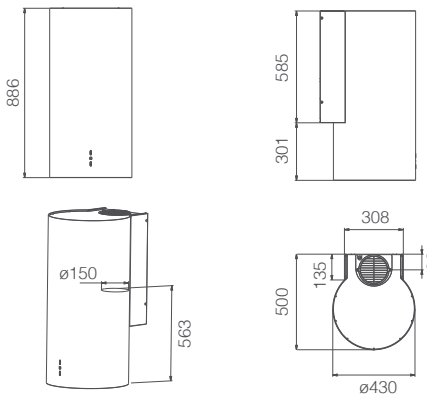

Comparative table Wall-mounted Hoods

MODEL	APLOMB	BLOOM	BLOOM-S	JUST DRY	MAJESTIC	MAJESTIC NO DRIP	NEAT	OM AIR	PLAT
SIZE (CM)	60 - 90	85	85	55 - 80	60 - 90	60 - 90	60 - 80 - 90	75	55 - 80
FINISHING	black glass, white glass	black glass, grey glass	white glass, black dekton “Sirius”	black glass, glass matt black	white glass, black glass	Black glass + stainless steel	White glass, black glass	White glass, black glass	White glass, black glass
VERSION	duct-out	c	GFA 9-layer	duct-out	duct-out	duct-out	duct-out	Filtering, convertible to ducting-out	Filtering, convertible to ducting-out
CONTROLS	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Infrared capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control
TYPE OF GREASE FILTER	GFA	GFA 9-layer	GFA 9-layer	GFA Anti-condensation	GFA	GFA	GFA 9-layer	GFA	GFA
DISTANCE FROM ELECTRIC HOB	45 cm	45 cm	45 cm	45 cm	45 cm	40 cm	40 cm	44 cm	50 cm
DISTANCE FROM GAS HOB	65 cm	55 cm	55 cm	65 cm	55 cm	60 cm	55 cm	55 cm	65 cm
AIRFLOW MIN-MAX(BOOST) M³/H	275 - 495 (680)	185 - 400 (770)	218 - 485 (700)	300 - 530 (670)	304 - 603 (757)	245 - 485 (600)	200-450(650) 60cm 210-475(690) 80-90cm	210 - 470 (680)	160 - 420 (710)
NOISE LEVEL MIN-MAX(BOOST) DB(A)	51-64 (71)	37 - 57 (70)	45-58 (67)	57-64 (69)	50-65 (69)	46 - 60 (66)	44-58(66) 60cm 46-59(67) 80-90cm	48 - 60 (67)	37 - 57 (69)
LIGHTING	Strip Led 1×3W	Strip Led 1×7 W	Strip Led 1×7 W	Led 2×2,5 W	Led 2×2,5 W	Strip Led 1×7 W	Strip Led 1×7 W	Strip Led 1×7 W	Strip Led 1×7 W
TOTAL ABSORPTION	233 W	277 W	177 W	275 W	265 W	207 W	177 W	177 W	277 W
ENERGY CLASS: EEI	A	A+	A++	A	B	A	A+ (60cm) A++ (80-90cm)	A++	A
PERFECT ALIGNMENT	–	–	–	–	–	–	–	–	–
MODULAR DESIGN	–	–	–	–	–	–	–	–	–
TOTAL INTEGRATION	–	–	–	–	–	–	–	–	–
CONNEX	–	–	–	■	■	–	■	■	■
DROPLESS	–	–	–	dry	–	no drip	–	–	–
AIRMATIC	–	–	–	–	–	–	–	–	–
COMFORT SILENCE	–	■	■	–	–	–	■	■	■
BLACK MATT	–	–	–	■	–	–	–	–	–
CAPTURE BOOSTER	–	■	■	–	–	–	–	–	■
LIGHTING EXPERIENCE	–	–	–	–	–	–	–	–	–
PERIMETRAL ASPIR.	■	–	–	■	–	–	–	■	■
DIMMER LIGHT	–	■	–	■	■	–	■	■	■
TUNE WHITE	–	–	–	–	–	–	–	–	–
MAINTENANCE ALARM	■	■	■	■	■	■	■	■	■
DELAY SWITCH OFF	■	■	■	■	■	–	■	■	■
BRUSHLESS MOTOR	–	–	■	–	–	–	■	■	–


SUPER PLAT	RIFT	RULES	L'ESSENZA	SHIRE	SHY-S	STRIPE	STRIPE A	STRIPE NO DRIP	ADÉLE
80	60 - 90	60 - 90 - 120	60 - 90	60 - 90	60 - 90	60 - 80 - 90	60 - 80 - 90	60 - 80 - 90	60 - 90
black glass, grey glass + cast iron effect	matt black glass	Black glass, Dekton black "sirius", coverable	White glass, Black glass	White glass, black glass	White glass, black glass	black glass, White glass, stainless steel	matt black glass	White glass, black glass	stainless steel + black glass, matt black + black glass
duct-out	duct-out	Filtering, convertible to ducting-out	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out
3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Cap.TC(BL) 3S+B Electr.PB (DEKT/NAKED)	3S+B Capacitive touch control	2S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control
GFI	GFA 9-layer	GFA	GFA	GFA	GFA	GFA	GFA	GFA Anti-condensation	GFA
50 cm	40 cm	50 cm	45 cm	45 cm	45 cm	40 cm	45 cm	45 cm	50 cm
65 cm	50 cm	65 cm	65 cm	65 cm	65 cm	50 cm	55 cm	55 cm	50 cm
190 - 455 (700)	200-450(650) 60cm 210-475(690) 80-90cm	160 - 415 (700)	288 - 603 (691)	275 - 495 (650)	275 - 495 (680)	288 - 603 (757)	245 - 485 (600)	275 -525 (620)	325 - 630 (770)
45-56 (66)	44-58(66) 60cm 46-59(67) 80-90cm	40 - 58 (71)	49 - 65 (68)	52 - 64 (71)	51 - 64 (71)	50 - 65 (69)	46 - 60 (66)	48 - 61 (65)	55 - 69 (74)
Strip Led 1×7 W	Strip Led 1×7 W	Strip Led 1×7W (BL) Strip Led 2×7W (DEKT/NAKED)	Led 2×2,5 W	Led 2×1 W	Led 2×1,5 W	Led 2×2,5 W	Led 2×2,5 W	Strip Led 1×7 W	Strip Led 1×7 W
177 W	177 W	277 W (BL) 280 W (DEKT/NAKED)	255 W	232 W	233 W	265 W	205 W	207 W	277 W
A++	A+ (60cm) A++ (90cm)	A	B	A	A	B	A	A	A
–	–	■	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	–
–	–	■	–	–	–	–	–	–	–
■	■	■	–	–	–	■	–	–	■
–	–	dry	–	–	–	–	–	no drip	–
–	–	–	–	–	–	–	–	–	–
■	■	■	–	–	–	–	–	■	–
–	■	–	–	–	–	–	■	–	■
■	–	–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–	–	■
■	–	–	■	■	■	–	–	–	–
■	■	■	–	–	–	■	–	–	■
–	–	–	–	–	–	–	–	–	–
■	■	■	■	■	■	■	■	■	■
■	■	■	■	■	■	■	–	–	■
■	■	–	–	–	–	–	–	–	–

Comparative table Wall-mounted Hoods

MODEL	BIO	ELEMENT	HAIKU	HAIKU DRY	JOY	LOL	REGULA	SPOT NG	SWEET
SIZE (CM)	90	90 - 120	32 - 60 90 - 120	60 - 90	60 - 90	60 - 90	60 - 90 -120	60 - 90 - 120	85
FINISHING	natural oak + matt white, natural oak + matt black	stainless steel + black glass, Matt black + black glass	white Krion, matt black	matt black + black glass	stainless steel + White glass/black glass/black matt glass	stainless steel, matt white, matt black	stainless steel, matt black	stainless steel	matt white taupe-matt copper peltrox-sage-moon black-embrace-bronze
VERSION	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out / filtering
CONTROLS	3S+2B Electronic Push Button	3S+B Capacitive touch control	3S+2B Electronic Push Button	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Electronic Rotative	3S+B Capacitive touch control	3S Mechanical Push Button	3S+B Capacitive touch control
TYPE OF GREASE FILTER	GFA	GFA	GFA	GFA	GFA	GFA	GFA	GFA	GFA
DISTANCE FROM ELECTRIC HOB	50 cm	50 cm	50 cm	50 cm	50 cm	50 cm	50 cm	50 cm	60 cm
DISTANCE FROM GAS HOB	50 cm	65 cm	65 cm	65 cm	65 cm	65 cm	65 cm	65 cm	70 cm
AIRFLOW MIN-MAX(BOOST) M³/H	205 - 470 (680)	185 - 430 (620)	155 - 375 (690)	200 - 480 (680)	288 - 581 (713)	280 - 540 (620)	260 - 495 (600)	195 - 368	230 - 465 (580)
NOISE LEVEL MIN-MAX(BOOST) DB(A)	44 - 58 (66)	42 - 58 (66)	34 - 51 (63)	41 - 57 (66)	51 - 69 (73)	52 - 67 (70)	50-65 (69)	55 - 62	46 - 61 (66)
LIGHTING	Strip Led 1×7 W	Strip Led 1×7 W	Strip Led 1×7 W	Strip Led 1×7 W	Led 2×2,5 W	Led 2×2,5 W	Strip Led 1×7 W	Led 2×2,5 W (60cm,90cm) Led 3×2,5 W (120cm)	Strip Led 1×7 W
TOTAL ABSORPTION	177 W	177 W	277 W	177 W	265 W	205 W	207 W	140 W (60cm,90cm) 142,5W (120cm)	207 W
ENERGY CLASS: EEI	A++	A+	A	A+	B	A	A	D	A
PERFECT ALIGNMENT	–	–	■	■	–	–	–	–	–
MODULAR DESIGN	■	■	–	–	–	–	–	–	–
TOTAL INTEGRATION	–	–	–	–	–	–	–	–	–
CONNEX	■	■	■	■	–	–	■	–	–
DROPLESS	–	–	–	dry	–	–	–	–	–
AIRMATIC	–	–	–	–	–	–	■	–	–
COMFORT SILENCE	■	■	■	■	–	–	–	–	–
BLACK MATT	■	■	■	■	■	■	■	–	■
CAPTURE BOOSTER	–	–	–	–	–	–	–	–	–
LIGHTING EXPERIENCE	■	–	–	–	–	–	–	–	–
PERIMETRAL ASPIR.	–	■	–	–	–	–	–	–	–
DIMMER LIGHT	■	■	–	■	–	–	■	–	–
TUNE WHITE	■	–	–	–	–	–	–	–	–
MAINTENANCE ALARM	■	■	■	■	■	■	■	■	–
DELAY SWITCH OFF	–	■	■	■	–	–	■	–	–
BRUSHLESS MOTOR	■	■	–	■	–	–	–	–	–


MISSY	TAMAYA RAIL	CORALINE	MENSOLA	MEMPHIS	ORETTA	STONE	TUBE PRO
60 - 90	60 - 90	60 - 90	60 - 90	90	90	Ø 33	Ø 43
stainless steel, black	Anthracite + bronze ladle holder, Ivory + bronze ladle holder	white + unfinished tulipwood frame	white + unfinished tulipwood frame	white + unfinished tulipwood frame	white + unfinished tulipwood frame	stainless steel, White	Stainless steel, matt black, matt white
duct-out	duct-out	duct-out	duct-out	duct-out	duct-out	filtering	duct-out
3S Mechanical Push Button	3S Mechanical Push Button	3S Mechanical Slider	3S Mechanical Slider	3S Mechanical Slider	3S Mechanical Slider	3S Soft light push button	3S Mechanical Push Button
GFA	GFA	GFA	GFA	GFA	GFA	GFA	GFA
50 cm	50 cm	50 cm	50 cm	50 cm	50 cm	50 cm	50 cm
65 cm	65 cm	65 cm	65 cm	65 cm	65 cm	65 cm	65 cm
165 - 395	290 - 435	290 - 435	290 - 435	290 - 435	290 - 435	240 - 559	240 - 603
49 - 68	56 - 65	56 - 65	56 - 65	56 - 65	56 - 65	44 - 67	47 - 68
Led 2×3 W	Led 2×2,5 W	Led 2×3 W	Led 2×3 W	Led 2×3 W	Led 2×3 W	Led 2×2,5 W	Led 2×3 W
96 W	145 W	146 W	146 W	146 W	146 W	180 W	256 W
D	D	D	D	D	D	C	C
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–
–	–	–	–	–	–	–	–

Hoods

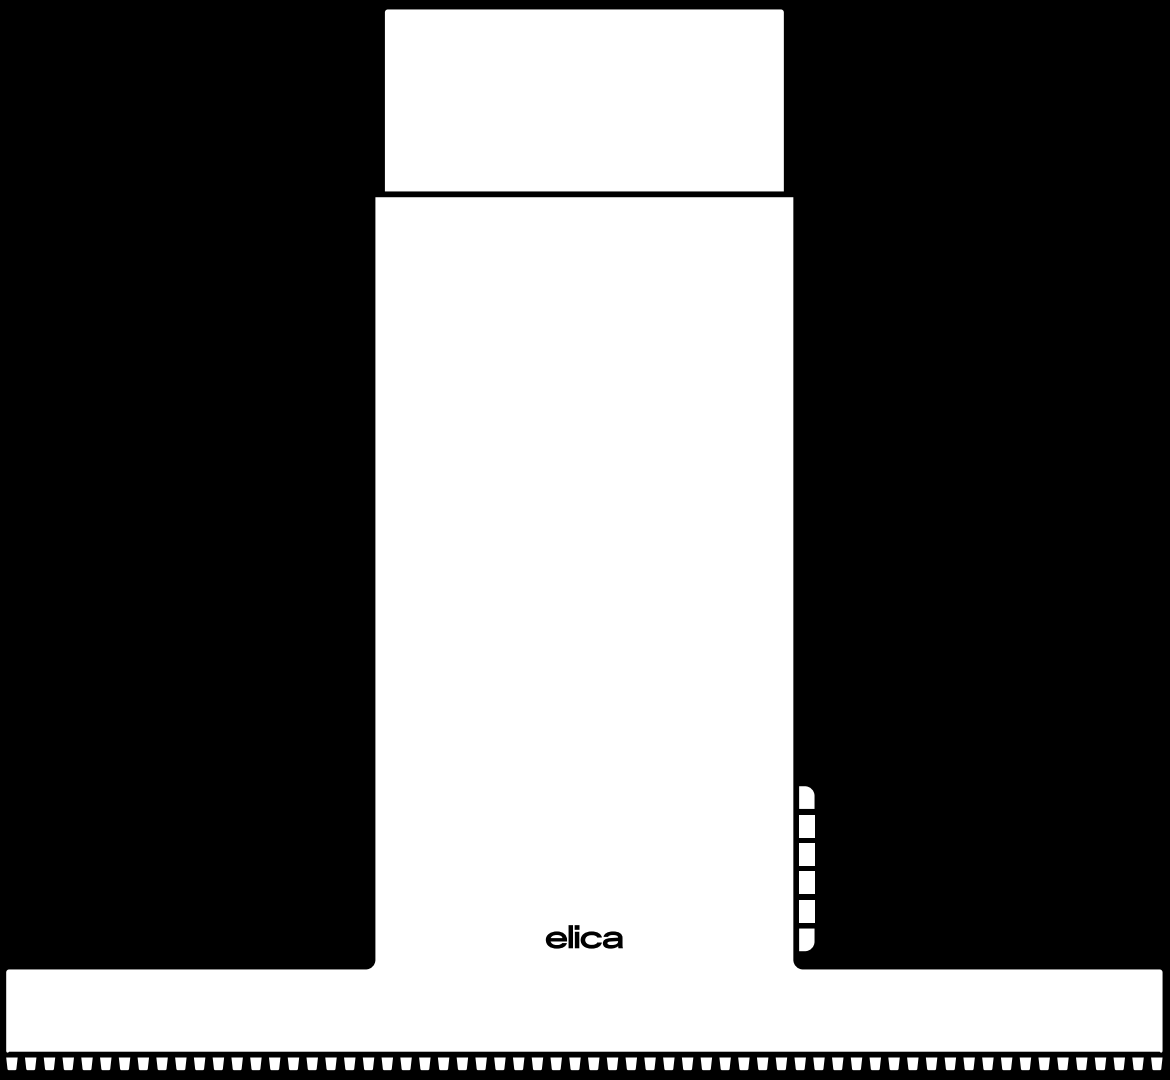

6.3 Island

Whatever the size and type of your kitchen island, we have the right hood for you. Choose from our suspended and ceiling-mounted models: extraction power and distinctive design.

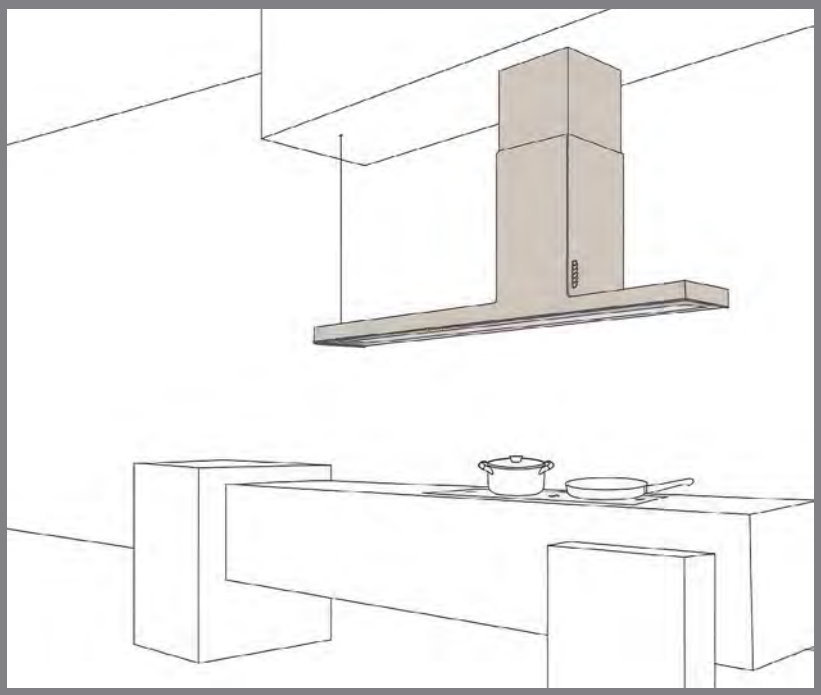

This is a good solution when the kitchen is in the centre of the room, with the hob away from the wall.

Haiku Island

Design Fabrizio Crisà

8 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

CONNEX (*)

Elica App and voice assistant for remote control and maintenance notifications. Connection with the hob to automatically adjust extraction and light.

■


COMFORT SILENCE

Extraction systems designed to limit noise, so you can cook and hold a conversation peacefully.

■

BLACK MATT


Matt black finish offering a minimal and contemporary style, while reducing reflections and simplifying cleaning.

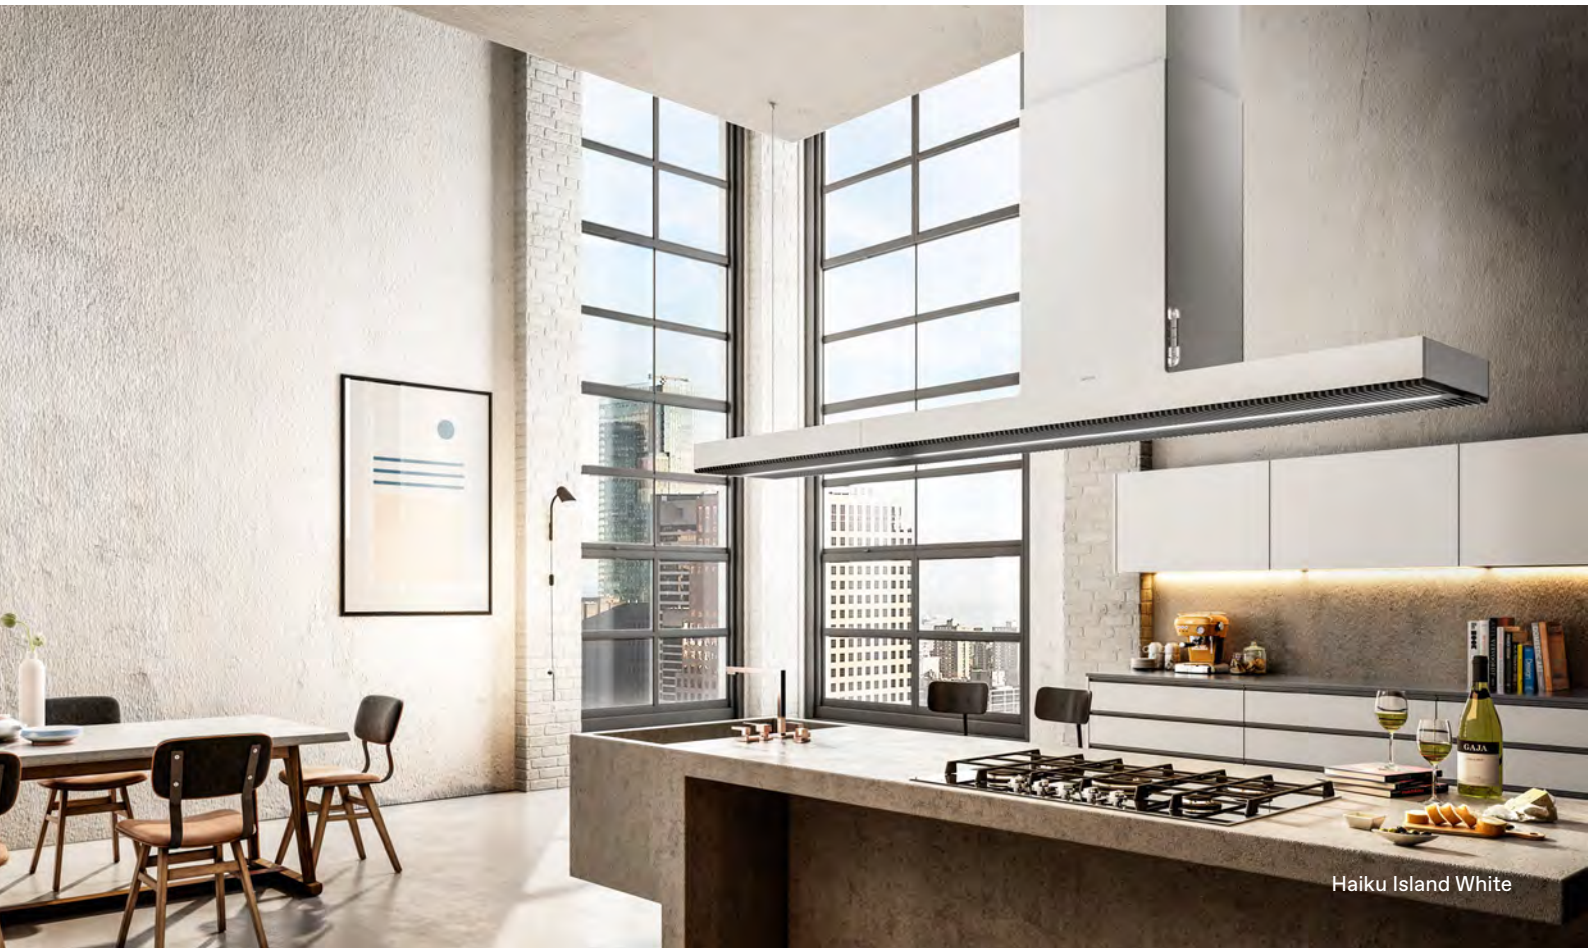

Haiku Island White



DIMENSIONAL DRAWING

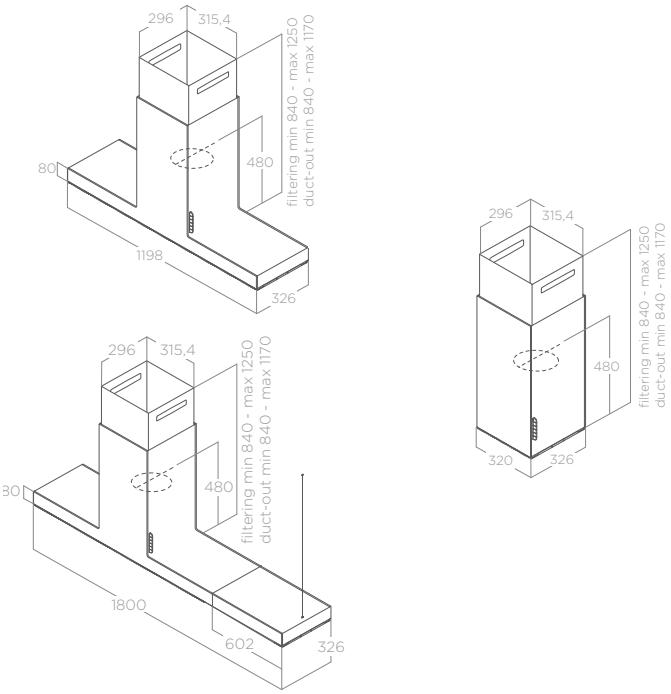

TECHNICAL SPECIFICATIONS

Size	32×32 cm / 120×32 cm / 180×32 cm
Version	Duct-out
Finishing	White Krion, Matt black

- Aluminium grease filter included

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

- Delay Switch Off (*)
- Maintenance Alarm

LIGHTING

Type	Strip Led 1×7 W
Intensity	365 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A

PERFORMANCE

Controls	3S+2B Electronic Push Button
Booster airflow	690 m^3/h
Noise level min-max	34-51 dB(A)
Total absorption	277 W
Energy class	A

MODELS

HAIKU ISLAND WH/A/32	PRF0146289
HAIKU ISLAND WH/A/120	PRF0146290
HAIKU ISLAND WH/A/180	PRF0146291

CONNECTED MODELS

HAIKU ISLAND @ BLMAT/A/32 (*)	PRF0211336
HAIKU ISLAND @ BLMAT/A/120 (*)	PRF0211337
HAIKU ISLAND @ BLMAT/A/180 (*)	PRF0211338





← Haiku Island Matt Black

Haiku Dry Island

Design Fabrizio Crisà

- **BLACK MATT**
- **CONNEX**
- **COMFORT SILENCE**
- **DRY SYSTEM**



8 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

90×32 cm - 120×32 cm
Duct-out
Matt black
▪ Stainless steel grease filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

- Dim Light
- Clean Mode
- Brushless
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

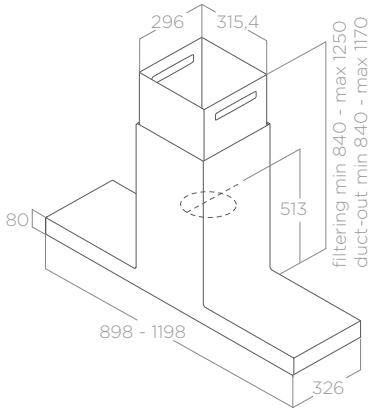

LIGHTING

Type	Strip Led 1×7 W
Intensity	365 (90cm) - 309 (120cm) LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	680 m^3/h
Noise level min-max	41-57 dB(A)
Total absorption	177 W
Energy class	A+

MODELS

HAIKU DRY ISL @ BLRO/A/90×32	PRF0196764
HAIKU DRY ISL @ BLRO/A/120×32	PRF0197409

Bio Island

Design Fabrizio Crisà



- **BLACK MATT**
- **CONNEX**
- **COMFORT SILENCE**
- **MODULAR DESIGN**
- **LIGHTING EXPERIENCE**

7 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

120×53 cm

Duct-out


Natural oak + matt white,
Natural oak + matt black

- Aluminium grease filter included

FEATURES

- Dim Light
- Tune White
- Brushless
- Maintenance Alarm

DIMENSIONAL DRAWING

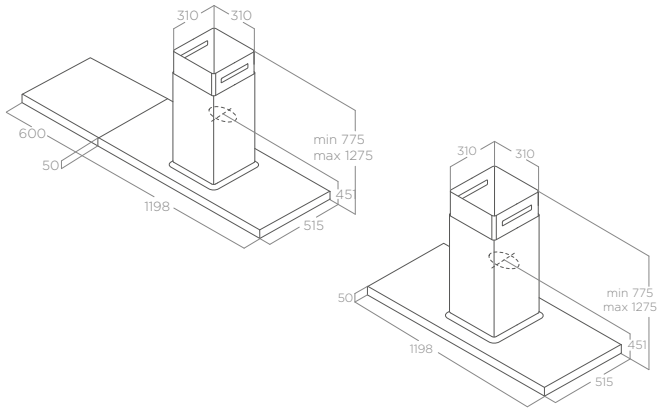

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Strip Led 2×7 W
Intensity	113 LUX
Temperature	2700 - 6500 K

PERFORMANCE

Controls	3S+2B Electronic Push Button
Booster airflow	680 m^3/h
Noise level min-max	44-58 dB(A)
Total absorption	177 W
Energy class	A++

ACCESSORIES

Regenerable charcoal filter	CFC0141725A
First installation HP filtering kit	KIT0160440
Regenerable charcoal filter HP	CFC0140091
Oak island shelf kit 60cm + 2 cables	KIT0120947
Cables shelf kit 2pcs (1,7m)	KIT0120948
White remote control	KIT0184524A
Black remote control	KIT0184525A

MODELS

BIO ISLAND @ WH/A/120×53 ROVERE	PRF0148081B
BIO ISLAND @ BLRO/A/120×53 ROVERE	PRF0200563A

Element Island

Design Fabrizio Crisà



- **BLACK MATT**
- **CONNEX**
- **COMFORT SILENCE**
- **MODULAR DESIGN**

8 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

120×50 cm - 180×50 cm

Duct-out

Stainless steel + black glass
Matt black + black glass

- Aluminium grease filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

- Perimeter Aspiration
- Dim Light
- Clean Mode
- Brushless
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

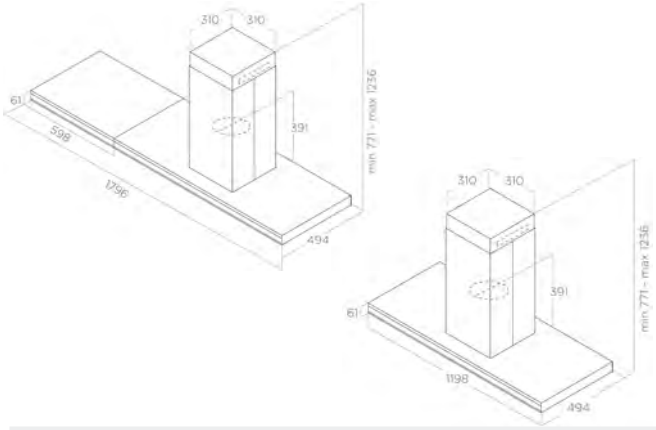

LIGHTING

Type	Strip Led 2×7 W (120cm) - 4×7 W (180cm)
Intensity	253 LUX (120cm) - 393 LUX (180cm)
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	620 m^3/h
Noise level min-max	42-58 dB(A)
Total absorption	184 W
Energy class	A+ (120cm) / A (180cm)

MODELS

ELEMENT ISL @ IXBL/A/120	PRF0194158
ELEMENT ISL @ IXBL/A/180	PRF0194399
ELEMENT ISL @ BLMAT/A/120	PRF0194715
ELEMENT ISL @ BLMAT/A/180	PRF0194719



Element Island Stainless steel

Adéle Island

Design Fabrizio Crisà



- **CONNEX**
- **BLACK MATT**

TECHNICAL SPECIFICATIONS


90x60 cm	
Duct-out	
Stainless steel + black glass, Matt black + black glass	

- Aluminium grease filter included

FEATURES

- Clean Mode
- Dim Light
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

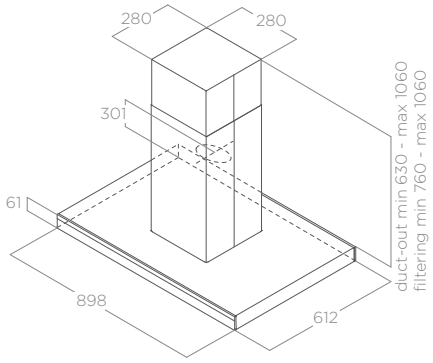

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Strip Led 2×7 W
Intensity	309 LUX
Temperature	3000 K

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Island installation extension kit H15 (false ceiling)	KIT01600

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	770 m³/h
Noise level min-max	55-69 dB(A)
Total absorption	277 W
Energy class	A

MODELS

ADÉLE IS @ BLMAT/A/90×60	PRF0199702
ADÉLE IS @ IXBL/A/90×60	PRF0199703



↑ Adele Island Matt Black

Galaxy Island

Design Fabrizio Crisà



TECHNICAL SPECIFICATIONS


90x45 cm	
Duct-out	
Stainless steel + black glass, Stainless steel + White glass	

- Aluminium grease filter included

FEATURES

- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

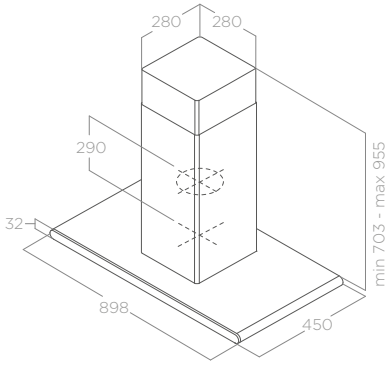

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 4×2,5 W
Intensity	290 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Island installation extension kit H15 (false ceiling)	KIT01600

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	647 m³/h
Noise level min-max	52-69 dB(A)
Total absorption	270 W
Energy class	C

MODELS

GALAXY ISLAND BLIX/A/90×45	PRF0017852B
GALAXY ISLAND WHIX/A/90×45	PRF0019192B

Joy Island



TECHNICAL SPECIFICATIONS


90×61 cm	
Duct-out	
Stainless steel + black glass, Stainless steel + White glass	

- Aluminium grease filter included

FEATURES

- Clean Mode
- Maintenance Alarm

DIMENSIONAL DRAWING

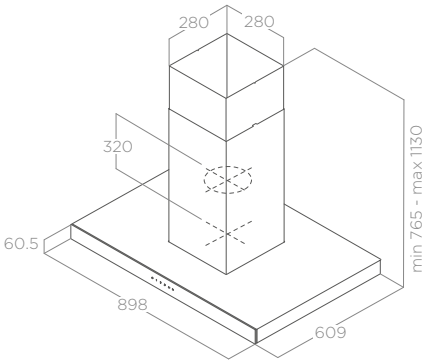

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 4×2,5 W
Intensity	761 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Island installation extension kit H15 (false ceiling)	KIT01600

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	713 m^3/h
Noise level min-max	51-69 dB(A)
Total absorption	270 W
Energy class	B

MODELS

JOY ISLAND BLIX/A/90	PRF0104628A
JOY ISLAND WHIX/A/90	PRF0104629A

Spot Plus Island



TECHNICAL SPECIFICATIONS

90x60 cm

Duct-out

Stainless steel


- Aluminium grease filter included

FEATURES

Delay Switch Off

Maintenance Alarm

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 4×2,5 W
Intensity	761 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+B Electronic push button with LCD
Booster airflow	620 m³/h
Noise level min-max	52-67 dB(A)
Total absorption	210 W
Energy class	A

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Island installation extension kit H15 (false ceiling)	KIT01600

MODELS

SPOT PLUS ISLAND IX/A/90	PRF0097375A

Reef Island



TECHNICAL SPECIFICATIONS

90x60 cm

Duct-out


Stainless steel + glass

- Aluminium grease filter included

FEATURES

Maintenance Alarm

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×2,5 W
Intensity	381 LUX
Temperature	3000 K

PERFORMANCE

Controls	3S+B Electronic push button with display
Booster airflow	600 m³/h
Noise level min-max	48-64 dB(A)
Total absorption	205 W
Energy class	A

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Island installation extension kit H15 (false ceiling)	KIT01600

MODELS

REEF A ISLAND IX/A/90X60	PRF0150290

Tribe Island




TECHNICAL SPECIFICATIONS

90x60 cm	
Duct-out	
Stainless steel + glass	
▪ Aluminium grease filter included	

FEATURES

Maintenance Alarm

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×2,5 W
Intensity	381 LUX
Temperature	3000 K

PERFORMANCE

Controls	3S+B Electronic push button with display
Booster airflow	600 m^3/h
Noise level min-max	48-64 dB(A)
Total absorption	205 W
Energy class	A

ACCESSORIES

Charcoal filter	CFC0141529A
Regenerable charcoal filter	CFC0141725A
Island installation extension kit H15 (false ceiling)	KIT01600

MODELS

TRIBE A ISLAND IX/A/90X60	PRF0150293

Tube Pro Island




■ BLACK MATT

TECHNICAL SPECIFICATIONS

043 cm	
Duct-out	
Stainless steel, Matt black, Matt white	
▪ Aluminium grease filter included	

DIMENSIONAL DRAWING

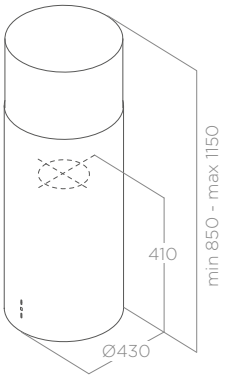

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×3 W
Intensity	457 LUX
Temperature	2700 K

PERFORMANCE

Controls	3S Mechanical Push Button
Booster airflow	603 m^3/h
Noise level min-max	47-68 dB(A)
Total absorption	256 W
Energy class	C

ACCESSORIES


Regenerable charcoal filter	CFC0140423
Island installation extension kit H15 (false ceiling)	KIT01600

MODELS


TUBE PRO ISLAND IX/A/43	PRF0044794B
TUBE PRO ISLAND BL MAT/A/43	PRF0090717B
TUBE PRO ISLAND WH MAT/A/43	PRF0090718B

Technical drawings


Adéle Island

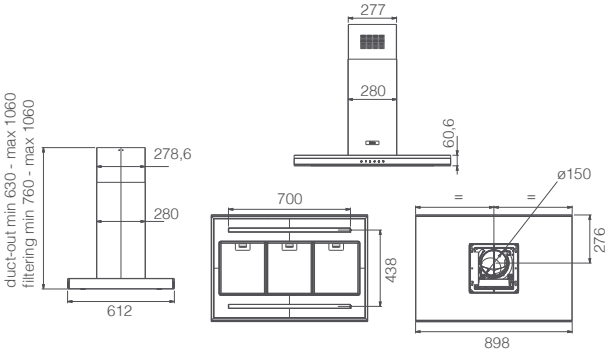


Bio Island

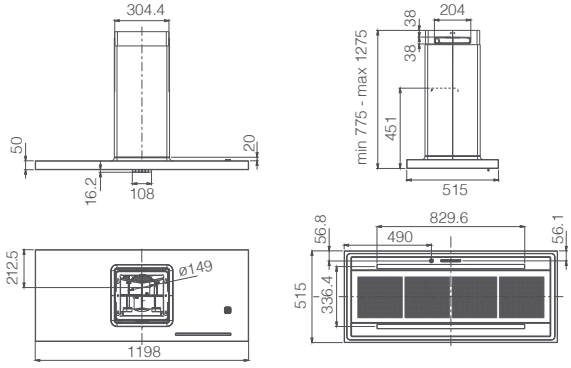


Element Island 120 cm

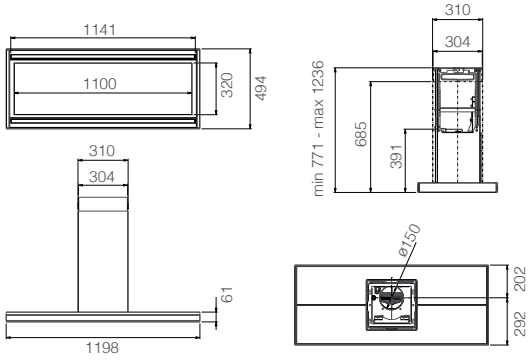


Element Island 180 cm

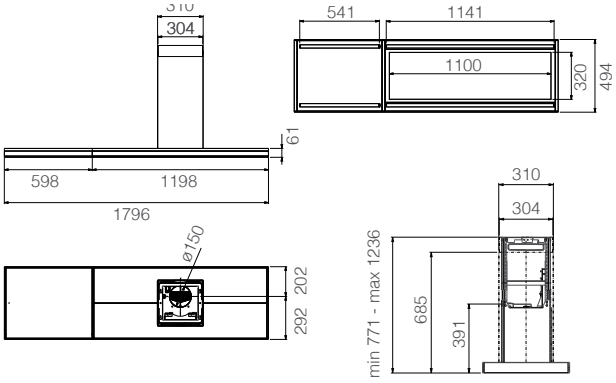


Galaxy Island

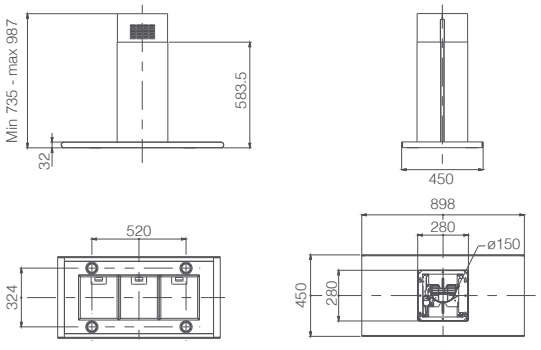


Haiku Island 32

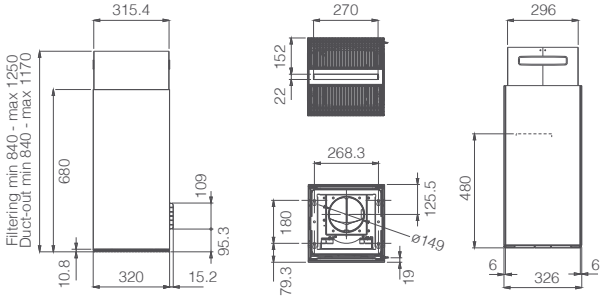


Haiku Island 120

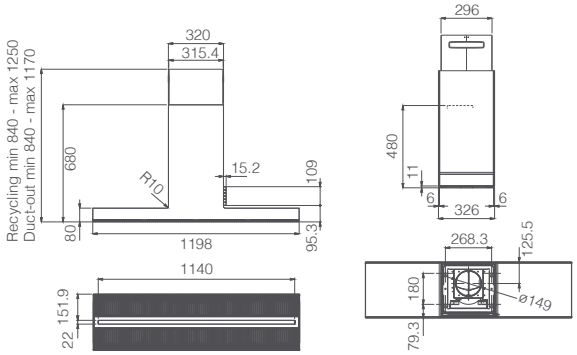


Haiku Island 180

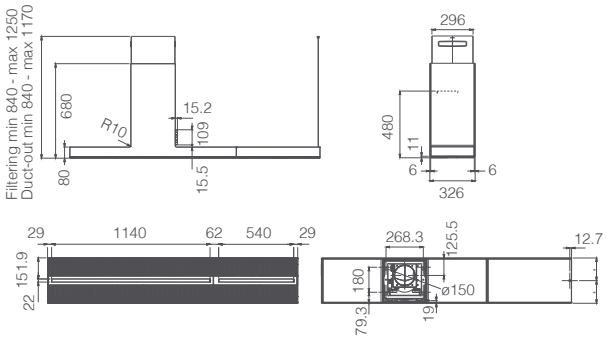


Haiku Dry Island

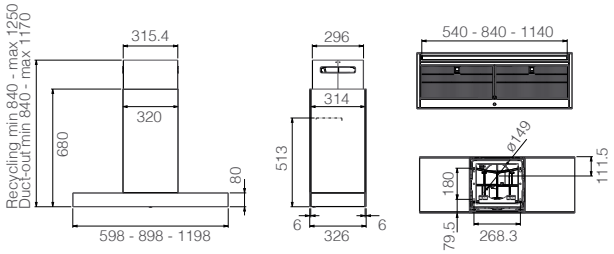


Joy Island

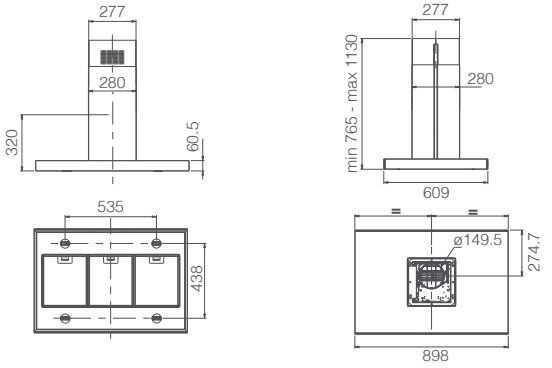


Reef A Island

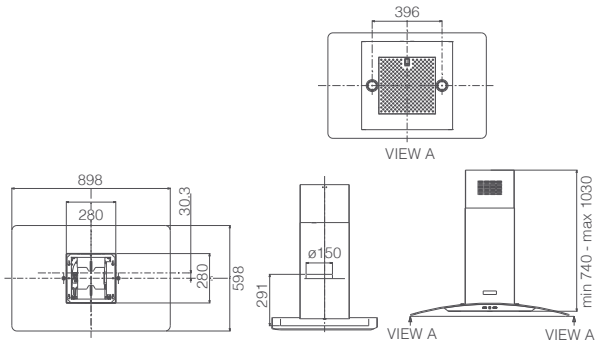


Spot Plus Island

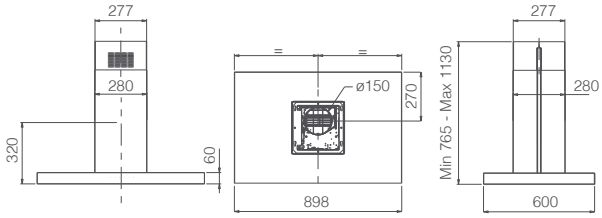

Tribe Island

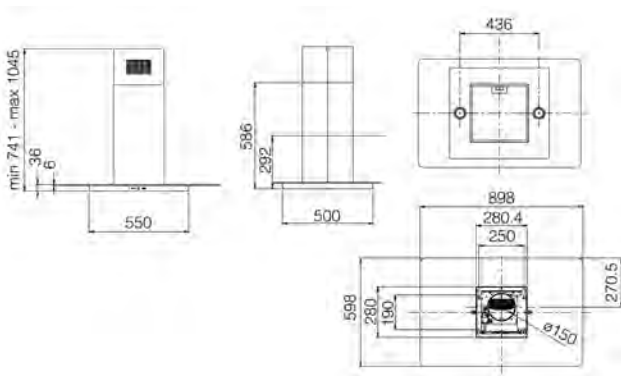

Tube Pro Island

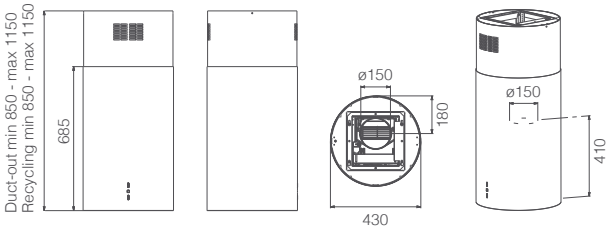


Comparative table Island Hoods

MODEL	ADÉLE ISLAND	BIO ISLAND	ELEMENT ISLAND	GALAXY ISLAND	HAIKU DRY ISLAND	HAIKU ISLAND
SIZE (CM)	90	120	120	90	90 - 120	32 - 120 - 180
FINISHING	stainless steel, matt black	white + wood, matt black + wood	stainless steel, matt black	Stainless steel + black, Stainless steel + White	matt black	white, matt black
VERSION	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out
CONTROLS	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control
TYPE OF GREASE FILTER	GFA	GFA	GFA	GFA	GFA	GFA
DISTANCE FROM ELECTRIC HOB	50 cm	50 cm	50 cm	50 cm	50 cm	50 cm
DISTANCE FROM GAS HOB	65 cm	65 cm	65 cm	65 cm	65 cm	65 cm
AIRFLOW MIN-MAX(BOOST) M^3/H	325 - 630 (770)	205 - 470 (680)	185 - 430 (620)	288 - 559 (647)	200 - 480 (680)	155 - 375 (690)
NOISE LEVEL MIN-MAX(BOOST) DB(A)	55 - 69 (74)	44 - 58 (66)	42 - 58 (66)	52 - 69 (73)	41 - 57 (66)	34 - 51 (63)
LIGHTING	Strip led 2 × 7W	Strip led 2 × 7W	Strip led 2 × 7 W (120cm) 4 × 7W (180cm)	Led 4 × 2,5 W	Strip led 1 × 7W	Strip led 1×7W (32-120cm) 2×7W (180cm)
TOTAL ABSORPTION	277 W	177 W	177 W	270 W	177 W	277 W
ENERGY CLASS: EEI	A	A++	A+	A+	A+	A
MODULAR DESIGN	–	■	■	–	–	–
CONNEX	■	■	■	–	■	■
DROPLESS	–	–	–	–	■	–
COMFORT SILENCE	–	■	■	–	■	■
BLACK MATT	■	■	■	–	■	■
LIGHTING EXPERIENCE	–	■	–	–	–	–
PERIMETRAL ASPIRATION	–	–	■	–	–	–
DIMMER LIGHT	■	■	■	–	–	–
TUNE WHITE	–	■	–	–	–	–
MAINTENANCE ALARM	■	■	■	■	■	■
DELAY SWITCH OFF	■	–	■	■	■	■
BRUSHLESS MOTOR	–	■	■	–	■	–


JOY ISLAND	REEF A ISLAND	SPOT PLUS ISLAND	TRIBE ISLAND	TUBE PRO ISLAND
90	90	90	90	43
black, white	stainless steel	stainless steel	stainless steel	stainless steel, matt black, matt white
duct-out	duct-out	duct-out	duct-out	duct-out
3S+B Capacitive touch control	3S+B Electronic push button with LCD	3S+B Electronic Push Button with display	3S+B Electronic Push Button with display	3S Mechanical push button
GFA	GFA	GFA	GFA	GFA
50 cm	50 cm	50 cm	50 cm	50 cm
65 cm	65 cm	65 cm	65 cm	65 cm
288 - 581 (713)	255 - 500 (600)	280 - 540 (620)	255 - 500 (600)	240 - 603
51 - 61 (73)	48 - 64 (69)	52 - 67 (70)	48 - 64 (69)	47 - 68
Led 4 × 2,5 W	Led 4 × 2,5 W	Led 4 × 2,5W	Led 2 × 2,5W	Led 2 × 3 W
270 W	761 W	210 W	205 W	256 W
B	A	A	A	C
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	■
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
–	–	–	–	–
■	■	■	■	■
–	■	■	–	–
–	–	–	–	–

Hoods

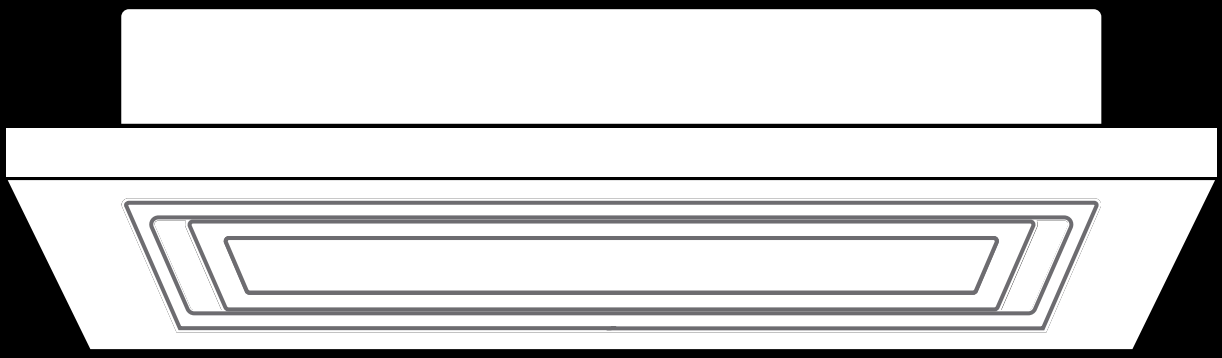

6.4 Ceiling

These hoods are designed to literally disappear into the ceiling, for that “wow” effect. For this reason, they require a plasterboard false ceiling to house duct, fan and some parts of the extraction system.

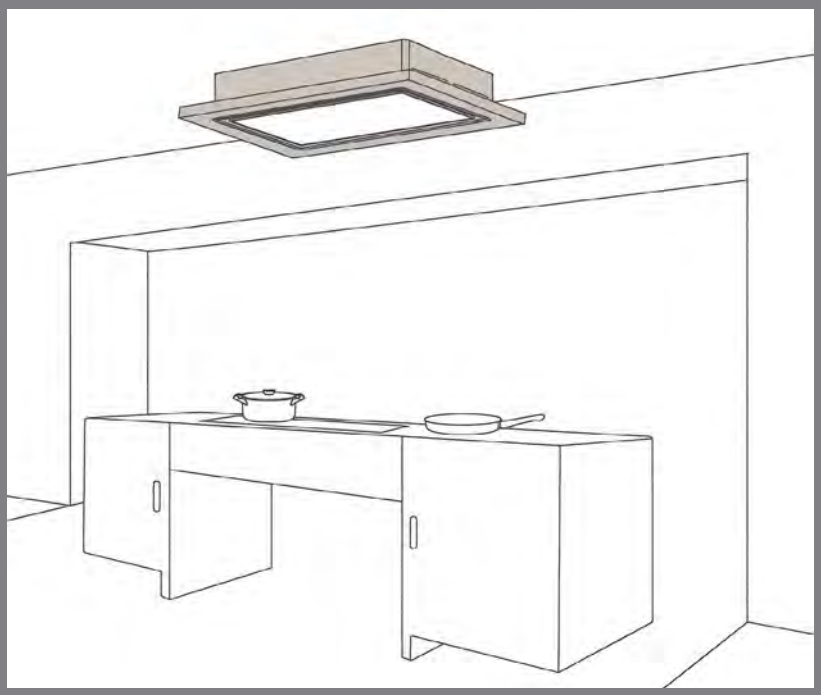

This is a good solution when the kitchen is either in the centre of the room or against a wall. The hood also turns into a lamp and is installed in the false ceiling.

Lullaby

Design Fabrizio Crisà

8 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

CONNEX

Elica App and voice assistant for remote control and maintenance notifications. Connection with the hob to automatically adjust extraction and light.

■

COMFORT SILENCE

Extraction systems designed to limit noise, so you can cook and hold a conversation peacefully.

■

LIGHTING EXPERIENCE


Maximum visual comfort, thanks to the ability to adjust the intensity and temperature of the light.






DIMENSIONAL DRAWING

Duct-out

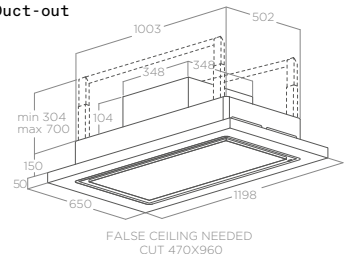

Filtering



TECHNICAL SPECIFICATIONS

Size	120×65 cm
Cut out	96×47 cm (false ceiling)
Version	Duct-out/Filtering
Finishing	WH WOOD: white lacquered wood + stainless steel WOOD: natural oak + White soft touch effect

- Aluminium grease filter included
- Regenerable charcoal filter included
- Remote control included

FEATURES

- Dim Light
- Maintenance Alarm
- Tune White
- Regenerable filter
- Delay Switch Off

MIN DISTANCE FROM HOB

Gas	100 cm
Induction/Radiant	60 cm

LIGHTING

Type	Led Panel 28W
Intensity	1683 LUX (Duct-out) - 1235 LUX (Filtering)
Temperature	2700 - 5000 K

ACCESSORIES

HP regenerable odour ceramic filter	KIT0147861A
White remote control	KIT0184524A
Black remote control	KIT0184525A
White shelf kit	KIT0147859
Oak shelf kit	KIT0147858
On board filtering kit H30	KIT0148449
High performance 1st inst. filtering kit H16-H30 Stainless Steel	KIT0148450A
Regenerable 1st inst. filtering kit H16-H30 Stainless Steel	KIT0167743
High performance 1st inst. filtering kit H16-H30 White	KIT0181126
Regenerable 1st inst. filtering kit H16-H30 White	KIT0181117

PERFORMANCE

	Duct-out	Filtering
Controls	3S + 2B Remote control	3S + 2B Remote control
Booster airflow	770 m^3/h	470 m^3/h
Noise level min-max	40-53 dB(A)	46-64 dB(A)
Total absorption	298 W	568 W
Energy class	A	

MODELS

LULLABY @ WH WOOD/A/120	PRF0167048A
LULLABY @ WH WOOD/F/120	PRF0167049A
LULLABY @ WOOD/A/120	PRF0167046A
LULLABY @ WOOD/F/120	PRF0167047A

Filtering kit - See the relevant section (p. 266)

Illusion

Design Fabrizio Crisà

■

CONNEX

Elica App and voice assistant for remote control and maintenance notifications. Connection with the hob to automatically adjust extraction and light.

■

AIRMATIC

A sensor detects cooking vapours and fumes and automatically adjusts the extraction flow, then switches off when no longer needed.

■

COMFORT SILENCE

Extraction systems designed to limit noise, so you can cook and hold a conversation peacefully.

■

TOTAL INTEGRATION

Customization with the same materials as doors, tops and walls. For visual and material continuity with a coherent and linear aesthetic.

■

SUPER EASY INSTALLATION

Installation in just few simple steps, thanks to the patented S.E.I. system. For perfect alignment and total integration of the mounting surface.

■

LIGHTING EXPERIENCE

Maximum visual comfort, thanks to the ability to adjust the intensity and temperature of the light.

■

BLACK MATT

Matt black finish offering a minimal and contemporary style, while reducing reflections and simplifying cleaning.




Illusion @ Matt Black




DIMENSIONAL DRAWING

H16 - No motor

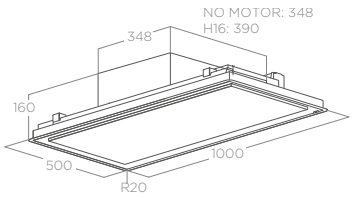

FALSE CEILING CUT: 480X980

H30



FALSE CEILING CUT: 480X980

TECHNICAL SPECIFICATIONS

Size	100×50 cm
Cut out	98×48 cm (false ceiling)
Version	Duct-out
Finishing	Matt white + matt white frame, Coverable with drywall (not included) + stainless steel frame, Matt black + matt black frame

- Aluminium grease filter included
- Remote control included

MIN DISTANCE FROM HOB

Gas	70 cm (H16-H30)
Induction/Radiant	65 cm (H16) - 60 cm (H30)

LIGHTING

Type	Led Panel 28W
Intensity	563 LUX
Temperature	2700 - 5000 K

PERFORMANCE

	H16	H30
Controls	3S + 2B Remote control	3S + 2B Remote control
Booster airflow	720 m^3/h	770 m^3/h
Noise level min-max	51-68 dB(A)	40-53 dB(A)
Total absorption	303 W	298 W
Energy class	A	

FEATURES

- Dim Light
- Tune White
- Delay Switch Off
- Maintenance Alarm

ACCESSORIES

On board filtering kit H30	KIT0148449
High performance 1st inst. filtering kit H16-H30 Stainless Steel	KIT0148450A
Regenerable 1st inst. filtering kit H16-H30 Stainless Steel	KIT0167743
High performance 1st inst. filtering kit H16-H30 White	KIT0181126
Regenerable 1st inst. filtering kit H16-H30 White	KIT0181117
High performance 1st inst filtering kit H16-H30 Black	KIT0181124
Regenerable 1st inst. filtering kit H16-H30 Black	KIT0180993
White remote control	KIT0184524A
Black remote control	KIT0184525A
Internal remote motor	KIT0184296
External remote motor (wall)	KIT0184135
External remote motor (roof)	KIT0147881
External remote motor (inclined roof)	KIT0147882
Extension lead for remote motor	KIT0161392

MODELS

ILLUSION @ H16 PAINT/A/100	PRF0147726C
ILLUSION @ H16 WH/A/100	PRF0147727C
ILLUSION @ H16 BL MAT/A/100	PRF0172645C
ILLUSION @ H30 PAINT/A/100	PRF0146250C
ILLUSION @ H30 WH/A/100	PRF0146251C
ILLUSION @ H30 BL MAT/A/100	PRF0172646C
ILLUSION @ NO MOTOR PAINT/A/100	PRF0146252B
ILLUSION @ NO MOTOR WH/A/100	PRF0146253B
ILLUSION @ NO MOTOR BL MAT/A/100	PRF0172647B

Remote motors - See the relevant section (p. 328)
Filtering kit - See the relevant section (p. 266)

Skydome

Design Fabrizio Crisà

■

CONNEX

Elica App and voice assistant for remote control and maintenance notifications. Connection with the hob to automatically adjust extraction and light.

■

AIRMATIC

A sensor detects cooking vapours and fumes and automatically adjusts the extraction flow, then switches off when no longer needed.

■

COMFORT SILENCE

Extraction systems designed to limit noise, so you can cook and hold a conversation peacefully.

■

SUPER EASY INSTALLATION


Installation in just few simple steps, thanks to the patented S.E.I. system. For perfect alignment and total integration of the mounting surface.

■

LIGHTING EXPERIENCE


Maximum visual comfort, thanks to the ability to adjust the intensity and temperature of the light.



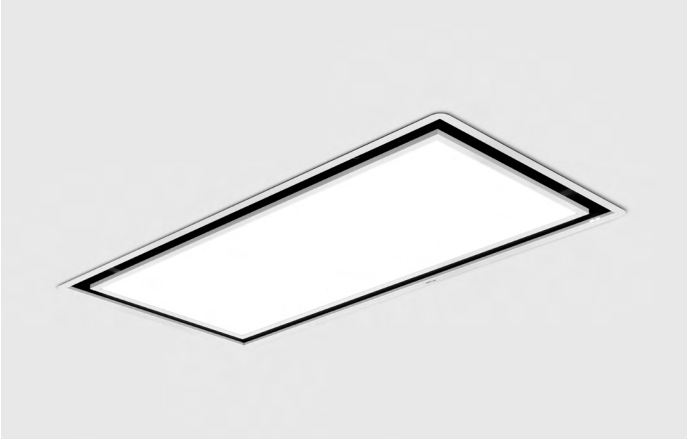


DIMENSIONAL DRAWING

H16 - No motor

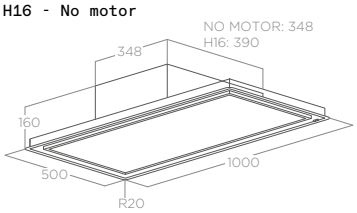

FALSE CEILING CUT: 480X980

H30



FALSE CEILING CUT: 480X980

TECHNICAL SPECIFICATIONS

Size	100×50 cm
Cut out	98×48 cm (false ceiling)
Version	Duct-out
Finishing	White frame

- Aluminium grease filter included
- Remote control included

FEATURES

- Dim Light
- Delay Switch Off
- Tune White
- Maintenance Alarm

MIN DISTANCE FROM HOB

Gas	100 cm (H16-H30)
Induction/Radiant	65 cm (H16) - 60 cm (H30)

LIGHTING

Type	Led Panel 28W
Intensity	1459 LUX
Temperature	2700 - 5000 K

ACCESSORIES

On board filtering kit H30	KIT0148449
High performance 1st inst. filtering kit H16-H30 Stainless Steel	KIT0148450A
Regenerable 1st inst. filtering kit H16-H30 Stainless Steel	KIT0167743
High performance 1st inst. filtering kit H16-H30 White	KIT0181126
Regenerable 1st inst. filtering kit H16-H30 White	KIT0181117
White remote control	KIT0184524A
Black remote control	KIT0184525A
Internal remote motor	KIT0184296
External remote motor (wall)	KIT0184135
External remote motor (roof)	KIT0147881
External remote motor (inclined roof)	KIT0147882
Extension lead for remote motor	KIT0161392

PERFORMANCE

	H16	H30
Controls	3S + 2B Remote control	3S + 2B Remote control
Booster airflow	720 m^3/h	770 m^3/h
Noise level min-max	51-68 dB(A)	40-53 dB(A)
Total absorption	303 W	298 W
Energy class	A	

MODELS

SKYDOME @ NO MOTOR A/100	PRF0146230B
SKYDOME @ H16 A/100	PRF0147735C
SKYDOME @ H30 A/100	PRF0146232C

Remote motors - See the relevant section (p. 328)
Filtering kit - See the relevant section (p. 266)

Hilight Glass

Design Fabrizio Crisà

■

COMFORT SILENCE

Extraction systems designed to limit noise, so you can cook and hold a conversation peacefully.

■

SUPER EASY INSTALLATION

Installation in just few simple steps, thanks to the patented S.E.I. system. For perfect alignment and total integration of the mounting surface.

■

LIGHTING EXPERIENCE


Maximum visual comfort, thanks to the ability to adjust the intensity and temperature of the light.






DIMENSIONAL DRAWING

H16 - No motor

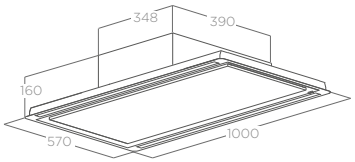

FALSE CEILING CUT: 550X980

H30



FALSE CEILING CUT: 550X980

TECHNICAL SPECIFICATIONS

Size	100×57 cm
Cut out	98×55 cm (false ceiling)
Version	Duct-out
Finishing	White glass + white frame

- Aluminium grease filter included
- Remote control included

FEATURES

- Dim Light
- Delay Switch Off
- Tune White
- Maintenance Alarm

MIN DISTANCE FROM HOB

Gas	70 cm (H16-H30)
Induction/Radiant	65 cm (H16) - 60 cm (H30)

LIGHTING

Type	Strip Led 2×14 W
Intensity	563 LUX
Temperature	2700 - 5000 K

ACCESSORIES

On board filtering kit H30	KIT0148449
High performance 1st inst. filtering kit H16-H30 Stainless Steel	KIT0148450A
Regenerable 1st inst. filtering kit H16-H30 Stainless Steel	KIT0167743
High performance 1st inst. filtering kit H16-H30 White	KIT0181126
Regenerable 1st inst. filtering kit H16-H30 White	KIT0181117
White remote control	KIT0184524A
Black remote control	KIT0184525A
Internal remote motor	KIT0184296
External remote motor (wall)	KIT0184135
External remote motor (roof)	KIT0147881
External remote motor (inclined roof)	KIT0147882
Extension lead for remote motor	KIT0161392

PERFORMANCE

	H16	H30
Controls	3S + 2B Remote control	3S + 2B Remote control
Booster airflow	720 m^3/h	770 m^3/h
Noise level min-max	51-68 dB(A)	40-53 dB(A)
Total absorption	303 W	298 W
Energy class	A	

MODELS

HILIGHT GLASS NO MOTOR WH/A/100	PRF0146248
HILIGHT GLASS H16 WH/A/100	PRF0167044A
HILIGHT GLASS H30 WH/A/100	PRF0146246A

Remote motors - See the relevant section (p. 328)
Filtering kit - See the relevant section (p. 266)

Hilight-X

Design Fabrizio Crisà

■

COMFORT SILENCE

Extraction systems designed to limit noise, so you can cook and hold a conversation peacefully.

■

SUPER EASY INSTALLATION

Installation in just few simple steps, thanks to the patented S.E.I. system. For perfect alignment and total integration of the mounting surface.

■

BLACK MATT

Matt black finish offering a minimal and contemporary style, while reducing reflections and simplifying cleaning.




Illusion Stainless Steel




DIMENSIONAL DRAWING

H16 - No motor

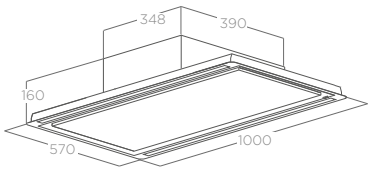

FALSE CEILING CUT: 550X980

H30



FALSE CEILING CUT: 550X980

TECHNICAL SPECIFICATIONS

Size	100×57 cm
Cut out	98×55 cm (false ceiling)
Version	Duct-out
Finishing	Stainless steel, Matt white, Matt black

- Aluminium grease filter included
- Remote control included

FEATURES

- Dim Light
- Delay Switch Off
- Maintenance Alarm

MIN DISTANCE FROM HOB

Gas	70 cm (H16-H30)
Induction/Radiant	65 cm (H16) - 60 cm (H30)

LIGHTING

Type	Strip Led 2×7 W
Intensity	281 LUX (H16) - 563 LUX (H30)
Temperature	3500 K

ACCESSORIES

On board filtering kit H30	KIT0148449
High performance 1st inst. filtering kit H16-H30 Stainless Steel	KIT0148450A
Regenerable 1st inst. filtering kit H16-H30 Stainless Steel	KIT0167743
High performance 1st inst. filtering kit H16-H30 White	KIT0181126
Regenerable 1st inst. filtering kit H16-H30 White	KIT0181117
White remote control	KIT0184524A
Black remote control	KIT0184525A
Internal remote motor	KIT0184296
External remote motor (wall)	KIT0184135
External remote motor (roof)	KIT0147881
External remote motor (inclined roof)	KIT0147882
Extension lead for remote motor	KIT0161392

PERFORMANCE

	H16	H30
Controls	3S + 2B Remote control	3S + 2B Remote control
Booster airflow	720 m^3/h	770 m^3/h
Noise level min-max	51-68 dB(A)	40-53 dB(A)
Total absorption	189 W	298 W
Energy class	A+	A

MODELS

HILIGHT-X NO MOTOR IX/A/100	PRF0163523
HILIGHT-X H16 IX/A/100	PRF0167045A
HILIGHT-X H30 IX/A/100	PRF0163520A
HILIGHT-X H16 WH/A/100	PRF0173442A
HILIGHT-X H30 WH/A/100	PRF0173444A
HILIGHT-X H16 BL MAT/A/100	PRF0173443A
HILIGHT-X H30 BL MAT/A/100	PRF0173445A

Remote motors - See the relevant section (p. 328)
Filtering kit - See the relevant section (p. 266)

Cloud Seven

Design Fabrizio Crisà

■

COMFORT SILENCE

Extraction systems designed to limit noise, so you can cook and hold a conversation peacefully.




Cloud Seven Duct-out




DIMENSIONAL DRAWING

Duct-out



FALSE CEILING CUT: 480X880

Filtering

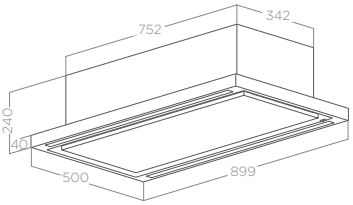

TECHNICAL SPECIFICATIONS

Size	90×50 cm
Cut out	88×48 cm (false ceiling)
Version	Duct-out/Filtering
Finishing	Stainless steel + white, Black

- Aluminium grease filter included
- Regenerable charcoal filter included (*)
- Remote control included

FEATURES

- Delay Switch Off
- Maintenance Alarm
- Regenerable filter

MIN DISTANCE FROM HOB

Gas	70 cm
Induction/Radiant	60 cm

LIGHTING

Type	Strip Led 2×7 W
Intensity	393 LUX
Temperature	3500 K

ACCESSORIES

Regenerable charcoal filter	CFC0140426
Regenerable charcoal filter (filtering kit)	KIT0168748
Charcoal filter high performance for decorative kit	KIT0168749
High performance 1st inst. filtering kit H16-H30 Stainless Steel	KIT0148450A
Regenerable 1st inst. filtering kit H16-H30 Stainless Steel	KIT0167743
High performance 1st inst. filtering kit H16-H30 White	KIT0181126
Regenerable 1st inst. filtering kit H16-H30 White	KIT0181117
White remote control	KIT0184524A
Black remote control	KIT0184525A

PERFORMANCE

	Duct-out	Filtering
Controls	3S + 2B Remote control	3S + 2 Remote control
Booster airflow	770 m^3/h	570 m^3/h
Noise level min-max	43-60 dB(A)	52-68 dB(A)
Total absorption	284 W	214 W
Energy class	A	


MODELS

CLOUD SEVEN IX/F/90 (*)	PRF0141953
CLOUD SEVEN IX/A/90	PRF0142094A
CLOUD SEVEN BL/F/90	PRF0186953
CLOUD SEVEN BL/A/90 (*)	PRF0186952


Filtering kit - See the relevant section (p. 266)

Technical drawings


Cloud Seven (Duct-out)

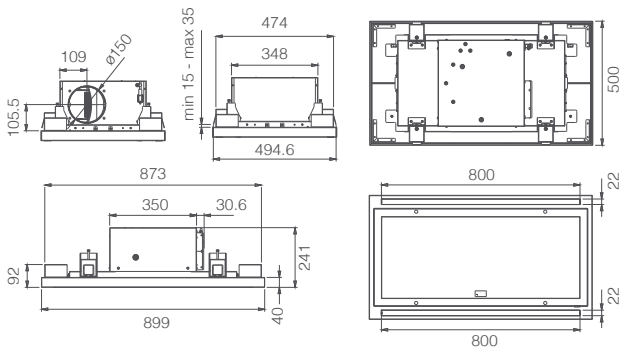


Cloud Seven (Filtering)

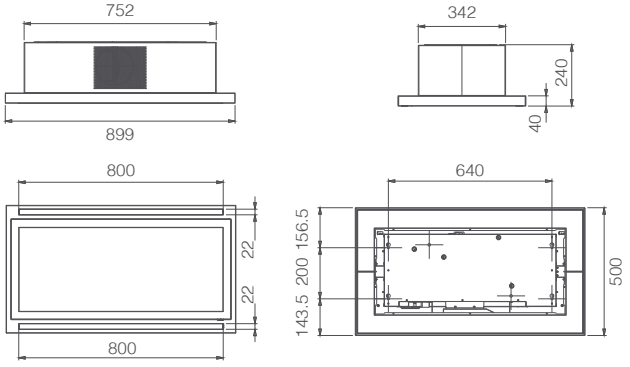


Hilight Glass / Hilight-X (H16)

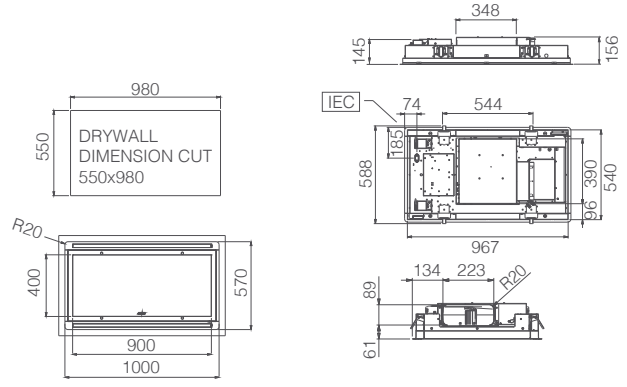


Hilight Glass / Hilight-X (H30)

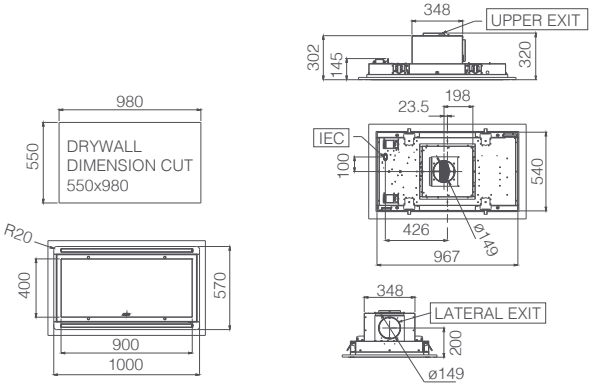


Hilight Glass / Hilight-X (No Motor)

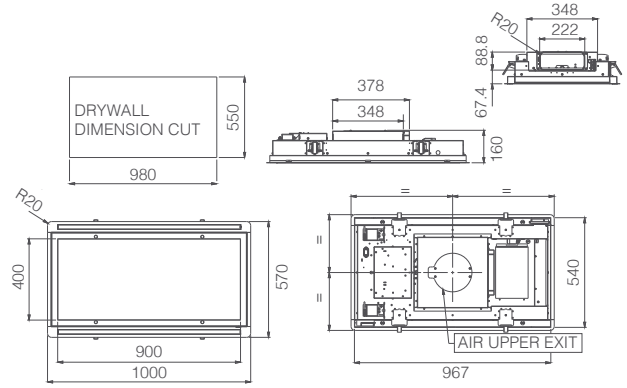


Illusion (H16)

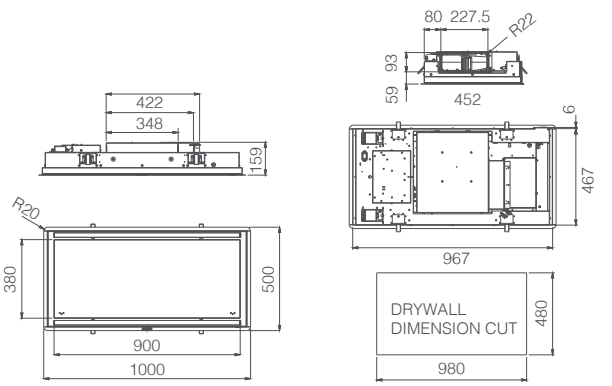


Illusion (H30)

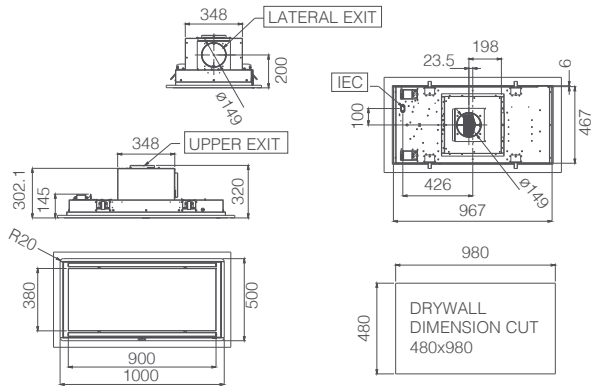


Illusion (No Motor)

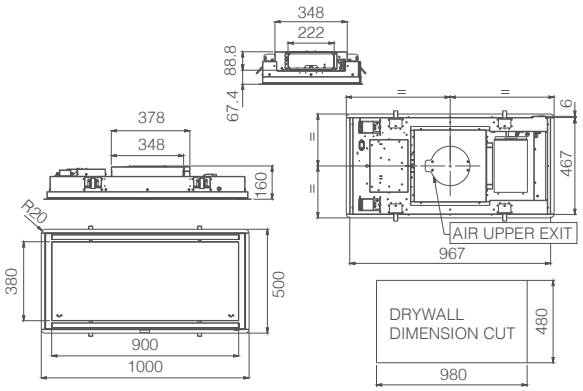


Lullaby (Duct-out)

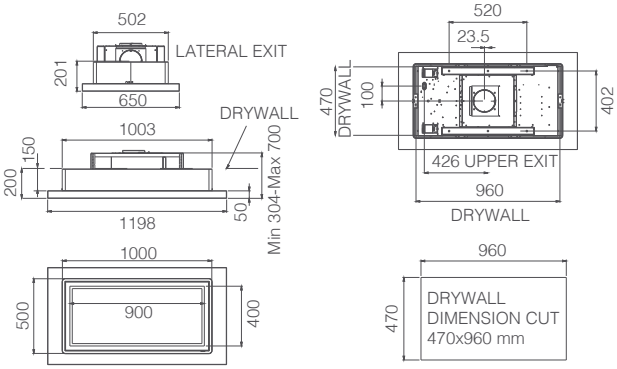


Lullaby (Filtering)

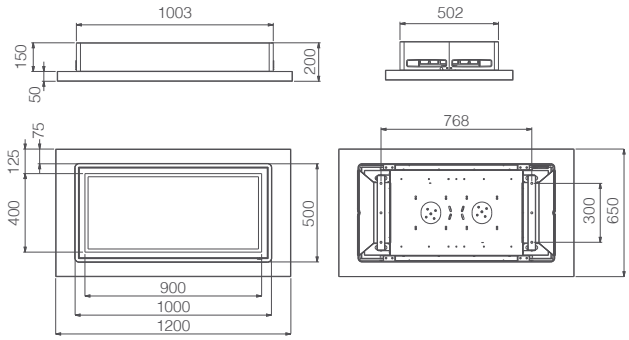


Skydome (H16)

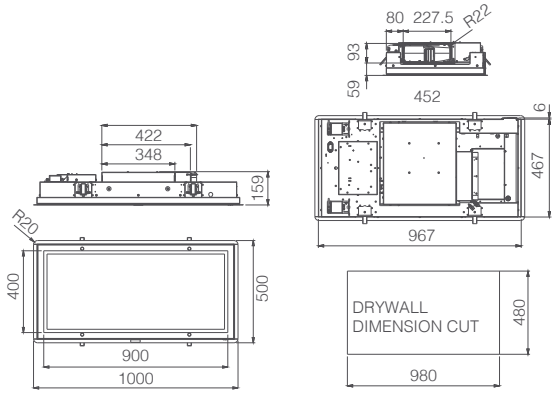

Skydome (H30)

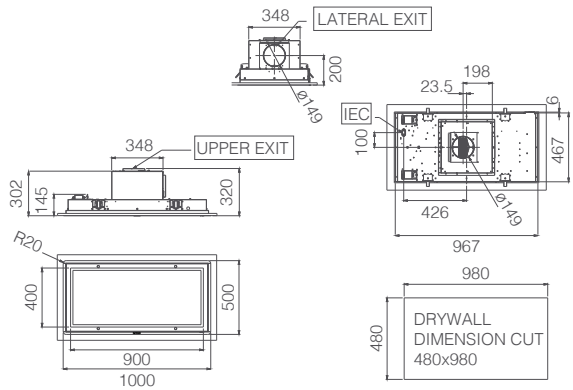

Skydome (No Motor)

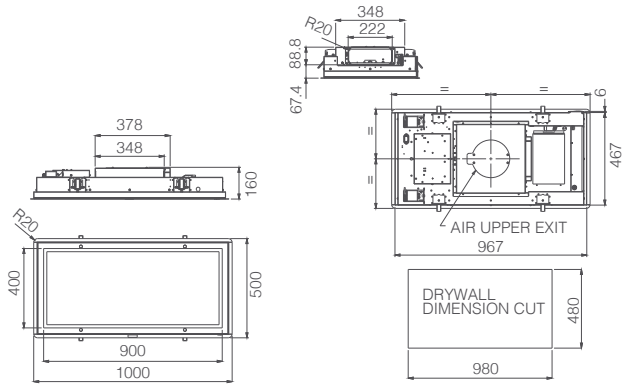

Carbon Filter Kits.

First installation filtering kit

Sold separately to convert a duct out model into filtering mode.

High Performance filtering kit

It contains a regenerable high performance charcoal filter KIT0168749 and an air outlet panel.

KIT0148450A
Stainless steel



KIT0181124
Black



KIT0181126
White



Regenerable filtering kit

It contains a regenerable high performance charcoal filter KIT0168748 and an air outlet panel.

KIT0167743
Stainless steel



KIT0180993
B




KIT0181117
White



Dimensional drawing of the air outlet panel included in the High-Performance and Regenerable filter kits.

KIT0148450A
KIT0181124
KIT0181126
KIT0167743
KIT0180993
KIT0181117

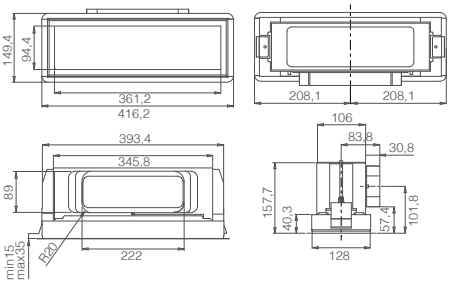

“On board” filtering kit H30

Filtering Kit only to be used for H30 installations - comes with 3 filters to be fitted directly on the product.

KIT0148449



Spare parts for regenerable odour filters

To be purchased if you have a filtering hood.

KIT0147861A
Ceramic filter
odour-removing



CFC0140426
Regenerable Charcoal
filter



KIT0148449
“On Board” filtering
kit H30



KIT0168748
Regenerable Charcoal
filter



KIT0168749
High performance
Charcoal filter



Buy on Elica Shop


	FILTERING EFFICIENCY	SKYDOME	HILIGHT GLASS	ILLUSION	LULLABY DUCT-OUT	LULLABY FILTERING	CLOUD SEVEN DUCT-OUT	CLOUD SEVEN FILTERING
KIT0148450A KIT0181124 KIT0181126	80%	■	■	■	■	–	■	–
KIT0167743 KIT0180993 KIT0181117	60%	■	■	■	■	–	■	–
KIT0148449	60%	–	–	–	■	–	–	–
KIT0168749	80%	■	■	■	■	–	■	–
CFC0140426	60%	–	–	–	–	–	–	■
KIT0168748	60%	■	X	■	■	–	■	–
KIT0147861A	80%	–	–	–	–	■	–	–

S.E.I. System.


This appliance is quick and easy to install thanks to the patented Super Easy Installation system, a solution designed to preserve the integrity of the false ceiling.

Available for models: Illusion, Skydome, Hilight Glass and Hilight-X.


Bring the product to the compartment in the false ceiling.

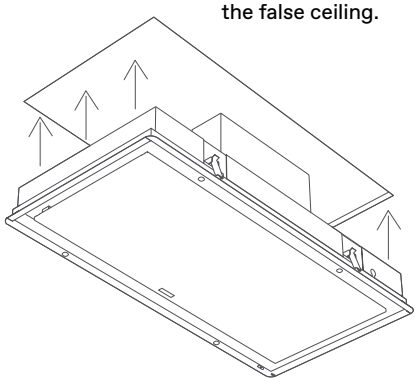

Insert the product into the opening. Tighten the screws to secure the product.

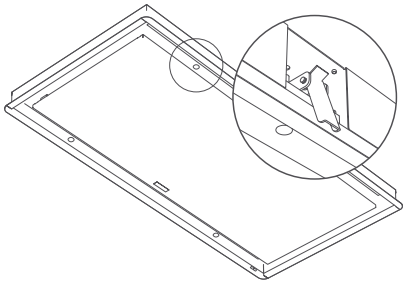

The brackets hold the product in the false ceiling.

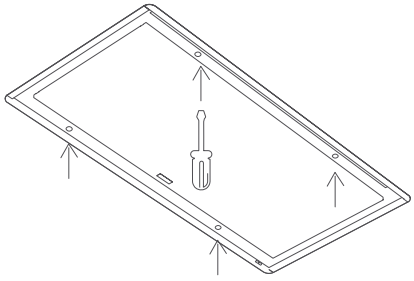

Space-saving Installation

The powerful extraction core is tucked into the false ceiling, while providing proper fume capture. Designed to suit different types of installation, these Elica hoods are also ideal for lower ceilings, as they are available in two heights: 30 cm or 16 cm.


H30 Installation





H16 Installation








Lighting accessories.

In most models (Lullaby, Illusion, Skydome en Hilight Glass), you can adjust the brightness and the hue of white to suit the time of day or your needs. Cool white light is perfect for cooking; warm white light creates a warm and cozy atmosphere.
Like a proper chandelier, you can operate the hood via a wall switch or a remote control, which can be attached to the wall thanks to its magnet.
Furthermore, Elica ceiling hoods can be connected to any type of accessory lamp available on the market switchable with hoods controls.

Comparative table Ceiling Hoods

MODEL	CLOUD SEVEN	HILIGHT GLASS	HILIGHT-X	ILLUSION	LULLABY	SKYDOME
SIZE (CM)	90	100	100	100	120	100
FINISHING	stainless steel, black	white	stainless steel, white, matt black	paintball, white, matt black	wood, white	white
VERSION	duct-out / filtering	duct-out	duct-out	duct-out	duct-out / filtering	duct-out
CONTROLS	3S+2B Remote control	3S+2B Remote control	3S+2B Remote control	3S+2B Remote control	3S+2B Remote control	3S+2B Remote control
TYPE OF GREASE FILTER	GFA	GFA	GFA	GFA	GFA	GFA
DISTANCE FROM ELECTRIC HOB	60 cm	H30-60 cm H16-65 cm	H30-60 cm H16-65 cm	H30-60 cm H16-65 cm	60 cm	H30-60 cm H16-65 cm
DISTANCE FROM GAS HOB	70 cm	H30-60 cm H16-65 cm	H30-60 cm H16-65 cm	H30-60 cm H16-65 cm	100 cm	H30-100 cm H16-100 cm
AIRFLOW MIN-MAX(BOOST) M^3/H	235 - 460 (770)	H30: 200 - 465 (770) H16: 275 - 540 (720)	H30: 200 - 465 (770) H16: 275 - 540 (720)	H30: 200 - 465 (770) H16: 275 - 540 (720)	200-465 (770)	H30: 200 - 465 (770) H16: 275 - 540 (720)
NOISE LEVEL MIN-MAX(BOOST) DB(A)	43 - 60 (71)	H30: 40 - 53 (66) H16: 51 - 68 (74)	H30: 40 - 53 (66) H16: 51 - 68 (74)	H30: 40 - 53 (66) H16: 51 - 68 (74)	40 - 53 (66)	H30: 40 - 53 (66) H16: 51 - 68 (74)
LIGHTING	Strip led 2 × 7W	Strip led 2 × 14W	Strip led 2 × 7W	Strip led 2 × 14W	Led panel 28W	Led panel 28W
TOTAL ABSORPTION	284 W	303 W	189 W	303 W	298 W	303 W
ENERGY CLASS: EEI	A	A	A+ (H16)	A	A	–
TOTAL INTEGRATION	–	–	–	■	–	■
CONNEX	–	–	–	■	■	■
AIRMATIC	–	–	–	■	–	■
COMFORT SILENCE	■	■	■	■	■	■
BLACK MATT	–	–	■	■	–	–
LIGHTING EXPERIENCE	–	■	–	■	■	■
SUPER EASY INSTALLATION	–	■	■	■	–	■
PERIMETRAL ASPIR.	■	■	■	■	■	■
DIMMER LIGHT	–	■	■	■	■	■
TUNE WHITE	–	■	–	■	■	■
MAINTENANCE ALARM	■	■	■	■	■	■
DELAY SWITCH OFF	■	■	■	■	■	■
BRUSHLESS MOTOR	–	■	■	■	■	■
EXTERNAL MOTOR	–	■	■	■	–	■

Hoods

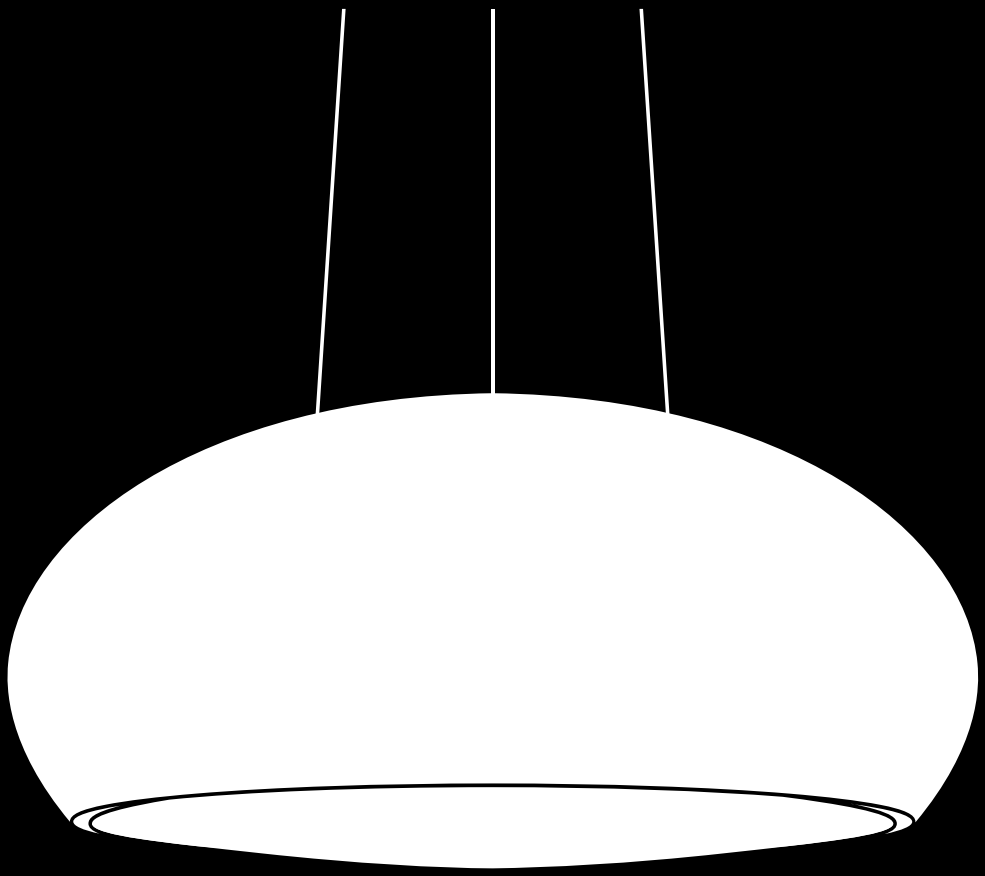

6.5 Suspended

Island, chandelier, filtering or duct-out mode, minimalist, traditional or sophisticated design: Elica suspended hoods offer endless variations. Choose yours.



This is the solution for those seeking a chandelier-style hood, to be installed in the ceiling.

Interstellar

Design Fabrizio Crisà



- **COMFORT SILENCE**
- **WIDE LIGHT DIMMING**

2 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

Ø67 cm	
Filtering	
Glossy Stainless steel + glass, Glossy Stainless steel + black glass	

- Aluminium grease filter included
- Regenerable charcoal filter included
- Remote control included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

- Dim Light
- Brushless
- Maintenance Alarm
- Delay Switch Off
- Regenerable filter

DIMENSIONAL DRAWING

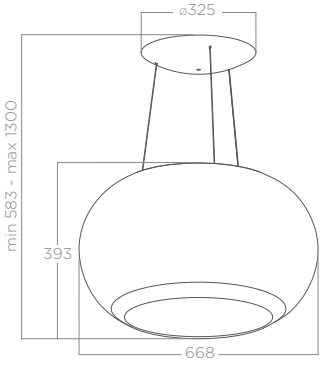

LIGHTING

Type	Led 9 W
Intensity	685 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	460 m^3/h
Noise level min-max	46-53 dB(A)
Total absorption	134 W
Energy class	A

ACCESSORIES

Regenerable charcoal filter HP	CFC0140053
Regenerable charcoal filter	CFC0140090
White remote control	KIT0184524A
Black remote control	KIT0184525A
Extension cable kit (5m)	KIT0112772

MODELS

INTERSTELLAR IX/F/65	PRF0151808
INTERSTELLAR BL/F/65	PRF0151809



Interstellar Black

Seashell

Design Fabrizio Crisà



■ **BLACK MATT**

TECHNICAL SPECIFICATIONS

Ø80 cm

Filtering

Pearl white, Matt white,
Matt black, Glossy stainless steel

- Aluminium grease filter included
- Regenerable charcoal filter included
- Remote control included

MIN DISTANCE FROM HOB


Gas	65 cm
Induction/Radiant	50 cm

FEATURES

Maintenance Alarm

Regenerable filter

DIMENSIONAL DRAWING

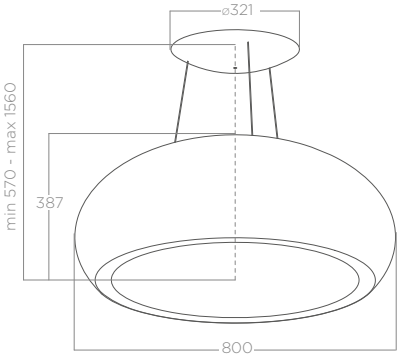

LIGHTING

Type	Neon 4×24 W
Intensity	1386 LUX
Temperature	6500 K

PERFORMANCE

Controls	3S+B Remote control
Booster airflow	400 m³/h
Noise level min-max	55-67 dB(A)
Total absorption	350 W

ACCESSORIES

Regenerable charcoal filter	CFC0141725A
White remote control	KIT0184524A
Black remote control	KIT0184525A
Extension cable kit (2,5m)	KIT0067590

MODELS

SEASHELL WH/F/80	PRF0024262A
SEASHELL WH MAT/F/80	PRF0098392
SEASHELL BL/F/80	PRF0098393
SEASHELL IX/F/80	PRF0098394

Model not subject to compulsory energy certification.

Shining

Design Fabrizio Crisà



■ **COMFORT SILENCE**

TECHNICAL SPECIFICATIONS

Ø50 cm

Filtering


Metal finishes:
Peltrox, rust, cast iron

- Aluminium grease filter included
- Regenerable charcoal filter included
- Remote control included

FEATURES

- Brushless
- Maintenance Alarm
- Delay Switch Off
- Regenerable filter

DIMENSIONAL DRAWING

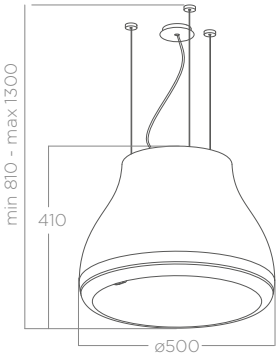

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 9 W
Intensity	685 LUX
Temperature	3500 K

ACCESSORIES

Regenerable charcoal filter HP	CFC0140053
Regenerable charcoal filter	CFC0140090
White remote control	KIT0184524A
Black remote control	KIT0184525A
Black wall installation kit	KIT0146155
Chrome wall installation kit	KIT0146156
Extension cable kit (5m)	KIT0112772

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	460 m^3/h
Noise level min-max	46-53 dB(A)
Total absorption	54 W
Energy Class	A

MODELS

SHINING RUST/F/50	PRF0120528A
SHINING PELTROX/F/50	PRF0120497A
SHINING CAST IRON/F/50	PRF0120590A

Optional wall mount kit available.

Édith

Design Fabrizio Crisà



- **BLACK MATT**
- **COMFORT SILENCE**

4 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS


Ø50 cm	
Filtering	
Matt white, Matt black	

- Aluminium grease filter included
- Regenerable charcoal filter included
- Remote control included

FEATURES

- Brushless
- Maintenance Alarm
- Delay Switch Off
- Regenerable filter

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 9 W
Intensity	685 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	460 m³/h
Noise level min-max	46-53 dB(A)
Total absorption	54 W
Energy class	A

ACCESSORIES

Regenerable charcoal filter HP	CFC0140053
Regenerable charcoal filter	CFC0140090
White remote control	KIT0184524A
Black remote control	KIT0184525A
Black wall installation kit	KIT0146155
Chrome wall installation kit	KIT0146156
Extension cable kit (5m)	KIT0112772

MODELS

ÉDITH CLASSIC/F/50	PRF0098360
ÉDITH ROCK/F/50	PRF0098361

Optional wall mount kit available.



Édith

Wave UX

Design Fabrizio Crisà



■ **BLACK MATT**

1 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

Ø51 cm

Filtering


Stainless steel, Matt black

- Aluminium grease filter included
- Regenerable charcoal filter included

FEATURES

- Maintenance Alarm
- Delay Switch Off
- Regenerable filter

DIMENSIONAL DRAWING

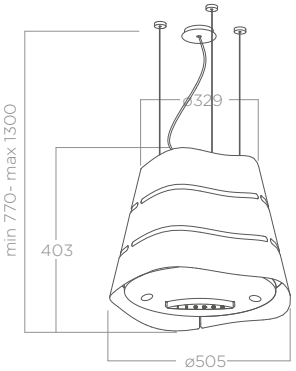

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 3X2,5 W + Led 4X3 W
Intensity	211 LUX
Temperature	4000 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	610 m³/h
Noise level min-max	46-62 dB(A)
Total absorption	219,5 W
Energy class	A

ACCESSORIES

Regenerable charcoal filter	CFC0140088
Black wall installation kit	KIT0175806
Stainless steel installation kit	KIT0175805
Extension cable kit (2,5m)	KIT01889
Extension cable kit (5m)	KIT01921

MODELS

WAVE UX BL MAT/F/51	PRF0171193
WAVE UX IX/F/51	PRF0171194

Optional wall mount kit available.

Easy UX

Design Fabrizio Crisà



■ **BLACK MATT**

TECHNICAL SPECIFICATIONS


Ø50 cm	
Filtering	
Stainless steel, White, Matt black	

- Aluminium grease filter included
- Regenerable charcoal filter included

FEATURES

- Maintenance Alarm
- Delay Switch Off
- Regenerable filter

DIMENSIONAL DRAWING

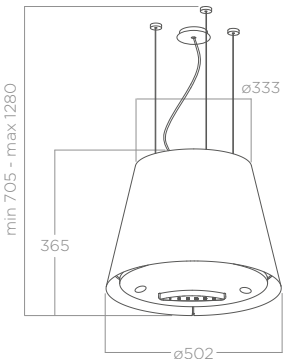

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 3X2,5 W
Intensity	211 LUX
Temperature	4000 K

ACCESSORIES

Regenerable charcoal filter	CFC0140088
Black wall installation kit	KIT0175806
Stainless steel wall installation kit	KIT0175805
Extension cable kit (2,5m)	KIT01889
Extension cable kit (5m)	KIT01921

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	610 m^3/h
Noise level min-max	46-62 dB(A)
Total absorption	207,5 W
Energy class	A

MODELS

EASY UX IX/F/50	PRF0120354A
EASY UX WH/F/50	PRF0119940A
EASY UX BL MAT/F/50	PRF0120352A

Optional wall mount kit available.

Pix

Design Fabrizio Crisà



- **BLACK MATT**
- **COMFORT SILENCE**

1 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

42×42 cm

Filtering

Matt white, Matt black, Concrete finish

- Aluminium grease filter included
- Regenerable charcoal filter included

MIN DISTANCE FROM HOB


Gas	65 cm
Induction/Radiant	50 cm

FEATURES

Maintenance Alarm

Regenerable filter

DIMENSIONAL DRAWING

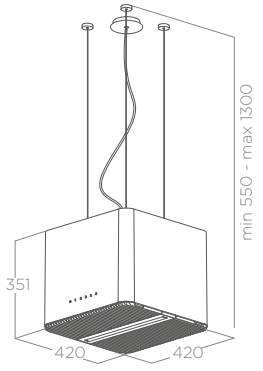

LIGHTING

Type	Strip Led 1×7 W
Intensity	365 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+B Capacitive touch control
Booster airflow	610 m^3/h
Noise level min-max	44-60 dB(A)
Total absorption	207 W
Energy class	A

ACCESSORIES

Regenerable charcoal filter	KIT0147175
Wall installation kit	KIT0146153
Extension cable kit (2,5m)	KIT0147941
Extension cable kit (5m)	KIT0147942

MODELS

PIX WH/F/42	PRF0145561
PIX BL/F/42	PRF0146220
PIX CONCRETE/F/42	PRF0146222

Optional wall mount kit available.

Juno S

Design Fabrizio Crisà



TECHNICAL SPECIFICATIONS

Ø50 cm

Filtering


Stainless steel, White, Black

- Aluminium grease filter included
- Regenerable charcoal filter included

FEATURES

Regenerable filter

DIMENSIONAL DRAWING

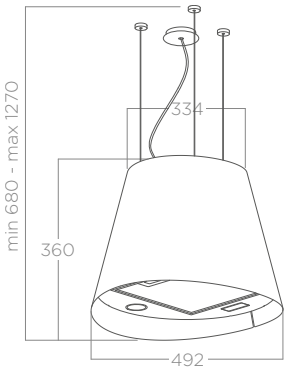

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×2,5 W
Intensity	381 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S Soft light push button
Max airflow	630 m³/h
Noise level min-max	51-67 dB(A)
Total absorption	255 W
Energy class	B

ACCESSORIES

Regenerable charcoal filter	CFC0140088
Black wall installation kit	KIT0175806
Stainless steel installation kit	KIT0175805
Extension cable kit (2,5m)	KIT01889
Extension cable kit (5m)	KIT01921


MODELS

JUNO S BL/F/50	PRF0170285
JUNO S IX/F/50	PRF0170291
JUNO S WH/F/50	PRF0170287


Optional wall mount kit available.

Technical drawings


Easy UX

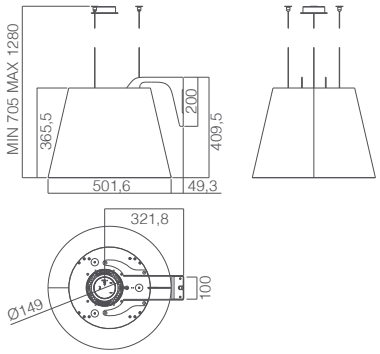


Édith

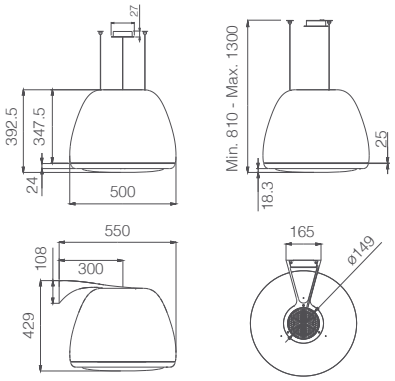


Interstellar

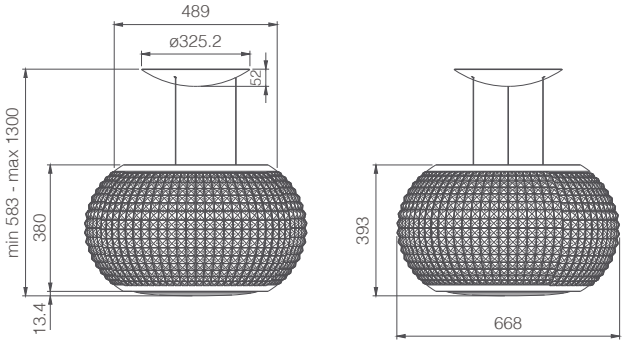


Juno S

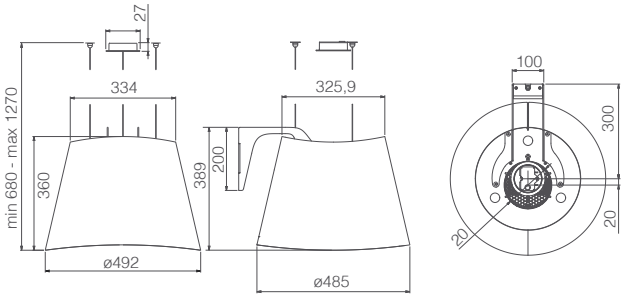


Pix

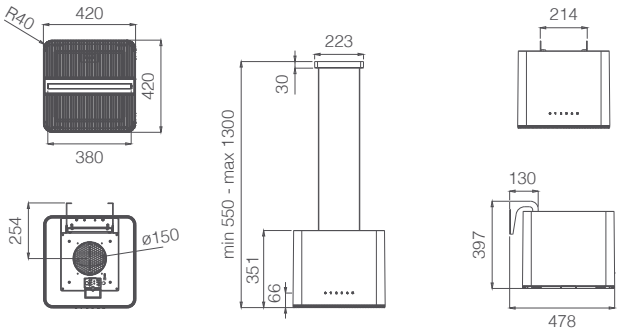


Seashell

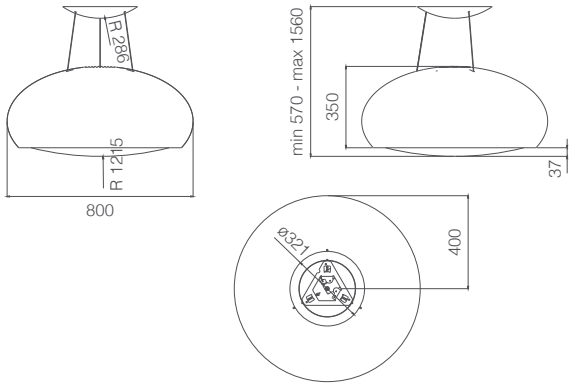

Shining

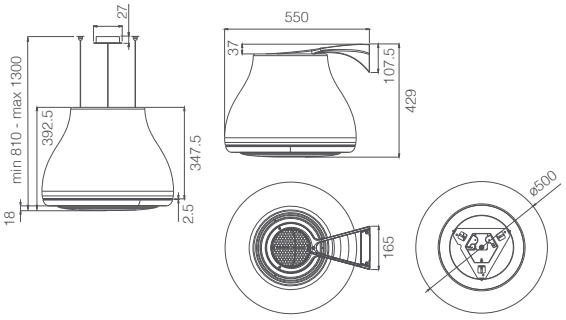


Wave UX

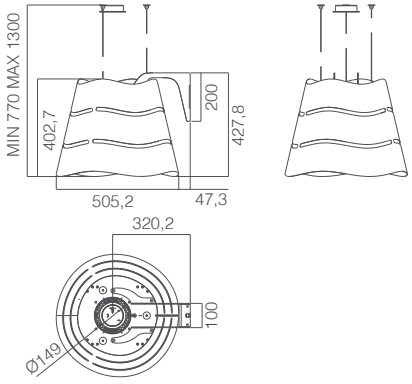

Comparative table Suspended hoods


MODEL	EASY UX	ÉDITH	INTERSTELLAR	JUNO S	PIX	SEASHELL	SHINING	WAVE UX
SIZE (CM)	50	50	65	50	42	80	50	51
FINISHING	stainless steel, white, matt black	black, stainless steel, white	stainless steel, black	black, stainless steel, white	black, white	white, matt white, black, stainless steel	peltrox, rust, cast iron	matt black, stainless steel
VERSION	Filtering	Filtering	Filtering	Filtering	Filtering	Filtering	Filtering	Filtering
CONTROLS	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control	3S Soft light push button	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control	3S+B Capacitive touch control
TYPE OF GREASE FILTER	GFA	GFA	GFA	GFA	GFA	GFA	GFA	GFA
DISTANCE FROM ELECTRIC HOB	50 cm	50 cm	50 cm	50 cm	50 cm	50 cm	50 cm	50 cm
DISTANCE FROM GAS HOB	65 cm	65 cm	65 cm	65 cm	65 cm	65 cm	65 cm	65 cm
AIRFLOW MIN-MAX(BOOST) M^3/H	265 - 515 (610)	240 - 350 (460)	240 - 350 (460)	310 - 630	250 - 445 (610)	180 - 335 (400)	240 - 350 (460)	265 - 515 (610)
NOISE LEVEL MIN-MAX(BOOST) DB(A)	46 - 62 (66)	46 - 53 (59)	46 - 53 (59)	51 - 67	44 - 60 (65)	55 - 67 (70)	46 - 53 (59)	46 - 62 (66)
LIGHTING	Led 3X2,5 W	Led 9 W	Led 9 W	Led 2 × 2,5W	Strip led 1 × 7W	Neon 4 × 24W	Led 9 W	Led 3 × 2,5 W + Led 4 × 3 W
TOTAL ABSORPTION	207,5 W	54 W	134 W	255 W	207 W	350 W	54 W	219,5 W
ENERGY CLASS: EEI	A	A	A	B	A	–	A	A
COMFORT SILENCE	–	■	■	–	■	–	■	–
BLACK MATT	■	■	–	–	■	■	–	■
DIMMER LIGHT	–	–	■	–	–	–	–	–
MAINTENANCE ALARM	■	■	■	–	■	■	■	■
DELAY SWITCH OFF	■	■	■	–	–	■	■	■
BRUSHLESS MOTOR	–	–	■	–	–	■	■	–

Hoods

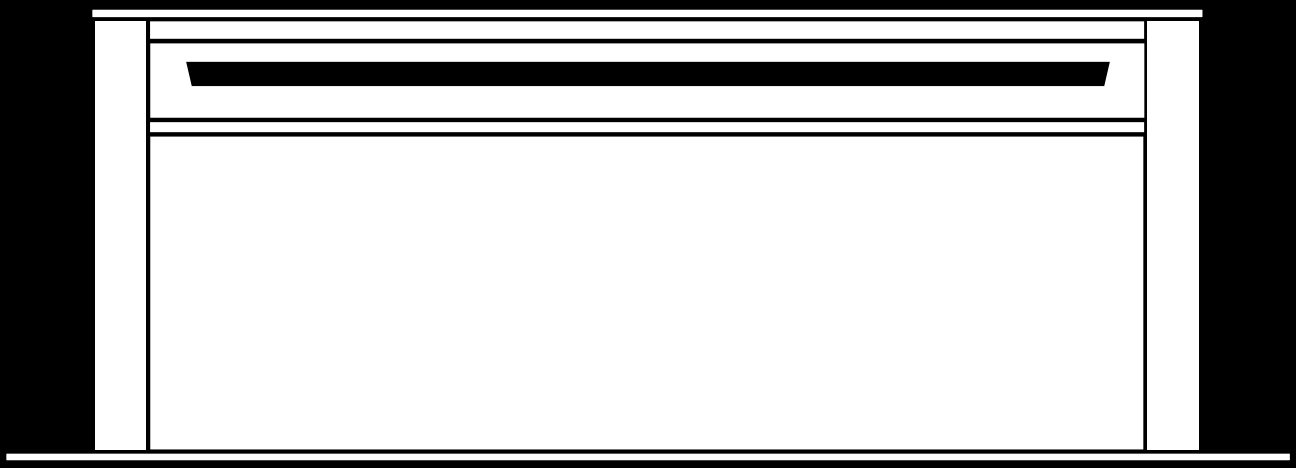

6.6 Downdraft

**It takes talent to disappear. All of our downdraft hoods pull off a disappearing act!
They can rise out of or go back into the hob, it's up to you: find your model in our Elica product line, distinguished by one-of-a- kind design and extraordinary performance.**

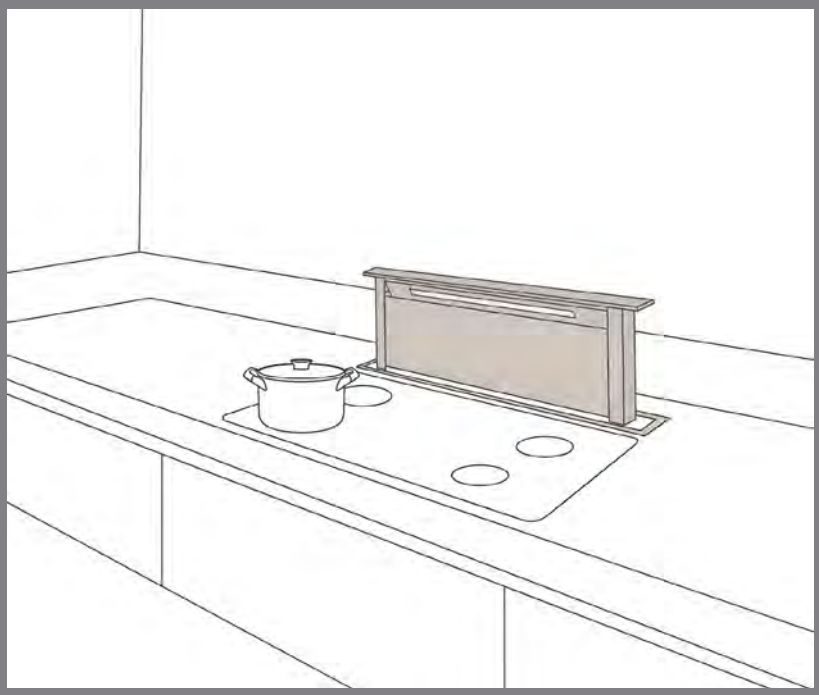


This is a good solution when the hob is far from the wall, in a kitchen peninsula or island unit. It is installed directly into the countertop.


Getup

Getup design adds aesthetics and functional value to any kitchen, while providing comfort at every moment of use.

Getup blends discreetly into different furnishing styles, offering high capture of cooking fumes, vapours and odours.



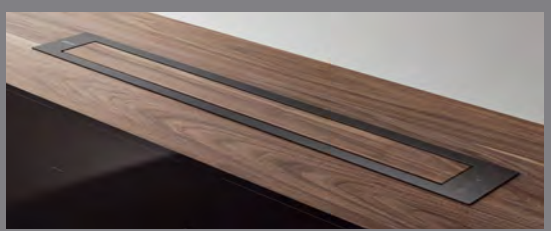

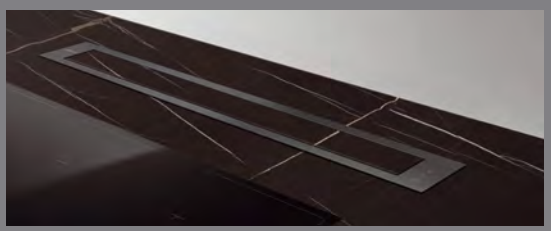

Original solutions.

Here at Elica, materials are the cornerstones in our path to innovation. The black finish of Getup is the result of a combination of black glass and soft-touch paint details, while the classic steel version reveals its timeless elegance. The ‘cast iron effect’ model is a true novelty: its shiny finish enhanced by a titanium profile perfectly matches modern kitchen styles and the aesthetic elements of gas hobs.
The ‘naked’ model allows the top panel to be covered with any type of texture (even the same as the worktop), thus making Getup a highly customisable product.

Freedom of installation.

Getup discreetly blends into different types of kitchen, allowing ample freedom of installation. It leaves plenty of free space into the cabinet, thanks to its compact sizes and the position of the extraction unit (allowing for deeper drawers).

Duct-out installation

- The motor can be mounted on board and on both sides of the appliance, and the air outlet can be rotated in all four directions.
- The extraction unit can be installed remotely (up to 3 m away), thus freeing up space inside the kitchen unit while maintaining extraction performance and quiet operation.

Recirculating installation

All the installation options mentioned are also valid for recirculating mode. Installation can be completed by choosing between two types of carbon filters: regenerable and high-performance regenerable.

On-board motor





Positioning examples

Filtering version motor



Remote motor



Example of motor remotization



Example of motor remotization

Getup

Design Fabrizio Crisà



- **DRAWER SAVER**
- **TOTAL INTEGRATION**
- **SMART INTERACTION**
- **BLACK MATT**

TECHNICAL SPECIFICATIONS

90 cm	
Duct-out	
Stainless steel, Matt black + black glass, Cast iron effect Cast iron effect + coverable	


▪ Aluminium grease filter included

FEATURES

Dim Light

Maintenance Alarm

DIMENSIONAL DRAWING

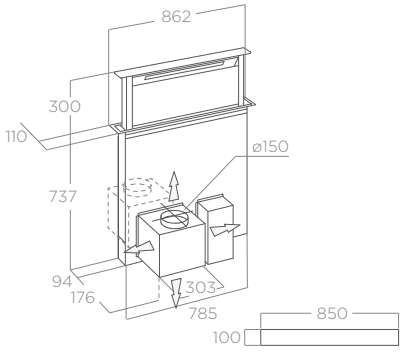

CUT FOR INSTALLATION

LIGHTING

Type	Strip Led 1×7 W
Intensity	253 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+2B infrared touch control Automatic Opening
Booster airflow	730 m³/h
Noise level min-max	43-63 dB(A)
Total absorption	257 W
Energy class	A

ACCESSORIES

Regenerable charcoal filter HP	KIT0166432
Regenerable charcoal filter	KIT0166444
Remote motor transformation kit	KIT0166435
Chrome-plated trim profile	KIT0187322

MODELS

GETUP BL MAT/A/90	PRF0162784
GETUP IX/A/90	PRF0161680
GETUP NAKED/A/90	PRF0162869
GETUP CAST IRON/A/90	PRF0162866

Pandora

Design Fabrizio Crisà



- **COMFORT SILENCE**
- **TOTAL INTEGRATION**

TECHNICAL SPECIFICATIONS

90 cm

Filtering (internal motor)
Duct-out (external motor)

Stainless steel + black glass,
Black + black glass

- Aluminium grease filter included
- Regenerable charcoal filter included


FEATURES

Maintenance Alarm


Regenerable filter

DIMENSIONAL DRAWING

Remote motor - GME



On-board motor



PERFORMANCE

Controls	3S+B Electronic Push Button Push-Pull Opening
Booster airflow	669 m³/h
Noise level min-max	45-59 dB(A)
Total absorption	275 W
Energy class	A - C (No Motor)

ACCESSORIES

Charcoal filter	CFC0142324
External remote motor GME22A (wall)	PRF0179706
Remote internal motor GME88	PRF0046491A

MODELS

PANDORA BL/F/90 (*)	PRF0120979
PANDORA IX/F/90 (*)	PRF0120980
PANDORA GME BL/A/90 (**)	PRF0120981
PANDORA GME IX/A/90 (**)	PRF0120982

(*) On-board motor supplied (**) On-board motor not supplied

Further information on remote motors on page 328


elica

elica


Accessories

Optional pipe fittings for duct-out version.


KIT0120991
222×89×1000 mm




KIT0173527
222×89×500 mm



KIT0120996
Ø150×500 mm



KIT0121000
Ø150×1000mm



KIT0121001
227×94×80mm




KIT0121002
15° 227×138×94mm



KIT0121003
Ø158X59mm



KIT0121004
90° 227×288×94mm




KIT0121005
90° - 227×94mm




KIT0121006
90° - Ø157mm



KIT0121007
227×94 - Ø146mm



KIT0121008
227×94 - Ø153mm



KIT0121009 (stainless steel)
int 216×82
ext 290×160 mm



KIT0121010 (stainless steel)
190×190 - Ø147mm




KIT0206255 (plastic)
190×190 - Ø147mm



KIT0126810
227×94×190/560 mm




KIT0161453
50 mm x 25 m



Buy on Elica Shop

Optional pipe fittings for filtering version.

KIT0121012
218×55×500 mm



KIT0121013
218×55×1000 mm



KIT0121015
223×59X72 mm




KIT0121016
90° 218×55 mm



KIT0121017
218×55×190/590 mm



KIT0161453
50 mm x 25 m




KIT0161457
Ø150×240 mm

To avoid the formation of condensation and the flowback towards the source of air output, we advise installing this component along the outlet pipe, taking care to position it horizontally to ensure correct operation. The accessory must be installed on the motor if there is an INLINE remote motor unit.




Technical drawings


Getup

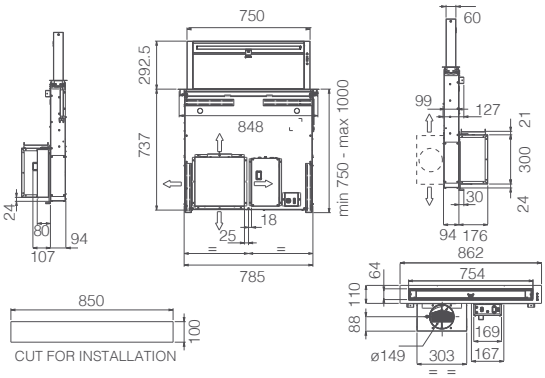

Pandora

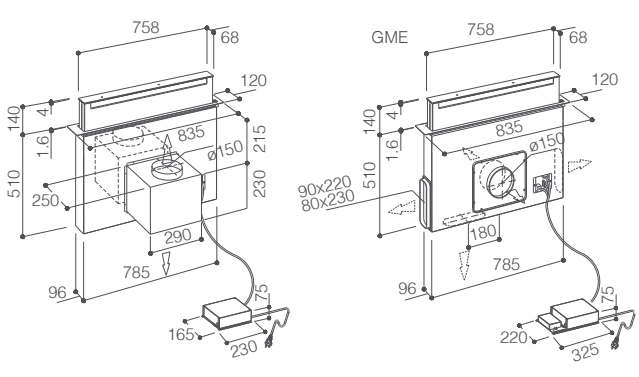


Hoods

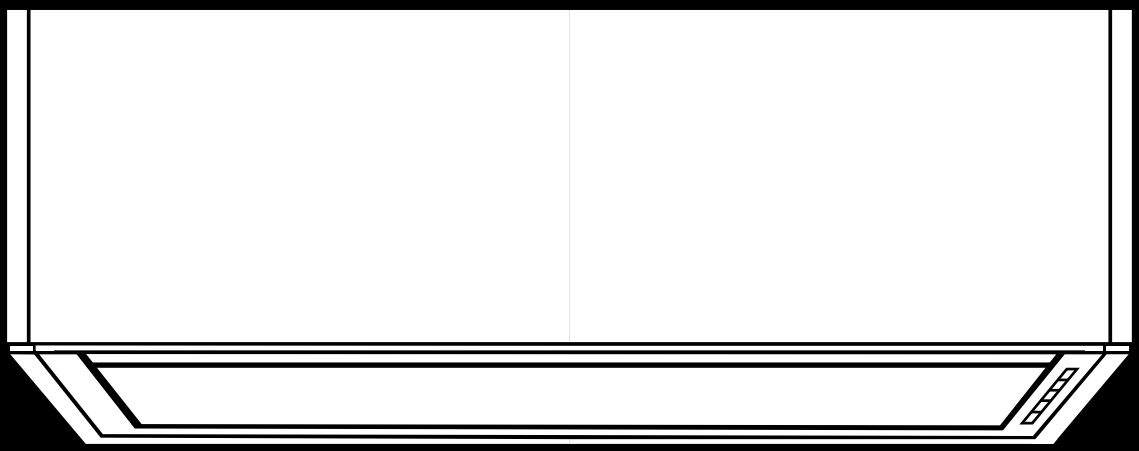

6.7 Built-in
without cabinet base

Looking for an under-cabinet hood that replaces the bottom panel of the unit and protects wall units even in low-height installations? Among our range, you'll find the one best suited to your kitchen.

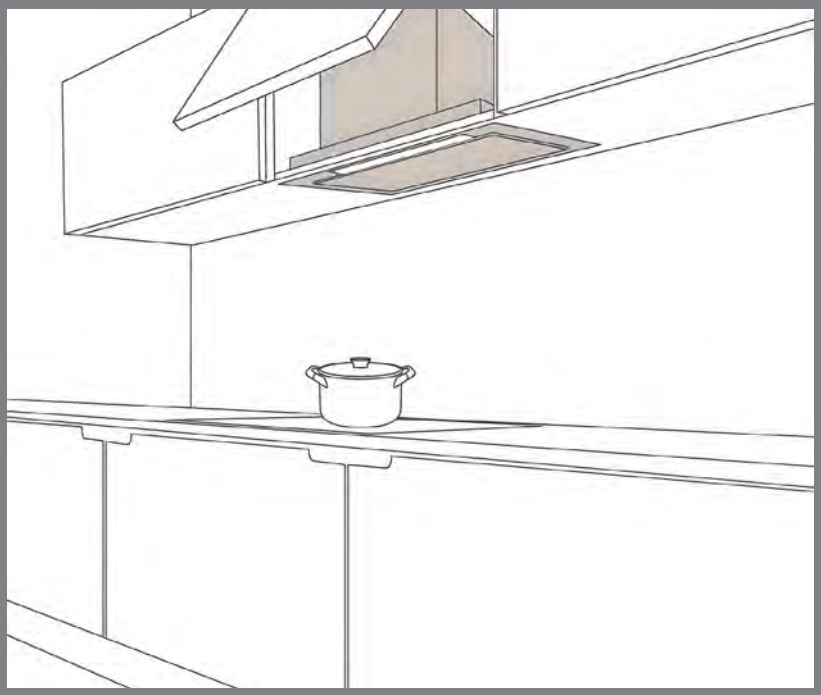

The design of the built-in hood protects the wall cabinet, optimising the space of the unit and leaving the inside free to store jars, bottles and everyday items up to 12 kg per side.

Boxin No Drip 2.0

Design Fabrizio Crisà

NO DRIP SYSTEM

Hidden heating elements reduce steam on the surface; residual droplets are channeled into an easily accessible tray.

ERGONOMIC VISOR INTERFACE

The front visor with integrated controls allows practical and ergonomic product control.

BLACK MATT

Matt black finish offering a minimal and contemporary style, while reducing reflections and simplifying cleaning.

TOTAL CABINET INTEGRATION


A design that adapts to the characteristics of the kitchen. The variety of solutions and finishes allows perfect integration, whatever your cabinet.



Boxin No Drip 2.0 Stainless Steel



DIMENSIONAL DRAWING

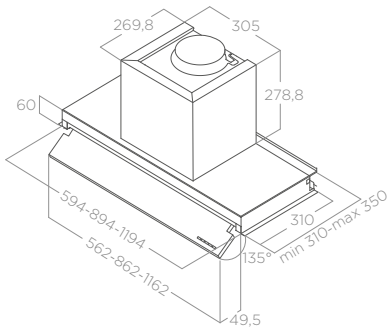

TECHNICAL SPECIFICATIONS

Size	60 - 90 - 120 cm
Version	Duct-out
Finishing	Stainless steel, Matt black

- Anti-condensation grease filter included

FEATURES

Maintenance Alarm

MIN DISTANCE FROM HOB

Gas	62 cm
Induction/Radiant	50 cm

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Telescopic chimney kit h18,5+h18,5	KIT0141458
Chimney kit H12 IX	KIT0091876
Chimney kit H12 Matt Black	KIT0213725
Air diffuser grid kit 150mm	KIT0162617

LIGHTING

Type	Strip Led 1×7 W
Intensity	421 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+B Electronic Push Button
Booster airflow	700 m^3/h
Noise level min-max	36-66 dB(A)
Total absorption	286 W (60cm) - 307 W (90cm) - 325 W (120cm)
Energy class	A

MODELS

BOXIN NO DRIP 2.0 IX/A/60	PRF0205572
BOXIN NO DRIP 2.0 IX/A/90	PRF0205581
BOXIN NO DRIP 2.0 IX/A/120	PRF0205589
BOXIN NO DRIP 2.0 BLMAT/A/60	PRF0208528
BOXIN NO DRIP 2.0 BLMAT/A/90	PRF0208593
BOXIN NO DRIP 2.0 BLMAT/A/120	PRF0208657

Boxin Advance Dry



- **DRY SYSTEM**
- **AIRMATIC**
- **CONNEX**
- **BLACK MATT**
- **TOTAL CABINET INTEGRATION**

TECHNICAL SPECIFICATIONS

60 - 75 - 90 - 120 cm

Duct-out

Stainless steel, Matt black

- Anti-condensation grease filter included

MIN DISTANCE FROM HOB

Gas	57 cm
Induction/Radiant	50 cm


FEATURES

Dim Light

Delay Switch Off

Maintenance Alarm

DIMENSIONAL DRAWING

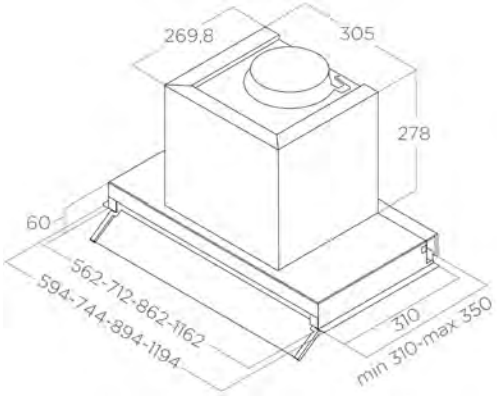

LIGHTING

Type	Strip Led 1×7W
Intensity	421 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S+B Electronic Push Button
Booster airflow	710 m^3/h
Noise level min-max	52-66 dB(A)
Total absorption	257 W
Energy class	B

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Telescopic chimney kit h18,5+h18,5	KIT0141458
Chimney kit H12 IX	KIT0091876
Chimney kit H12 Matt Black	KIT0213725
Air diffuser grid kit 150mm	KIT0162617

MODELS

BOXIN ADV DRY @ IX/A/60	PRF0199886
BOXIN ADV DRY @ IX/A/75	PRF0200559
BOXIN ADV DRY @ IX/A/90	PRF0200560
BOXIN ADV DRY @ IX/A/120	PRF0200561
BOXIN ADV DRY @ BLMAT/A/60	PRF0206369
BOXIN ADV DRY @ BLMAT/A/75	PRF0207054
BOXIN ADV DRY @ BLMAT/A/90	PRF0207129
BOXIN ADV DRY @ BLMAT/A/120	PRF0207200

Boxin Easy Dry



- EASY DRY SYSTEM
- ROTATIVE EASY CONTROL
- GREASE EFFICIENCY CLASS B
- BLACK MATT
- TOTAL CABINET INTEGRATION


TECHNICAL SPECIFICATIONS

60 - 90 - 120 cm	
Duct-out	
Matt black	
▪ Anti-condensation grease filter included	

MIN DISTANCE FROM HOB

Gas	50 cm
Induction/Radiant	50 cm

DIMENSIONAL DRAWING

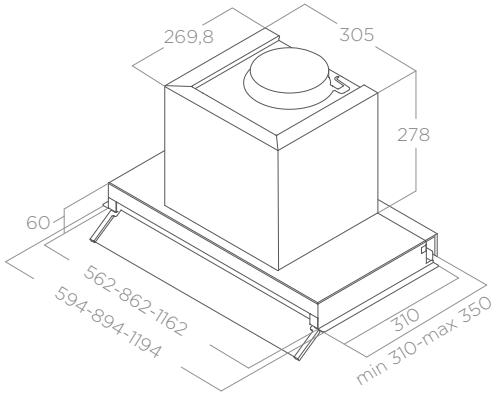

LIGHTING

Type	Led 2×2,5 W
Intensity	381 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Telescopic chimney kit h18,5+h18,5	KIT0141458
Chimney kit H12 Matt Black	KIT0213725
Air diffuser grid kit 150mm	KIT0162617

PERFORMANCE

Controls	3S Mechanical rotative
Max airflow	620 m^3/h
Noise level min-max	50-70 dB(A)
Total absorption	255 W
Energy class	B

MODELS

BOXIN LX EASY DRY BLMAT/A/60 P.31-35	PRF0213256
BOXIN LX EASY DRY BLMAT/A/90 P.31-35	PRF0213266
BOXIN LX EASY DRY BLMAT/A/120 P.31-35	PRF0213267

Boxin



- ROTATIVE EASY CONTROL
- BLACK MATT
- TOTAL CABINET INTEGRATION

TECHNICAL SPECIFICATIONS

60 - 75 - 90 - 120 cm	
Duct-out	
Stainless steel, Matt black	
▪ Aluminium grease filter included	

MIN DISTANCE FROM HOB

Gas	50 cm
Induction/Radiant	50 cm


LIGHTING

Type	Led 2×2,5 W
Intensity	381 LUX
Temperature	3500 K

PERFORMANCE

Controls	3S Mechanical rotative
Max airflow	620 m^3/h
Noise level min-max	50-70 dB(A)
Total absorption	255 W
Energy class	A

DIMENSIONAL DRAWING



ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Charcoal filter	CFC0141497
Telescopic chimney kit h18,5+h18,5	KIT0141458
Chimney kit H12 IX	KIT0091876
Chimney kit H12 Matt Black	KIT0213725
Air diffuser grid kit 150mm	KIT0162617

MODELS

BOXIN LX/IX/A/60	PRF0114760A
BOXIN LX/IX/A/75	PRF0178649
BOXIN LX/IX/A/90	PRF0114761A
BOXIN LX/IX/A/120	PRF0114762A
BOXIN LX/BL MAT/A/60	PRF0172166
BOXIN LX/BL MAT/A/90	PRF0172167
BOXIN LX/BL MAT/A/120	PRF0172168

Glass Out



■ **SPACE SAVING**


TECHNICAL SPECIFICATIONS

60 - 90 cm	
Duct-out	
Stainless steel + glass	
▪ Stainless steel grease filter included	

FEATURES

- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

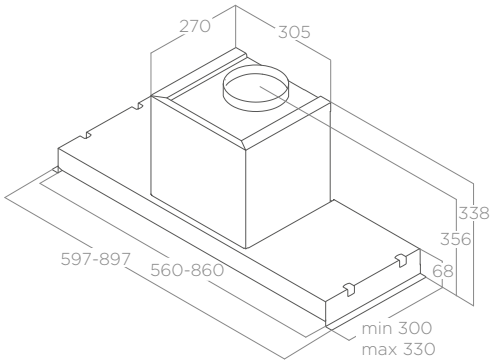

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×2,5 W
Intensity	141 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Telescopic chimney kit h18,5+h18,5	KIT0141458
Chimney kit H12 IX	KIT0091876
Air diffuser grid kit 150mm	KIT0162617

PERFORMANCE

Controls	3S+B Capacitive touch control
Max airflow	560 m^3/h
Noise level min-max	53-61 dB(A)
Total absorption	227 W
Energy class	A

MODELS

GLASS OUT IX/A/60	PRF0109787
GLASS OUT IX/A/90	PRF0109788

Lever




■ **SPACE SAVING**

TECHNICAL SPECIFICATIONS
60 - 90 - 120 cm
Duct-out
Stainless steel + glass
▪ Aluminium grease filter included

MIN DISTANCE FROM HOB	
Gas	50 cm
Induction/Radiant	50 cm

DIMENSIONAL DRAWING

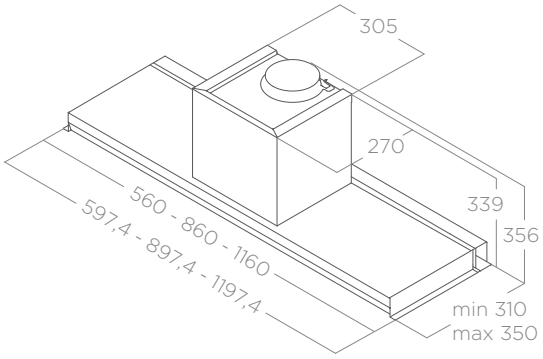

LIGHTING	
Type	Led 2×2,5 W
Intensity	145 LUX (60 - 90 cm) / 381 (120 cm)
Temperature	3500 K

ACCESSORIES	
Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Telescopic chimney kit h18,5+h18,5	KIT0141458
Chimney kit H12 IX	KIT0091876
Air diffuser grid kit 150mm	KIT0162617

PERFORMANCE	
Controls	3S Mechanical Push Button
Max airflow	603 m^3/h
Noise level min-max	46-67 dB(A)
Total absorption	255 W
Energy class	B

MODELS	
LEVER IX/A/56	PRF0160153
LEVER IX/A/86	PRF0160152
LEVER IX/A/116	PRF0163362

Ciak 2.0 S




■ **TOTAL CABINET INTEGRATION**

TECHNICAL SPECIFICATIONS
60 - 90 cm
Duct-out
Grey + glass
▪ Aluminium grease filter included

MIN DISTANCE FROM HOB	
Gas	50 cm
Induction/Radiant	50 cm

DIMENSIONAL DRAWING

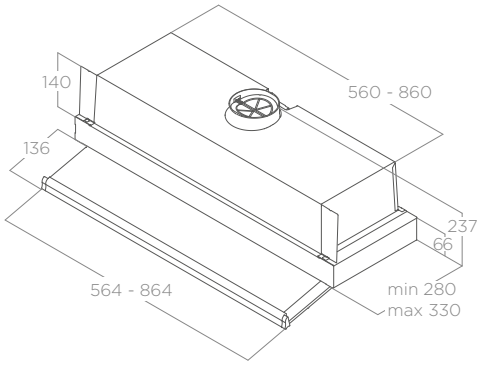

LIGHTING	
Type	Led 2×2,5 W
Intensity	141 LUX
Temperature	3500 K

ACCESSORIES	
Charcoal filter	CFC0141571

PERFORMANCE	
Controls	3S Mechanical Slider
Max airflow	425 m^3/h
Noise level min-max	57-69 dB(A)
Total absorption	120 W
Energy class	B

MODELS	
CIAK 2.0 S GR/A/60	PRF0181902
CIAK 2.0 S GR/A/90	PRF0181903

Ciak 2.0




■ **TOTAL CABINET INTEGRATION**

TECHNICAL SPECIFICATIONS
60 - 90 cm
Duct-out
Grey
▪ Aluminium grease filter included

MIN DISTANCE FROM HOB	
Gas	65 cm
Induction/Radiant	50 cm

DIMENSIONAL DRAWING

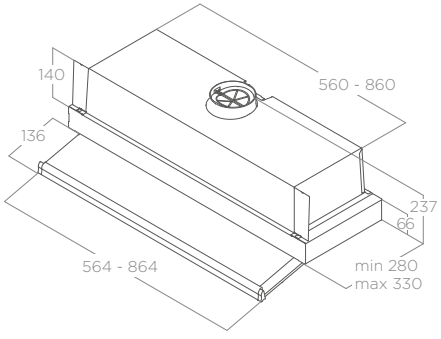

LIGHTING	
Type	Led 2×3 W
Intensity	121 LUX
Temperature	2700 K

ACCESSORIES	
Charcoal filter	CFC0141571

PERFORMANCE	
Controls	3S Mechanical Slider
Max airflow	225 m^3/h
Noise level min-max	47-55 dB(A)
Total absorption	81 W
Energy class	C

MODELS	
CIAK 2.0 GR/A/60	PRF0181896
CIAK 2.0 GR/A/90	PRF0181898

Elite 35



TECHNICAL SPECIFICATIONS

60 - 90 cm

Duct-out

Grey + stainless steel, black

- Aluminium grease filter included

MIN DISTANCE FROM HOB


Gas	50 cm
Induction/Radiant	50 cm

FEATURES

Delay Switch Off

Alarme De Maintenance

DIMENSIONAL DRAWING

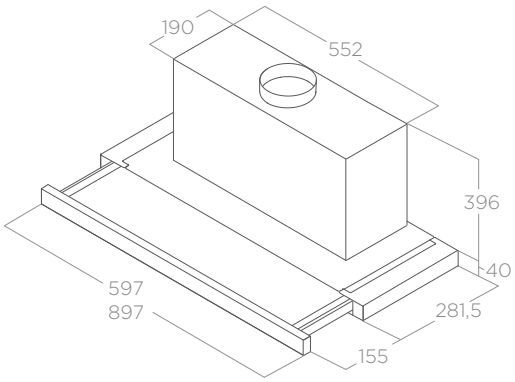

LIGHTING

Type	Led 2×3 W
Intensity	49 LUX
Temperature	2700 K

ACCESSORIES

Charcoal filter	CFC0140075
Air diffuser grid kit 150mm	KIT0162617

PERFORMANCE

Controls	3S+B Electronic Push Button
Max airflow	640 m^3/h
Noise level min-max	46-63 dB(A)
Total absorption	206 W
Energy class	A

MODELS

ELITE 35 GRIX/A/60	PRF0139077
ELITE 35 GRIX/A/90	PRF0139069
ELITE 35 BL/A/60 GFB	PRF0210603

Elite 26



TECHNICAL SPECIFICATIONS

60 - 90 cm

Duct-out

Stainless steel + glass,
Stainless steel, black

- Aluminium grease filter included

MIN DISTANCE FROM HOB


Gas	65 cm
Induction/Radiant	50 cm

FEATURES

Delay Switch Off

Alarme De Maintenance

DIMENSIONAL DRAWING

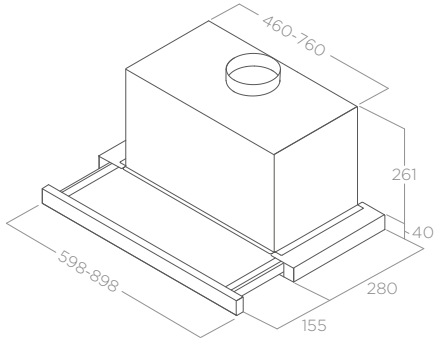

LIGHTING

		PB
Type	Led 2×2,5 W	Led 2×3 W
Intensity	49 LUX	49 LUX
Temperature	3500 K	2700 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617
Side-fixing bracket kit for wall unit	KIT0179893

PERFORMANCE

		PB
Controls	3S+B Electronic Push Button	3S Mechanical Push Button
Max airflow	581 m^3/h	480 m^3/h
Noise level min-max	44-61 dB(A)	44-65 dB(A)
Total absorption	180 W	181 W
Energy class	C	C

MODELS

ELITE 26 IX/A/60/VT	PRF0094051B
ELITE 26 IX/A/90/VT	PRF0094215B
ELITE 26 IX/A/60	PRF0038809B
ELITE 26 IX/A/90	PRF0038812B
ELITE 26 PB IX/A/60	PRF0126077B
ELITE 26 BL/A/60 GFB	PRF0210598

Elite 14



TECHNICAL SPECIFICATIONS

50 - 60 - 90 cm

Duct-out


Grey + stainless steel, Stainless steel, Black, White, Grey + White glass, Grey + glass, Black + black glass

- Aluminium grease filter included

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

DIMENSIONAL DRAWING

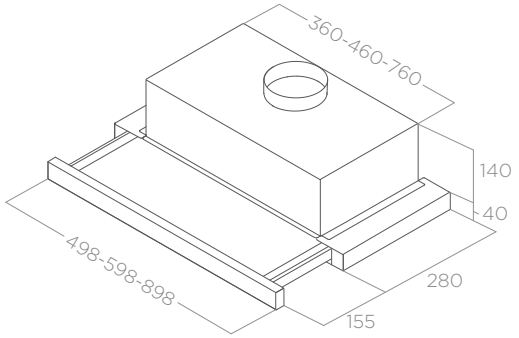

LIGHTING

Type	Led 2×3 W
Intensity	73 LUX (LX) - 78 LUX (PLUS)
Temperature	2700 K

PERFORMANCE

Controls	3S Mechanical Push Button	
	LUX	PLUS
Max airflow	304 m^3/h	400 m^3/h
Noise level min-max	46-62 dB(A)	60-70 dB(A)
Total absorption	121 W	121 W
Energy class	D	C


ACCESSORIES

Charcoal filter	CFC0141571
Side-fixing bracket kit for wall unit	KIT0179893

MODELS


ELITE 14 LUX BLGB/A/60	PRF0202867
ELITE 14 LUX BL/A/50	PRF0081870B
ELITE 14 LUX BL/A/60	PRF0037991B
ELITE 14 LUX GRIX/A/50	PRF0037987B
ELITE 14 LUX GRIX/A/60	PRF0037989B
ELITE 14 LUX GRIX/A/90	PRF0037992B
ELITE 14 LUX GRVT/A/60	PRF0098874B
ELITE 14 LUX GRVT/A/90	PRF0098879B
ELITE 14 LUX GRVTWH/A/60	PRF0116536B
ELITE 14 LUX GRVTWH/A/90	PRF0116530B
ELITE 14 LUX WH/A/50	PRF0037988C
ELITE 14 LUX WH/A/60	PRF0037990B
ELITE 14 LUX WH/A/90	PRF0037993B
ELITE 14 PLUS IX/A/60	PRF0126053
ELITE 14 PLUS BL/A/60	PRF0181966

Hoods

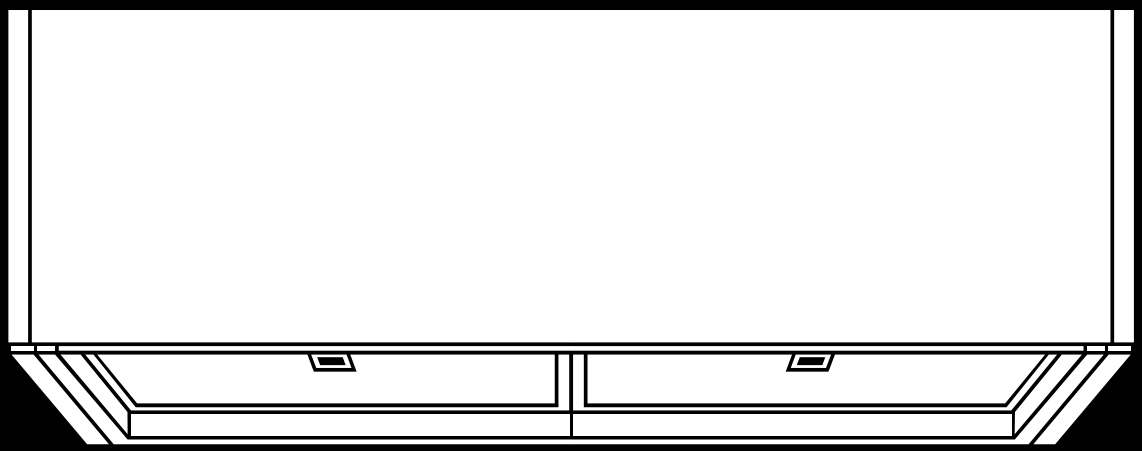

6.8 Built-in
with cabinet base

In the market for an under-cabinet, built-in hood to fit into a plasterboard structure?
Then, you are in the right place. We most definitely have the best model for your kitchen and you.

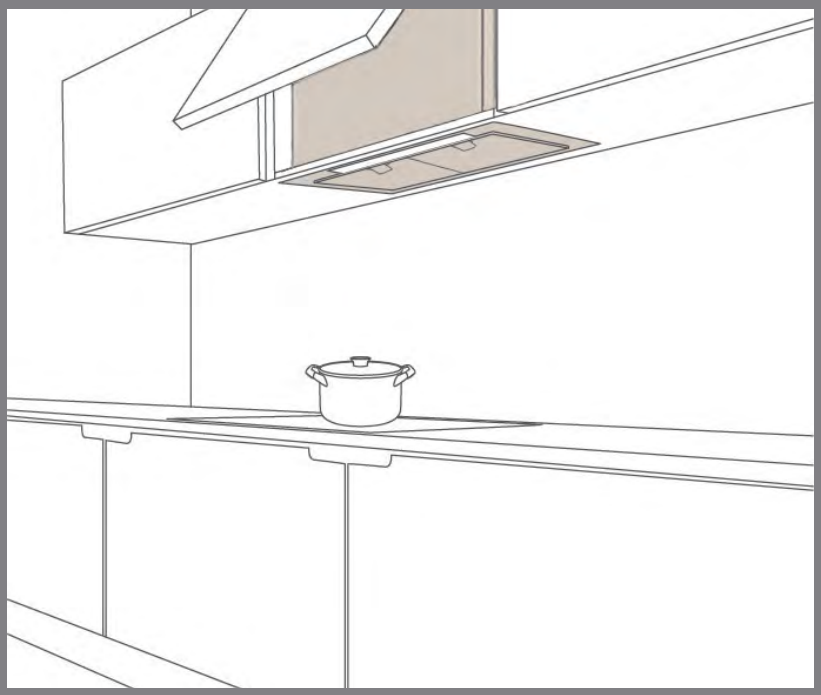

This type of hood is concealed inside a cabinet.

Hidden Advance Plus

Design Fabrizio Crisà



- **COMFORT SILENCE**
- **CONNEX**
- **AIRMATIC**
- **SPACE SAVING**
- **TOTAL CABINET INTEGRATION**

TECHNICAL SPECIFICATIONS

52 - 72 cm	
Duct-out	
Stainless steel Matt black + black glass, Matt white + White glass	

▪ Aluminium grease filter included


MIN DISTANCE FROM HOB

Gas	57 cm
Induction/Radiant	43 cm

FEATURES

- Perimeter Aspiration
- Dim Light
- Tune White
- Brushless
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

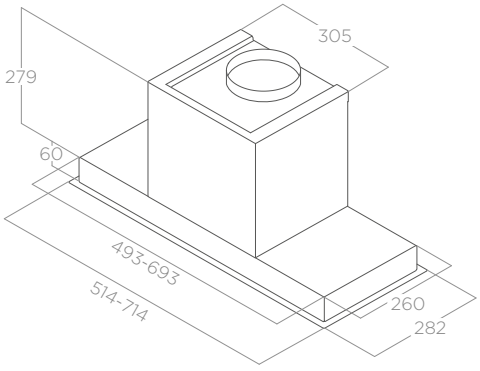

LIGHTING

Type	Strip Led 1×7 W
Intensity	421 LUX
Temperature	3000 - 3500 - 4000 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Telescopic chimney kit h18,5+h18,5	KIT0141458
Air diffuser grid kit 150mm	KIT0162617

PERFORMANCE

Controls	3S+B Electronic Push Button
Booster airflow	620 m³/h
Noise level min-max	41-59 dB(A)
Total absorption	157 W
Energy class	A+

MODELS

HIDDEN ADV PLUS @ IX/A/52	PRF0180299A
HIDDEN ADV PLUS @ IX/A/72	PRF0182867A
HIDDEN ADV PLUS @ BLGL/A/52	PRF0183971A
HIDDEN ADV PLUS @ BLGL/A/72	PRF0184107A
HIDDEN ADV PLUS @ WHGL/A/52	PRF0211317
HIDDEN ADV PLUS @ WHGL/A/72	PRF0211318


NCA: PANE
BISCOTTI
FRAGOLE
MELANZANE
Zucchine

Hidden 2.0

Design Fabrizio Crisà



- **SPACE SAVING**
- **TOTAL CABINET INTEGRATION**
- **BLACK MATT**

TECHNICAL SPECIFICATIONS

60 - 80 cm

Duct-out

Stainless steel, Stainless steel + glass White, Stainless steel + matt black, Stainless steel + matt white

- Aluminium grease filter included


MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

FEATURES

- Perimeter Aspiration
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

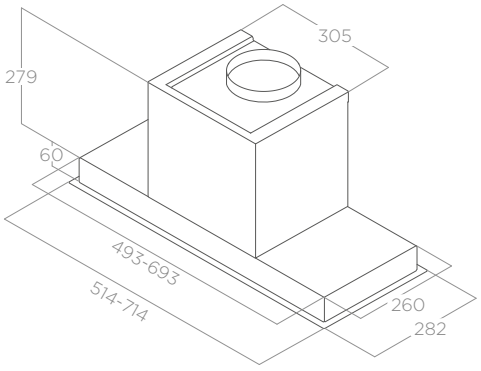

LIGHTING

Type	Strip Led 1×7 W
Intensity	421 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Telescopic chimney kit h18,5+h18,5	KIT0141458
Air diffuser grid kit 150mm	KIT0162617

PERFORMANCE

Controls	3S+B Electronic Push Button
Booster airflow	690 m^3/h
Noise level min-max	51-67 dB(A)
Absorption	277 W
Energy class	A

MODELS

HIDDEN 2.0 IX/A/52	PRF0092333A
HIDDEN 2.0 IX/A/72	PRF0095073A
HIDDEN 2.0 IXGL/A/52	PRF0097676A
HIDDEN 2.0 IXGL/A/72	PRF0097708A
HIDDEN 2.0 WH MAT/A/52	PRF0209467
HIDDEN 2.0 WH MAT/A/72	PRF0209480
HIDDEN 2.0 BL MAT/A/52	PRF0197740
HIDDEN 2.0 BL MAT/A/72	PRF0197747

Ct35 Pro



- **SEMI PRO**
- **TOTAL CABINET INTEGRATION**

TECHNICAL SPECIFICATIONS

60 - 90 - 120 cm

Duct-out


Stainless steel

▪ Professional stainless steel grease filter included

FEATURES

- Back Aspiration
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

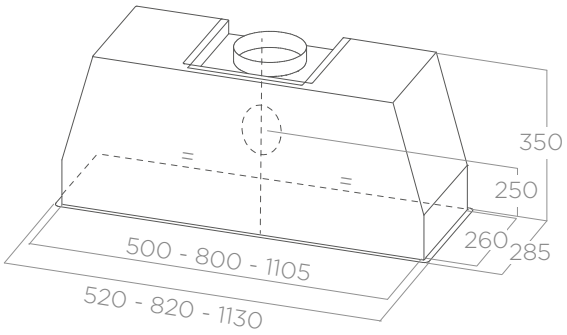

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

	60 cm	90 cm	120 cm
Type	Strip Led 2×3 W	Strip Led 2×3 W	Strip Led 2×3 W
Intensity	121 LUX	97 LUX	73 LUX
Temperature	4200 K	4200 K	4200 K

ACCESSORIES

External remote motor GME11	PRF0006209A
External remote motor GME22A (wall)	PRF0179706

PERFORMANCE

Controls	3S+B Electronic Push Button		
	60 cm	90 cm	120 cm
Booster airflow	650 m^3/h	750 m^3/h	780 m^3/h
Noise level min-max	51-73 dB(A)	50-69 dB(A)	52-69 dB(A)
Absorption	281 W	281 W	281 W
Energy class	A	A	A

MODELS

CT35 PRO IX/A/60	PRF0183203
CT35 PRO IX/A/90	PRF0183209
CT35 PRO IX/A/120	PRF0183210
CT35 PRO GME IX/A/60	PRF0183213
CT35 PRO GME IX/A/90	PRF0183218
CT35 PRO GME IX/A/120	PRF0183219

Fold S



- **TOTAL CABINET INTEGRATION**
- **SUPER EASY INSTALLATION**

TECHNICAL SPECIFICATIONS

60 - 80 cm	
Duct-out	
Stainless steel	
▪ Aluminium grease filter included	

MIN DISTANCE FROM HOB


Gas	65 cm
Induction/Radiant	45 cm

FEATURES

Delay Switch Off

Maintenance Alarm

DIMENSIONAL DRAWING

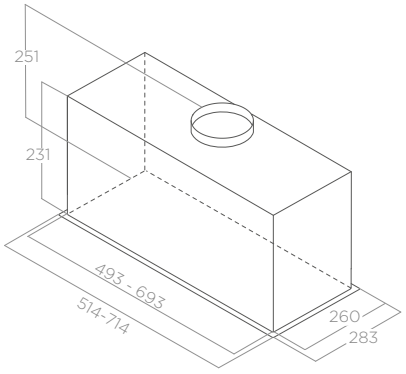

LIGHTING

Type	Strip Led 1×7 W
Intensity	477 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617

PERFORMANCE

Controls	3S+B Electronic Push Button
Booster airflow	710 m^3/h
Noise level min-max	53-66 dB(A)
Absorption	257 W
Energy class	B

MODELS

FOLD S IX/A/52	PRF0181962
FOLD S IX/A/72	PRF0181963

Fold



- TOTAL CABINET INTEGRATION
- SUPER EASY INSTALLATION
- BLACK MATT

TECHNICAL SPECIFICATIONS

60 - 80 cm
Duct-out
Grey, matt black
▪ Aluminium grease filter included

MIN DISTANCE FROM HOB


Gas	65 cm
Induction/Radiant	45 cm

FEATURES

Delay Switch Off

Maintenance Alarm

DIMENSIONAL DRAWING

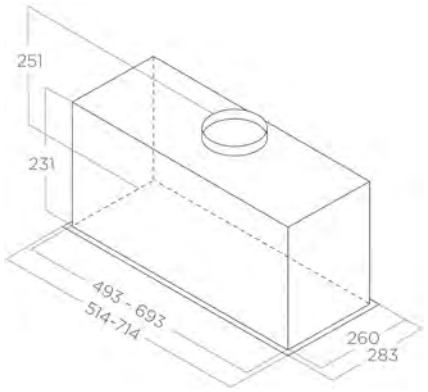

LIGHTING

Type	Led 2×2,1 W
Intensity	221 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617

PERFORMANCE

Controls	3S Soft light push button
Booster airflow	580 m^3/h
Noise level min-max	46-65 dB(A)
Absorption	180 W
Energy class	B

MODELS

FOLD GR/A/52	PRF0180808
FOLD GR/A/72	PRF0180820
FOLD BL MAT/A/52	PRF0181960
FOLD BL MAT/A/72	PRF0181961

Era S



- **TOTAL CABINET INTEGRATION**
- **SUPER EASY INSTALLATION**


TECHNICAL SPECIFICATIONS

60 - 80 cm	
Duct-out	
Stainless steel, Black	
▪ Stainless steel grease filter included	

MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

DIMENSIONAL DRAWING

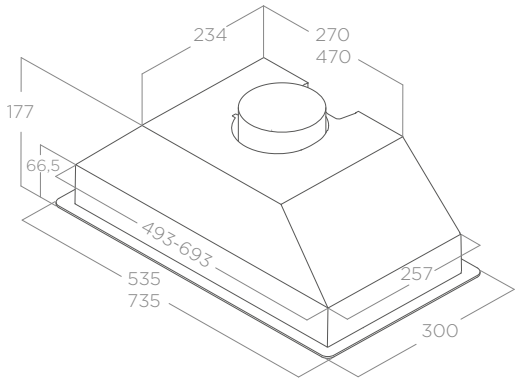

LIGHTING

Type	Led 2×3 W
Intensity	73 LUX
Temperature	2700 K

ACCESSORIES

Charcoal filter	CFC0141571

PERFORMANCE

Controls	3S Mechanical rotative
Max airflow	428 m^3/h
Noise level min-max	57-68 dB(A)
Total absorption	121 W
Energy class	B

MODELS

ERA S IX/A/52	PRF0142886
ERA S IX/A/72	PRF0142744
ERA S BL/A/52	PRF0197684
ERA S BL/A/72	PRF0197686


Era C



TECHNICAL SPECIFICATIONS

60 - 80 cm	
Duct-out	
Stainless steel, White, Black	
▪ Aluminium grease filter included	

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	45 cm

LIGHTING

Type	Led 2×3 W
Intensity	73 LUX
Temperature	2700 K

PERFORMANCE

Controls	3S Mechanical Push Button
Max airflow	368 m³/h
Noise level min-max	62-67 dB(A)
Total absorption	146 W
Energy class	D

ACCESSORIES

Charcoal filter	CFC0141571

MODELS

ERA C IX/A/52	PRF0142723
ERA C IX/A/72	PRF0142741
ERA C WH/A/52	PRF0142716
ERA C WH/A/72	PRF0142728
ERA C BL/A/52	PRF0166822
ERA C BL/A/72	PRF0166823


Era



TECHNICAL SPECIFICATIONS

60 - 80 cm	
Duct-out	
Grey, black	
▪ Aluminium grease filter included	

DIMENSIONAL DRAWING



MIN DISTANCE FROM HOB

Gas	65 cm
Induction/Radiant	50 cm

LIGHTING

Type	Led 2×3 W
Intensity	78 LUX
Temperature	2700 K

PERFORMANCE

Controls	3S Mechanical Slider
Max airflow	224 m³/h
Noise level min-max	45-54 dB(A)
Total absorption	81 W
Energy class	C

ACCESSORIES

Charcoal filter	CFC0141571

MODELS

ERA GR/A/52	PRF0142633
ERA GR/A/72	PRF0142701
ERA BL/A/52	PRF0182028
ERA BL/A/72	PRF0182023

Lane Sensor

Design Fabrizio Crisà



- **CONNEX**
- **AIRMATIC**
- **SUPER EASY INSTALLATION**
- **TOTAL CABINET INTEGRATION**
- **BLACK MATT**

TECHNICAL SPECIFICATIONS

60 - 80 cm	
Duct-out	
Stainless steel, Matt black, white	
▪ Stainless steel grease filter included	


MIN DISTANCE FROM HOB

Gas	50 cm
Induction/Radiant	45 cm

FEATURES

- Dim Light
- Perimeter Aspiration
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

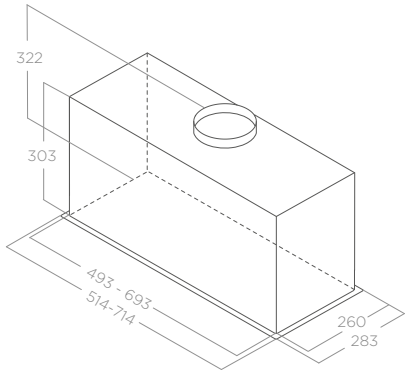

LIGHTING

Type	Strip Led 1×7 W
Intensity	365 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617

PERFORMANCE

Controls	3S+B Capacitive touch control
Max airflow	650 m^3/h
Noise level min-max	49-65 dB(A)
Total absorption	257 W
Energy class	B

MODELS

LANE SENSOR @ IX/A/52	PRF0188199A
LANE SENSOR @ IX/A/72	PRF0188201A
LANE SENSOR @ WH/A/52	PRF0207732
LANE SENSOR @ WH/A/72	PRF0207733
LANE SENSOR @ BL MAT/A/52	PRF0188472A
LANE SENSOR @ BL MAT/A/72	PRF0188480A

Lane



- SUPER EASY INSTALLATION
- TOTAL CABINET INTEGRATION
- BLACK MATT

TECHNICAL SPECIFICATIONS

60 - 80 cm	
Duct-out	
Stainless steel, matt black, white	
▪ Stainless steel grease filter included	


MIN DISTANCE FROM HOB

Gas	50 cm
Induction/Radiant	45 cm

FEATURES

- Perimeter Aspiration
- Delay Switch Off
- Maintenance Alarm

DIMENSIONAL DRAWING

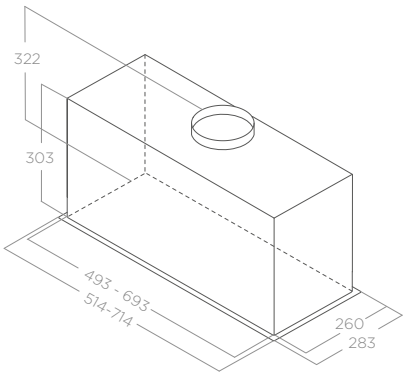

LIGHTING

Type	Strip Led 1×7 W
Intensity	365 LUX
Temperature	3500 K

ACCESSORIES

Charcoal filter	CFC0140343
Regenerable charcoal filter	CFC0162221
Air diffuser grid kit 150mm	KIT0162617

PERFORMANCE


Controls	3S+B Capacitive touch control
Max airflow	650 m³/h
Noise level min-max	49-65 dB(A)
Total absorption	257 W
Energy class	B

MODELS


LANE IX/A/52	PRF0157333
LANE IX/A/72	PRF0157377
LANE BL MAT/A/52	PRF0165830
LANE BL MAT/A/72	PRF0165834
LANE WH/A/52	PRF0157357
LANE WH/A/72	PRF0157394

Technical drawings


Boxin / Boxin Easy Dry

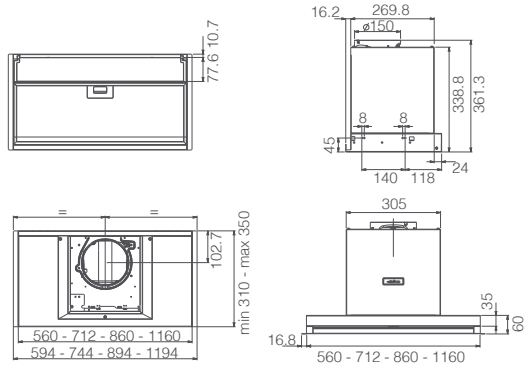


Boxin Advance Dry

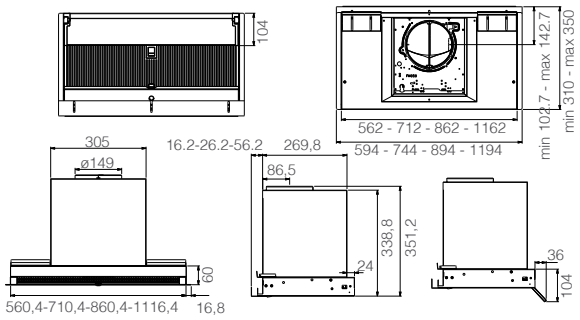


Boxin Easy Dry

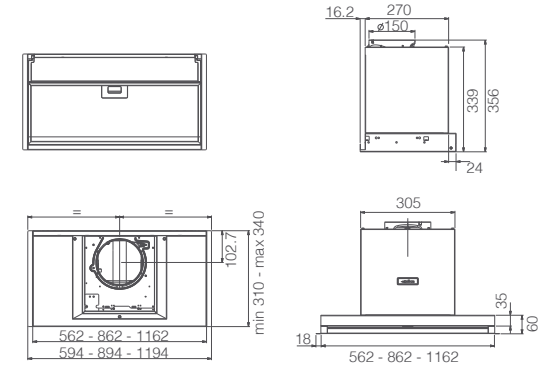


Boxin No Drip 2.0

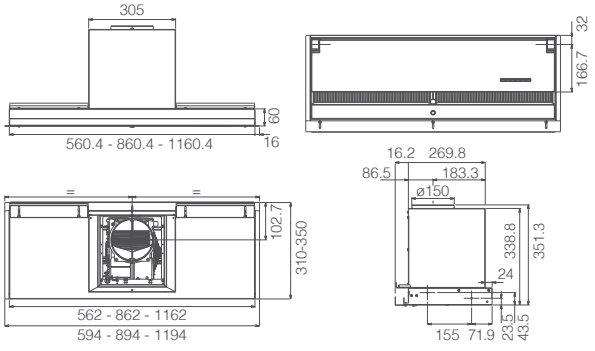


Ciak 2.0 / Ciak 2.0 S

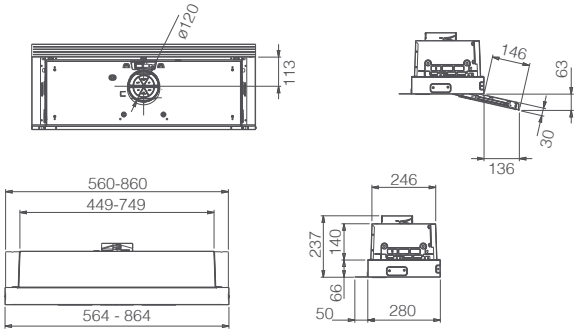


Ct35 Pro

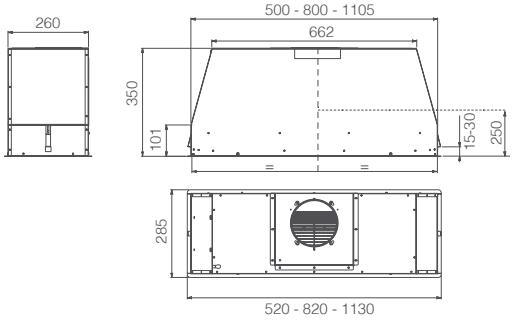


Elite 14

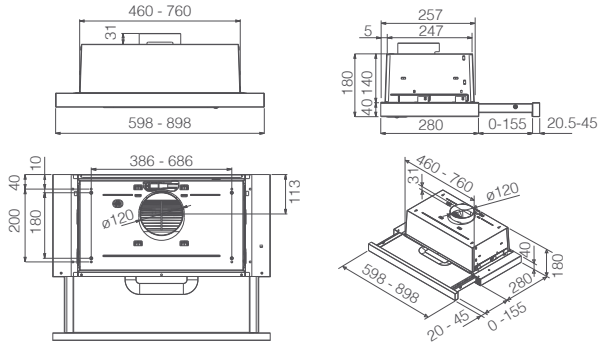


Elite 26

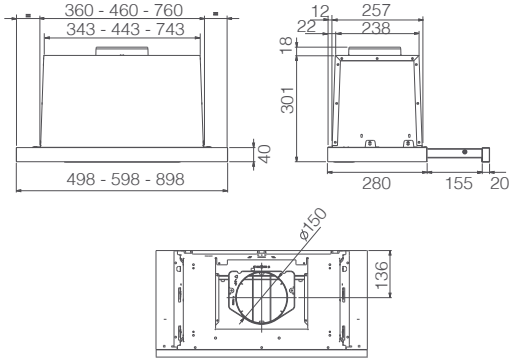


Elite 35

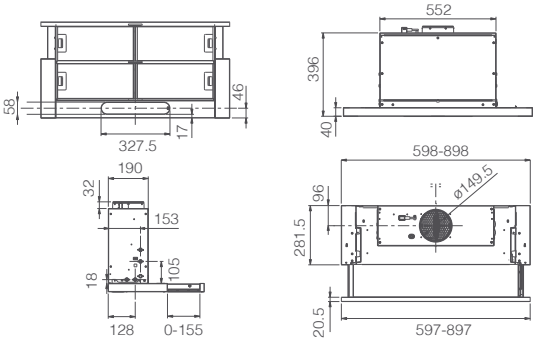


Era / Era C / Era S

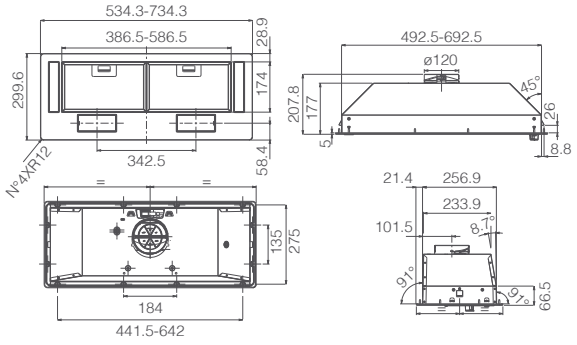


Fold / Fold S

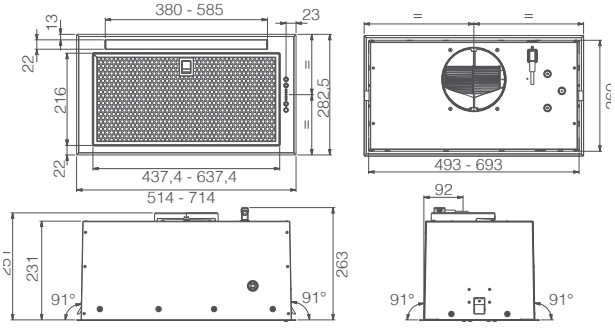


Hidden 2.0 / Hidden Advance Plus

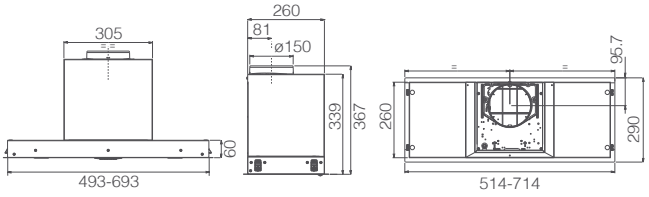


Glass Out

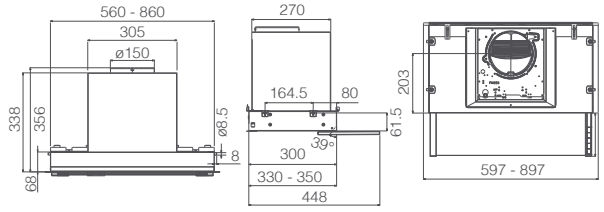

Lane /Lane Sensor

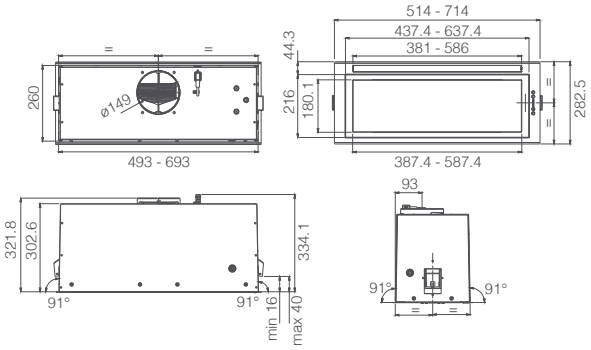

Lever

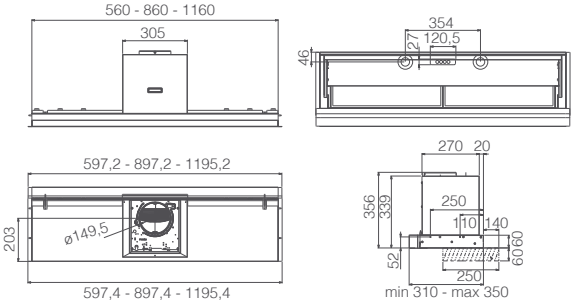

Comparative table Built-in Hoods

Built-in without cabinet base

MODEL	BOXIN	BOXIN ADVANCE DRY	BOXIN EASY DRY	BOXIN NO DRIP 2.0
SIZE (CM)	60 - 75 - 90 - 120	60 - 75 - 90 - 120	60 - 90 - 120	60 - 90 - 120
FINISHING	stainless steel, matt black	stainless steel, matt black	matt black	stainless steel, matt black
VERSION	duct-out	duct-out	duct-out	duct-out
CONTROLS	3S Mechanical rotative	3S+B Electronic Push Button	3S Mechanical rotative	3S+B Electronic Push Button
TYPE OF GREASE FILTER	GFA	GFI Anti-condensation	GFA Anti-condensation	GFI Anti-condensation
DISTANCE FROM ELECTRIC HOB	50 cm	50 cm	50 cm	50 cm
DISTANCE FROM GAS HOB	50 cm	57 cm	50 cm	62 cm
AIRFLOW MIN-MAX(BOOST) M^3/H	255 - 620	290 - 600 (710)	255 - 620	140 - 560 (700)
NOISE LEVEL MIN-MAX(BOOST) DB(A)	50 - 70	52 - 66 (69)	50 - 70	36 - 66 (71)
LIGHTING	Led 2×2,5 W	Strip Led 1×7W	Led 2×2,5 W	Strip Led 1×7 W
TOTAL ABSORPTION	255 W	257 W	255 W	286 W (60cm) 307 W (90cm) 325 W (120cm)
ENERGY CLASS: EEI	A	B	B	A
TOTAL CABINET INTEGRATION	■	■	■	■
CABINET PROTECTION	■	■	■	■
SPACE SAVING	■	■	■	■
CONNEX	–	■	–	–
DROPLESS	–	dry system	easy dry	no drip
AIRMATIC	–	■	–	–
COMFORT SILENCE	–	–	–	–
ERGONOMIC VISOR INTERFACE	–	–	–	■
BLACK MATT	■	■	■	■
LIGHTING EXPERIENCE	■	–	–	–
ROTATIVE EASY CONTROL	■	–	■	–
OTHER	–	–	–	short visor
PERIMETRAL ASPIRATION	–	–	–	–
DIMMER LIGHT	–	■	–	–
TUNE WHITE	–	–	–	–
MAINTENANCE ALARM	–	■	–	■
DELAY SWITCH OFF	–	■	–	–
BRUSHLESS MOTOR	–	–	–	–

Comparative table Built-in Hoods

Built-in with cabinet base

MODEL	CIAK 2.0	CIAK 2.0 S	CT35 PRO	ELITE 14	ELITE 26	ELITE 35	ERA	ERA C
SIZE (CM)	60 - 90	60 - 90	60 - 90 - 120	50 - 60 - 90	60 - 90	60 - 90	60 - 80	60 - 80
FINISHING	grey + glass	grey + glass	stainless steel	grey, stainless steel, black, white, grey+white glass, grey + glass, black + black glass	stainless steel + glass, stainless steel, black	grey + stainless steel, black	grey, black	stainless steel, white, black
VERSION	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out
CONTROLS	3S Mechanical Slider	3S Mechanical Slider	3S+B Electronic Push Button	3S Electronic Push Button	3S+B Elect.PB 3S Mech. PB	3S+B Electronic Push Button	3S Mechanical Slider	3S Mechanical Slider
TYPE OF GREASE FILTER	GFA	GFA	GFI professional baffle	GFA	GFA	GFA	GFA	GFA
DISTANCE FROM ELECTRIC HOB	50 cm	50 cm	50 cm	50 cm	50 cm	43 cm	50 cm	50 cm
DISTANCE FROM GAS HOB	65 cm	65 cm	65 cm	65 cm	65 cm	65 cm	65 cm	65 cm
AIRFLOW MIN-MAX(BOOST) M^3/H	130 - 225	255 - 425	225-600(650) 60cm 255-650(750) 90cm 265-650(780) 120cm	125 - 304 (LUX) 272 - 400 (PLUS)	240 - 480 (PB) 240 - 480(580)	250 - 535 (640)	125 - 224	290 - 368
NOISE LEVEL MIN-MAX(BOOST) DB(A)	47 - 55	57 - 69	51-73(75) 60cm 50-69(73) 90cm 52-69(72) 120cm	57 - 62 (LUX) 60 - 70 (PLUS)	44 - 61 (PB) 44 - 61(65)	46 - 63 (67)	45 - 54	62 - 67
LIGHTING	Led 2×3 W	Led 2×2,5 W	Strip Led 2×3 W	Led 2×3 W	Led 2×2,6 W Led 2×3 W (PB)	Led 2×3 W	Led 2×3 W	Led 2×3 W
TOTAL ABSORPTION	81 W	120 W	281 W	121 W	180 W 181 W (PB)	206 W	81 W	146 W
ENERGY CLASS: EEI	C	B	A	D (LUX) C (PLUS)	C	A	C	D
SEMI PRO	–	–	■	–	–	–	–	–
TOTAL CABINET INTEGRATION	■	■	■	–	–	–	–	–
SPACE SAVING	–	–	–	–	–	–	–	–
CONNEX	–	–	–	–	–	–	–	–
AIRMATIC	–	–	–	–	–	–	–	–
COMFORT SILENCE	–	–	–	–	–	–	–	–
BLACK MATT	–	–	–	–	–	–	–	–
LIGHTING EXPERIENCE	–	–	–	–	–	–	–	–
ROTATIVE EASY CONTROL	–	–	–	–	–	–	–	–
SUPER EASY INSTALLATION	–	–	–	–	–	–	–	–
PERIMETRAL ASPIRATION	–	–	–	–	–	–	–	–
DIMMER LIGHT	–	–	–	–	–	–	–	–
TUNE WHITE	–	–	–	–	–	–	–	–
MAINTENANCE ALARM	–	–	■	–	■	■	–	–
DELAY SWITCH OFF	–	–	■	–	■	■	–	–
BACK ASPIRATION	–	–	■	–	–	–	–	–
BRUSHLESS MOTOR	–	–	–	–	–	–	–	–

ERA S	FOLD	FOLD S	GLASS OUT	HIDDEN 2.0	HIDDEN ADVANCE PLUS	LANE	LANE SENSOR	LEVER
60 - 80	60 - 80	60 - 80	60 - 90	60 - 80	52 - 72	60 - 80	60 - 80	60 - 90 - 120
stainless steel, black	grey, matt black	stainless steel	stainless steel + glass	SS, SS + glass White, SS + matt black, SS + matt white	matt black+black glass, white+White glass, stainless steel	stainless steel, matt black	stainless steel, matt black, white	stainless steel + glass
duct-out	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out	duct-out
3S Mechanical rotative	3S Soft light push button	3S+B Electronic Push Button	3S+B Capacitive touch control	3S+B Electronic Push Button	3S+B Electronic Push Button	3S+B Capacitive touch control	3S+B Capacitive touch control	3S Mechanical push button
GFI	GFA	GFA	GFI	GFA	GFA	GFA	GFA	GFA
50 cm	45 cm	45 cm	50 cm	50 cm	43 cm	45 cm	45 cm	50 cm
65 cm	65 cm	65 cm	65 cm	65 cm	57 cm	50 cm	50 cm	50 cm
236 - 428	255 - 580	300 - 600 (710)	235 - 426 (560)	300 - 600 (690)	200 - 440 (620)	255 - 550 (650)	255 - 550 (650)	240 - 603
57 - 68	46 - 65	53 - 66 (70)	53 - 61 (65)	51 - 67 (70)	41 - 59 (66)	49-65 (68)	49-65 (68)	46-67
Led 2×3 W	Led 2×2,1 W	Strip Led 1×7 W	Led 2×2,5 W	Strip Led 1×7 W	Strip Led 1×7 W	Strip Led 1×7 W	Strip Led 1×7 W	Led 2×2,5 W
121 W	180 W	257 W	227 W	277 W	157 W	257 W	257 W	255 W
B	B	B	A	A	A+	B	B	B
–	–	–	–	–	–	–	–	–
–	■	■	–	■	■	■	■	–
–	–	–	■	■	■	–	–	■
–	–	–	–	–	■	–	■	–
–	–	–	–	–	■	–	■	–
–	–	–	–	–	■	–	–	–
–	■	–	–	■	–	■	■	–
–	–	–	–	–	■	–	–	–
■	–	–	–	–	–	–	–	–
■	■	■	–	–	–	■	■	–
–	–	–	–	■	■	■	■	–
–	–	–	–	–	■	–	■	–
–	–	–	–	–	■	–	–	–
–	–	■	■	■	■	■	■	–
–	–	■	■	■	■	■	■	–
–	–	–	–	–	–	–	–	–
–	–	–	–	–	■	–	–	–

Hoods. Accessories.

**These hoods can also be installed with remote motors in a place that best suits your needs.
An effective solution that maintains performance, with optimal acoustic comfort.**

We also offer accessories to customise your hoods, including installation solutions, chimney kits and decorative shelves. To keep your hood in working order, you will also find replacement grease and odour filters available.

Remote motors.

The choice of a remote motor, positioned according to installation needs, allows it to be placed away from the kitchen, for lower noise levels when the hood is in operation, with high fume and odour capture thanks to the extraction capacity of this type of motor. The following motors are intended exclusively for installation on compatible ceiling hoods.
It is possible to choose between 4 different types of motors based on installation needs.

Buy on Elica Shop

(*) Without bends. Deduct 1 mt. for each bend.

KIT0184296
Internal remote motor


Available for:
Hilight glass
Hilight-x
Illusion
Skydome


PERFORMANCE	
Airflow	1250 m3/h
Total absorption	275 W
Outlet	150 mm





H false ceiling	> 30cm
Outlet	Ø 15cm round
Hood-outlet distance	max 7 linear mt (*)
+ extension cable KIT0161392	





KIT0184135
GME External wall motor

Available for:
Hilight glass
Hilight-x
Illusion
Skydome


PERFORMANCE	
Airflow	1300 m3/h
Total absorption	300 W
Outlet	150 mm






H false ceiling	> 16,2cm
Outlet	Ø 15cm round
Hood-outlet distance	max 7 linear mt (*)
+ extension cable KIT0161392	





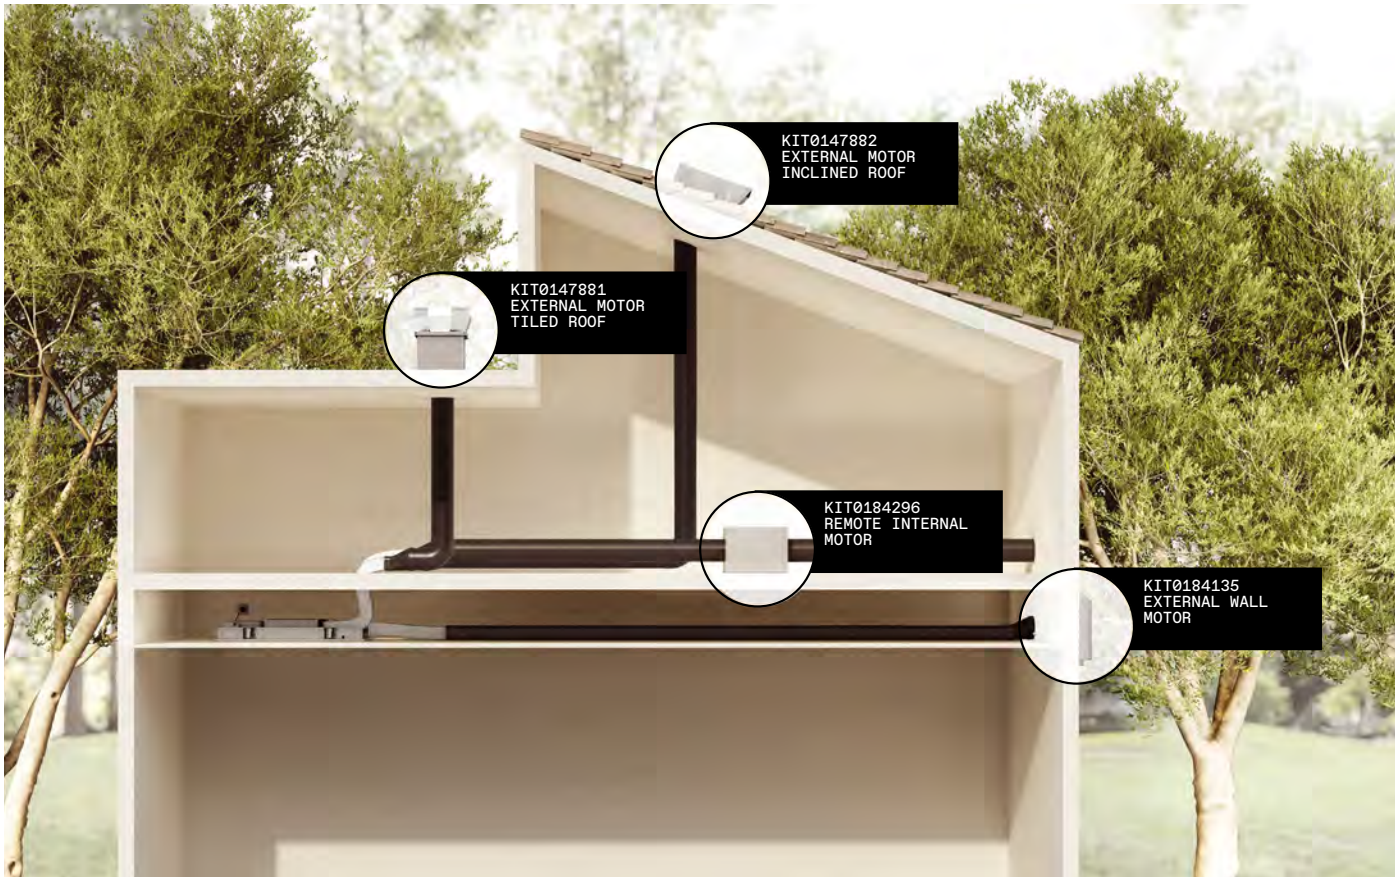

(*) Without bends. Deduct 1 mt. for each bend.

KIT0147882
GME external inclined roof motor


Available for:
Hilight glass
Hilight-x
Illusion
Skydome


PERFORMANCE	
Airflow	1200 m3/h
Total absorption	200 W
Outlet	150 mm





H false ceiling	> 16,2cm
Outlet	Ø 15cm round
Hood-outlet distance	max 7 linear mt (*)
+ extension cable KIT0161392	





KIT0147881
GME external tiled roof motor

Available for:
Hilight glass
Hilight-x
Illusion
Skydome


PERFORMANCE	
Airflow	1200 m3/h
Total absorption	200 W
Outlet	150 mm






H false ceiling	> 16,2cm
Outlet	Ø 15cm round
Hood-outlet distance	max 7 linear mt (*)
+ extension cable KIT0161392	






The following motors can only be installed on our traditional and Downdraft models already predisposed for this purpose.

Downdraft

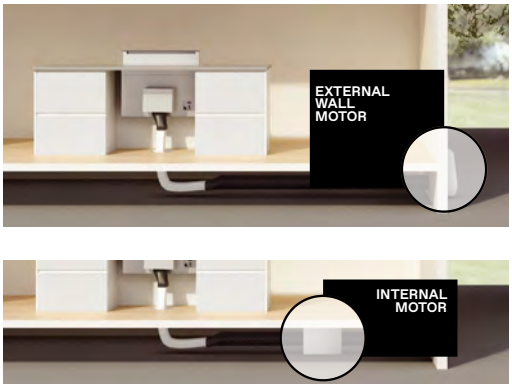

Traditional hood

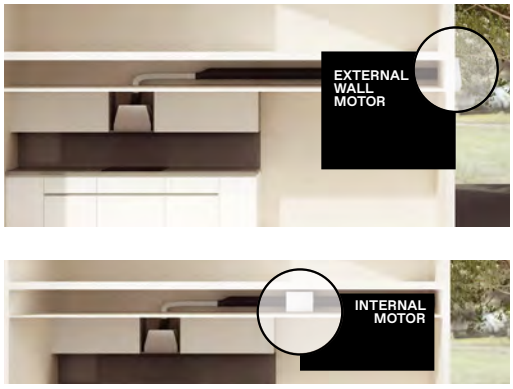

(*) Without bends. Deduct 1 mt. for each bend.

PRF0179706
GME22A external wall motor

Available for
Ct35 Pro
Pandora


PERFORMANCE	
Airflow	1200 m3/h
Total absorption	190 W
Outlet	150 mm





Outlet	Ø 15cm round
Hood-outlet distance	max 7 linear mt (*)





PRF0046491A
GME88 remote internal motor

Available for
Pandora

PERFORMANCE	
Airflow	1495 m3/h
Total absorption	250W(50Hz) 390W(60Hz)
Outlet	150 mm

PRF0006209A
GME11 remote internal motor

Available for
Ct35 Pro


PERFORMANCE	
Airflow	1000 m3/h
Total absorption	275W(50Hz)
Outlet	150 mm





Outlet	Ø 15cm round
Hood-outlet distance	max 7 linear mt (*)






Accessories

Bio
Decorative shelves


KIT0120946
Kit Shelf BIO 60CM




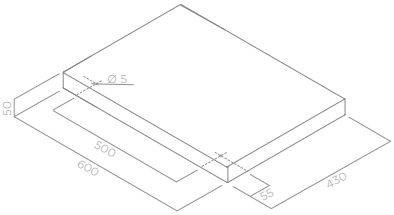

Bio Island
Decorative shelves

KIT0120947
Kit Shelf BIO ISLAND 60CM + 2 cables

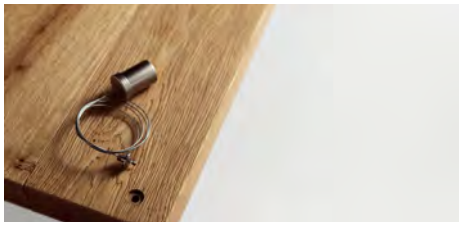



KIT0120948
Cables kit Bio Island 1,7 mt




Lullaby
Decorative shelves

KIT0147858
Kit Shelf LULLABY oak 80CM




KIT0147859
Kit Shelf LULLABY white 80CM






Element
Decorative shelves

KIT0199583
Kit Shelf ELEMENT matt black 60CM

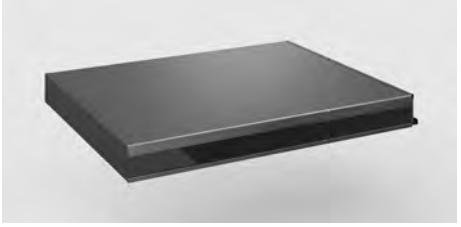

KIT0199584
Kit Shelf ELEMENT stainless steel 60CM



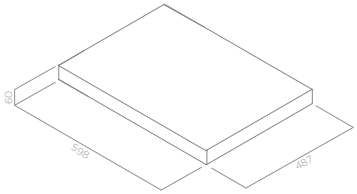

Buy on
Elica Shop


Chimney kit

KIT0010439 - LONG
Stainless steel
chimney kit

KIT0010700 - SHORT
Stainless steel
chimney kit

Available for:
Om Air






KIT0177845
Stainless steel
chimney kit

Available for:
Stripe






KIT0091876
Stainless steel
chimney kit H12

Available for:
Boxin
Boxin Advance
Boxin No Drip






KIT0141458
Stainless steel
chimney kit H185 + H185

Available for:
Boxin
Boxin Advance
Boxin Advance Dry
Boxin No Drip
Hidden 2.0
Hidden Advance
Hidden Advance Plus






KIT0166364
Black chimney kit

Available for:
Plat
Rules
Super Plat






KIT0171543
Stainless steel
chimney kit

Available for:
Plat
Rules
Super Plat






KIT0198956
Black chimney kit H66

Available for:
Aplomb
Shire
Shy-S






KIT0198957
White chimney kit H66


Available for:
Aplomb
Shire
Shy-S






Premium accessory pipes – for hoods duct-out version


KIT0120991
222×89×1000 mm




KIT0173527
222×89×500 mm




KIT0120996
Ø150×500 mm



KIT0121000
Ø150×1000mm



KIT0121001
227×94×80mm




KIT0121002
15° 227×138×94mm



KIT0121003
Ø158X59mm



KIT0121004
90° 227×288×94mm




KIT0121005
90° 227×94mm




KIT0121006
90° Ø157mm




KIT0121007
227×94 - Ø146mm




KIT0121008
227×94 Ø153mm



KIT0121009
int 216×82
ext 290×160 mm




KIT0121010
190×190 - Ø147mm



KIT0126810
227×94×190
/560 mm



KIT0161453
50 mm x 25 m



Buy on Elica Shop

Premium accessory pipes – available for all hoods

KIT0162617
Ø150

Wall unit air diffuser for built-in filtering products.
Useful for stopping objects getting into the air duct and to channel the vapour flow towards the centre of the room.




KIT0161457
Ø150×240 mm

To avoid the formation of condensation and the flowback towards the source of air output, we advise installing this component along the outlet pipe, taking care to position it horizontally to ensure correct operation.
The accessory must be installed on the motor if there is an INLINE remote motor unit.



Standard accessory pipes.
Recommended for wall-mounted, island, and built-in hoods.

KIT0214346
150×70×1500mm

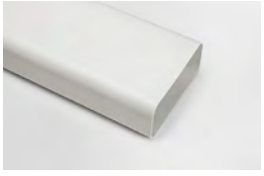

KIT0214349
150×70×1000mm



KIT0214351
90° 150×70mm



KIT0214353
150×70 - Ø125mm




KIT0214357
Ø125-100mm



KIT0214358
Ø125×1000mm



KIT0214371
Ø125×3000mm



KIT0214362
Ø125×1000mm



KIT0214365
Ø125




KIT0214366
150×70 - Ø125mm



KIT0214369
90° Ø125mm



KIT0214373
150×70mm




KIT0214354
90° 150×70mm




KIT0094727
Ø125×750mm + liens



KIT0214374
220×90×1000mm



KIT0214386
Ø150×500mm



KIT0214389
220×90mm - Ø150mm



KIT0214382
90° 220×90mm




KIT0214361
Ø150-120mm



KIT0214344
Ø150×3000mm



KIT0214385
Ø150×1000mm




KIT0214395
Ø150



KIT0214378
220×90 - Ø150mm



KIT0214376
220×90mm



KIT0214392
Ø150mm



KIT0214381
90° 220×90mm



KIT0094725
Ø150×750mm + liens



Buy on Elica Shop

Remote controls

KIT0184525A
Black remote control



KIT0184524A
White remote control





Available for:

Cloud Seven
Édith
Hilight Glass
Hilight-X
Illusion
Interstellar
Lullaby
Seashell
Skydome

L 35 x H 140 mm

The Elica remote control “basic” version is ergonomic in shape and equipped with all features. It is made of matte plastic, pleasant to the touch.
Requires UM-3AAA/IEC R03 AA/rod type batteries.

For more details on the remote control functions, please refer to the instruction manual.

Odour filters.

Charcoal filter

The traditional odour filter, made up of a mix of activated carbons, looses its efficiency through use and has an average life of 3-6 months.

Regenerable charcoal filter

Odour filter capable of regenerating itself, to reduce the frequency of replacement. To maintain its characteristics, it must be washed every 2 or 3 months with hot water and mild soap, or in the dishwasher at 65 °C, and then dried in the oven for 10 minutes at 100 °C.

Regenerable charcoal filter HP

High Performance odour filter with high filtration efficiency of 70% (EN 61591:2025), capable of regenerating itself to reduce the frequency of replacement. To maintain its characteristics, it must be washed with hot water and mild soap, or in the dishwasher at 65 °C, and then dried in the oven for 10 minutes at 100 °C.








Grease filter

KIT0010805
Aluminium grease filter

Layered aluminum grease filter (GFA). Thanks to its size, this filter can be easily washed by hand or in the dishwasher.

Available for:
Adéle / Adéle Island / Bloom
Bloom-S / Joy /Joy Island
Lol / Majestic / Missy / Spot Ng
Spot Plus Island / Spot Urban
Stripe / Stripe Urban

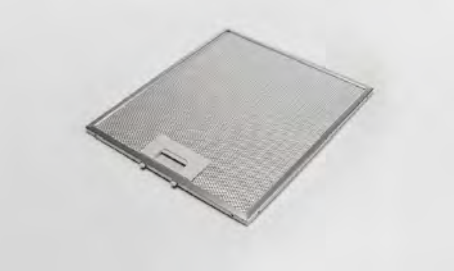

KIT0010804
Professional Baffle filter

All steel grease filter that gives the product a typical industrial hood look. Thanks to the labyrinth of steel layers, this filter has a high grease capturing capacity.

Available for:
Adéle / Adéle Island Joy / Missy
Spot Plus Island



KIT0010806
Stainless steel Professional filter

Grease filter with the first layer in steel and a microperforated back metal sheet, easily washable.

Available for:
Adéle / Adéle Island / Joy / Joy Island / Lol
Majestic No Drip / Missy / Spot Ng / Spot Plus Island / Spot Urban



Buy on Elica Shop

Ovens

A collection of models designed to bring design, functionality and smart solutions into every kitchen. From traditional, multifunction and steam combination ovens to the new microwaves, every solution is created to deliver excellent results with pizzas, roasts, fish, vegetables, desserts and much more, with great versatility and creative freedom every day.

elica
7 Years Premium Warranty

Electronic and mechanical components.
Registration within 90 days of purchase at elica.com (see p. 376).

7

Minimalist style.

The Virtus range, featuring a total black glossy or matte glass look and a minimalist style, boasts striking details such as the compact anodized aluminium handle.

Cooking under control.

The multifunction ovens manage the internal temperature precisely, swiftly reaching temperatures of up to 300°C or 320°C, depending on the model, ideal for pizza.

Solutions for everyone.

Professional-grade features – such as the food probe, humidity control and the combination of different cooking methods – are translated into functions that everyone can use, such as steam, grill and microwave.

Materials and warranties.

The strength and quality of the materials make Elica ovens reliable and safe, even for kitchen furniture. This range is eligible for a 7-year extended warranty.



Our ovens. All the advantages, in detail.



The models.

The following models are available:

- three 60×60 cm multifunction ovens, one of which is pyrolytic (self-cleaning)
- a 90×60 cm extra-large oven
- a compact 60×45 cm combination of traditional, steam and microwave oven. It can be paired with a warming drawer.

There are two control options: the simple colour TFT control or the central knob on the glass panel which accompanies the intuitive digital display.

Total Black, in matt black.

Our most iconic models feature a new finish, now also available in matte black glass: a choice designed to create perfect aesthetic alignment with the hoods and hobs in the range.

The surface, made of elegant acid-etched glass, offers a tactile, anti-glare effect that pairs perfectly with anodised aluminium elements.

Optimal heat.

The heating elements and structure of Elica ovens are made using innovative materials and technical solutions that manage internal heat optimally, with a fast temperature rise up to 320°C (ideal for baking pizza fast). The precise control and thermal inertia of these ovens, even when the door is opened, deliver excellent results in all preparations.



Food probe.

The food probe measures the internal temperature of food within 1 degree of accuracy. You can set the desired end-of-cooking temperature. This means you can leave the whole process to the oven, without having to constantly check on your food or worry about heat escaping each time you open the door, even when cooking different quantities or volumes of food. The food probe is especially recommended for meat and fish.



Humidity control.

The oven is equipped with an electronically controlled valve. You can open or close it to expel or retain the steam condensation in the oven, depending on whether you want to cook with dry heat or moist heat. In some programs, this function can be selected and adjusted during various cooking stages (e.g. for bread). In other programs, it is controlled directly by the oven to deliver consistent results (e.g. for pizza).



Always special, in every model.

Combining different cooking modes allows you to preserve the taste, texture and colour of food. The multi-level control of the traditional convection oven and deep grilling are enriched by steaming, which preserves the flavours and characteristics of meat, fish, vegetables and bread, now combined with a microwave to speed up the cooking process.

Virtus Combi Steam 645 MW TFT

Design Fabrizio Crisà

9 PRODUCT DESIGN AWARDS WINNER
Pag. 16

■

BLACK MATT

Matt black finish offering a minimal and contemporary style, while reducing reflections and simplifying cleaning.

■

MOISTURE CONTROL

Choice between moist or dry cooking, retaining or removing the condensation vapors produced inside the cavity.

■

TOUCH DISPLAY

The ergonomic TFT display offers smooth and intuitive control of all cooking functions with a simple touch.

■

COMBI 3 IN 1

Three combinable cooking methods. All in a single oven where traditional cooking meets the gentleness of steam and the practicality of the microwave.







TECHNICAL SPECIFICATIONS

60×45 cm

56×45×57 cm (cut out)

CombiSteam Microwave

Black glass, matt black glass

COOKING PROGRAMS
Microwave, steam, combi steam+microwave, combi steam + convection, combi microwave + convection, combi grill+microwave, static grill, fan grill, multiple fan, multiple fan humidity

FEATURES

- Steam
- Microwave
- Hydro Cleaning
- Food Probe

PERFORMANCE

Controls	Touch TFT
Temperature Range	30° - 250° C
Moisture Control	√
Food Probe Thermometer	√
Lighting	1 halogen
Racks	3
Guides	Integrated
Cleaning	Hydrolytic with Steam
Cavity volume	36 lt
Absorption	3,4 KW

ACCESSORIES INCLUDED

1 wire racks, 1 baking tray, 1 perforated tray, 1 glass tray, 1 trays support (glass and perforated), 1 jug, 1 silicon pipe, food probe.

ACCESSORIES

Steam Tray Supportack kit Combi 645	KIT0204309
Pyrex glass tray Combi 645	KIT0204310
Stainless steel tray Combi 645	KIT0204311
Stainless steel perforated tray Combi 645	KIT0204312

MODELS

VIRTUS COMBI STEAM MW 645 TFT BL	PRF0191769A
VIRTUS COMBI STEAM MW 645 TFT BL MATT	PRF0211107







↑ Virtus Combi Steam 60 MW TFT

Virtus Multi Pyro 60 TFT

Design Fabrizio Crisà

■

BLACK MATT

Matt black finish offering a minimal and contemporary style, while reducing reflections and simplifying cleaning.

9 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

PIZZA 320°

Precise temperature control, up to 320°C. The ideal heat for a crispy pizza.

■

MOISTURE CONTROL

Choice between moist or dry cooking, retaining or removing the condensation vapors produced inside the cavity.

■

PYRO CLEAN

Pyrolysis allows effective cleaning even of the most stubborn dirt, safely and without the use of detergents.

■

TOUCH DISPLAY

The ergonomic TFT display offers smooth and intuitive control of all cooking functions with a simple touch.







TECHNICAL SPECIFICATIONS

60×60 cm

56×59×56 cm (cut out)

Multifunction

Black glass, Matt black glass

COOKING PROGRAMS
Pizza, multiple fan, multiple fan humid, static, static humid, bottom, bottom humid, top, top humid, eco, static grill, fan grill, intensive cooking, intensive cooking humid, defrost, fast preheat

FEATURES

- Soft Closing
- Food Probe
- Sliding Guides

PERFORMANCE

Controls	Touch TFT
Temperature Range	30° - 320° C
Moisture Control	√
Food Probe Thermometer	√
Lighting	2 halogen lamps
Racks	5
Guides	Flush + 1 telescopic
Cleaning	Pyrolytic
Cavity volume	65 lt
Absorption	3,2 KW
Energy class	A+

ACCESSORIES INCLUDED

2 wire racks, baking tray, telescopic guides, food probe

ACCESSORIES

Kit telescopic guides	KIT0204339
Kit wire rack multi 60	KIT0204305
Baking tray kit multi 60	KIT0204308

MODELS

VIRTUS MULTI P 60 TFT BL	PRF0199718
VIRTUS MULTI P 60 TFT BL MATT	PRF0211108

Virtus Multi 90 TFT

Design Fabrizio Crisà

9 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

PIZZA 300°

Uniform cooking even at high temperatures. Ideal for a crispy and delicious pizza.

■

MOISTURE CONTROL

Choice between moist or dry cooking, retaining or removing the condensation vapors produced inside the cavity.

■

ULTRAWIDE COOKING

An extra-large thermally insulated cavity that maintains a constant temperature, even at 300°C. Cook more, in less time and with less energy.

■

TOUCH DISPLAY

The ergonomic TFT display offers smooth and intuitive control of all cooking functions with a simple touch.





TECHNICAL SPECIFICATIONS

90×60 cm

86×59×56 cm (cut out)

Multifunction

Black glass

COOKING PROGRAMS
Pizza, multiple fan, multiple fan humid, static, static humid, bottom, bottom humid, top, top humid, eco, static grill, fan grill, intensive cooking, intensive cooking humid, defrost, fast preheat

FEATURES

- Hydro Cleaning
- Soft Closing
- Food Probe
- Sliding Guides

PERFORMANCE

Controls	Touch TFT
Temperature Range	30° - 300° C
Moisture Control	√
Food Probe Thermometer	√
Lighting	2 halogen lamps
Racks	5
Guides	Flush
Cleaning	Hydrolytic
Cavity volume	110 lt
Absorption	3,4 KW
Energy class	A

ACCESSORIES INCLUDED

2 wire racks, 1 baking tray, 1 roasting spit, telescopic guides, food probe

ACCESSORIES

Kit telescopic guides	KIT0204339
Kit wire rack multi 90	KIT0204306
Baking tray kit multi 90	KIT0204307

MODELS

VIRTUS MULTI 90 TFT BL	PRF0191768A

Virtus Multi 60 DD

Design Fabrizio Crisà

11 PRODUCT DESIGN AWARDS WINNER

Pag. 16

■

PIZZA 300°

Uniform cooking even at high temperatures. Ideal for a crispy and delicious pizza.

■

FLOATING KNOB

Focus on design and ergonomics: the suspended knob and digital display combines aesthetics, comfort and intuitive functionality.

■

BLACK MATT

Matt black finish offering a minimal and contemporary style, while reducing reflections and simplifying cleaning.







TECHNICAL SPECIFICATIONS

60×60 cm

56×59×56 cm (cut out)

Multifunction

Black glass, Matt black glass

COOKING PROGRAMS
Pizza, multiple fan, static, static bottom, eco, static grill, fan grill, intensive cooking, fast preheat

FEATURES

Hydro Cleaning

Soft Closing

PERFORMANCE

Controls	Digital display + knob
Temperature Range	30° - 300° C
Lighting	2 halogen lamps
Racks	5
Guides	Flush
Cleaning	Hydrolytic
Cavity volume	65 lt
Absorption	3,2 KW
Energy class	A+

ACCESSORIES INCLUDED

2 wire racks, 1 baking tray

ACCESSORIES

Kit telescopic guides	KIT0204339
Kit wire rack multi 60	KIT0204305
Baking tray kit multi 60	KIT0204308

MODELS

VIRTUS MULTI 60 DD BL	PRF0191771A
VIRTUS MULTI 60 DD BL MATT	PRF0211109





Virtus Multi DD ↑→


BAKING HOLIDAYS
NEW PIE
BREW

Our microwave ovens. All the advantages, in detail.



Elica microwave ovens echo the minimalist aesthetic of the oven range, for a coordinated look and excellent ease of use.

Available in a 60×45 cm combi model with Inverter technology, and a 60×39 cm version, ideal for quick, everyday preparations.

Versatility for every preparation.

Versatile performance for VIRTUS MW 645 TC BL: a 50-litre multifunction oven combining microwave, grill and fan, for even results ranging from the most intense browning to the most delicate preparations. Featuring a TFT LCD display and anodized aluminium handle.

Intuitive, in a compact format.

Compact design for VIRTUS MW 638 TB BL: a 25-litre model (38 cm high), designed to optimise space, with a handle-free touch-to-open door and flush finish for a harmonious integration and an always tidy kitchen.



Smart automation.

Both models feature automatic programs and smart sensors that adjust time and power based on the type and weight of the food, delivering even cooking.

Virtus Combi Microwave 645

Design Fabrizio Crisà



- **COMBI MICROWAVE**
- **TOUCH DISPLAY**
- **WIDE COOKING**
- **INVERTER TECHNOLOGY**

9 PRODUCT DESIGN AWARDS WINNER

Pag. 16

TECHNICAL SPECIFICATIONS

60×45 cm

56×45×57 cm (cut out)

Combi microwave

Black glass

COOKING PROGRAMS
Static, Fan, Fan Assisted, Grill, Double Grill with Fan, Double Grill, Bottom Heat with Fan, Bottom Heat, Microwave with Fan, Microwave with Double Grill and Fan, Microwave with Bottom Heat and Fan, Microwave, Defrost + 13 Automatic Programs

FEATURES

Microwave

Automatic Programs

PERFORMANCE

Controls	Touch TFT
Temperature Range	30° - 250° C
Power max.	900 W
Grill Power max.	2200 W
Lighting	2 halogen
Racks	5
Guides	Flush
Cavity volume	50 lt
Absorption	3 KW

ACCESSORIES INCLUDED

- 1 enamelled baking tray
- 1 glass baking tray
- 1 wire rack

MODELS

Baking tray kit Microwave 45	KIT0214542
Glass baking tray kit Microwave 45	KIT0214543
Kit wire rack Microwave 45	KIT0214544

MODELS

VIRTUS MW 645 TC BL	PRF0211111

Virtus Microwave 638



■ **TOUCH TO OPEN**

TECHNICAL SPECIFICATIONS

60×39 cm

56×38×55 cm (cut out)

Microwave with grill

Black glass

COOKING PROGRAMS
Cooking (Grill/Combi), Defrosting (weight/time), 8 Automatic programs, Fast cooking, Multi-stage cooking.

FEATURES

Microwave

Automatic Programs

PERFORMANCE

Controls	Touch
Programs / Power	P100=900W / P80=720W / P50=450W / P30=270W / P10=90W
Power max.	900 W
Grill Power max.	1000 W
Lighting	1 led
Racks	1
Cavity volume	25 lt
Absorption	1,45 KW

ACCESSORIES INCLUDED

- 1 turntable
- 1wire rack

MODELS

VIRTUS MW 638 TB BL	PRF0211112

Virtus Warm Drawer



■ **BLACK MATT**

TECHNICAL SPECIFICATIONS
60×14,3 cm
56×14,5×56 cm (cut out)
Warming drawer
Black glass, Matt black glass

PERFORMANCE	
Controls	On-Off Button
Temperature Range	30° - 85° C
Load capacity max.	25 Kg
Cavity volume	36 lt
Absorption	400 W

MODELS	
VIRTUS WARM DRAWER 60 PP BL	PRF0191772
VIRTUS WARM DRAWER 60 PP BL MATT	PRF0211110

Accessories


KIT0204305
Wire Rack kit
Multi 60



KIT0204306
Wire Rack kit
Multi 90



KIT0204308
Baking tray kit
Multi 60



KIT0204307
Baking tray kit
Multi 90



KIT0204309
Steam Tray
Support kit
Combi 645



KIT0204310
Pyrex glass tray
Combi 645



KIT0204311
Stainless steel
tray Combi 645



KIT0204312
Stainless steel
perforated tray
Combi 645



KIT0215859
Kit deep baking
tray stainless
steel multi 60



KIT0204339
Guide
telescopic kit



KIT0214542
Baking tray kit
Microwave 45



KIT0214543
Glass baking tray kit
Microwave 45



KIT0214544
Wire rack kit
Microwave 45




KIT0213395
Descalcifier




Buy on
Elica Shop

Technical drawings


Virtus Combi Steam 60 MW TFT

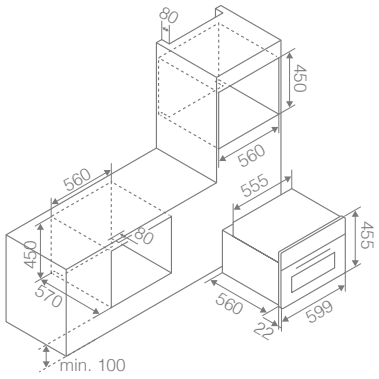


Virtus Multi Pyro 60 TFT

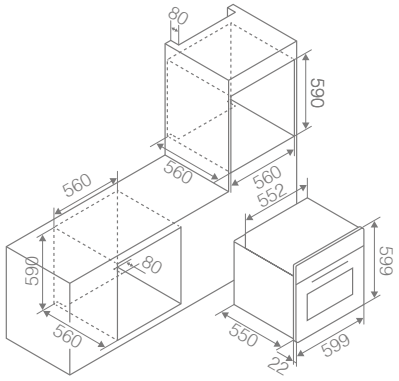


Virtus Multi 90 TFT

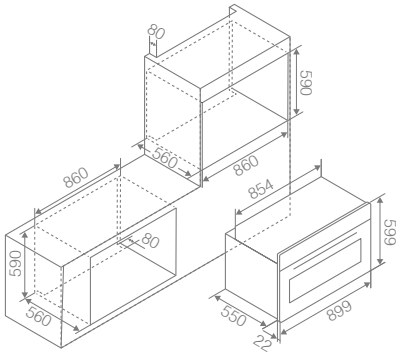


Virtus Multi 60 DD

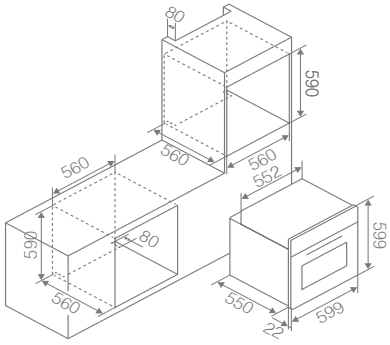


Virtus Combi Microwave 645

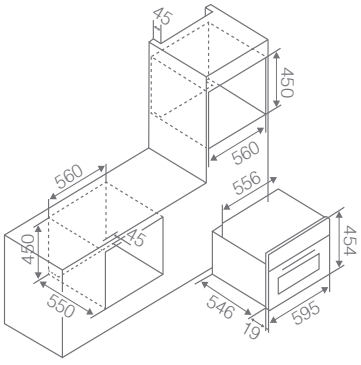

Virtus Microwave 638

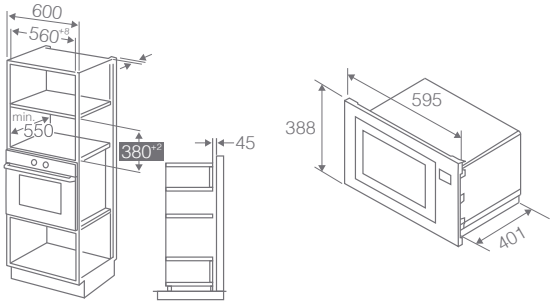

Virtus Warm Drawer



Comparative table Ovens

MODEL	VIRTUS COMBI STEAM 60 MW TFT	VIRTUS MULTI PYRO 60 TFT	VIRTUS MULTI 90 TFT	VIRTUS MULTI 60 DD	VIRTUS COMBI MICROWAVE 645	VIRTUS COMBI MICROWAVE 638	VIRTUS WARM DRAWER
SIZE (CM)	60×45×56	60×60×55	90×60×55	60×60×55	60×45×56	60×39×40	60×14,3×55
CUT SIZE (CM)	56×45×57	56×59×56	86×59×56	56×59×56	56×45×57	56×38×55	56×14,5×56
FINISHING	black glass / glass matt black	black glass / glass matt black	black glass	black glass / glass matt black	Black glass	Black glass	black glass / glass matt black
CONTROLS	TOUCH TFT	TOUCH TFT	TOUCH TFT	DIGITAL DISPLAY + KNOB	DISPLAY DIGITAL TOUCH	DISPLAY LED TOUCH	–
CAPACITY	36 L	65 L	110 L	65 L	50 L	25 L	25 Kg
TEMPERATURE RANGE	30°-250°	30°-320°	30°-300°	30°-300°	30°-250°	–	30°-85°
LIGHTHING	1 halogen lamp	2 halogen lamps	2 halogen lamps	2 halogen lamps	1 halogen lamp	Led	–
ENERGY CLASS: EEI	–	A+	A	A+	–	–	–
COOKING PROGRAMS	10	16	16	9	13	8	–
ABSORPTION	3400 W	3300 W	3400 W	3200 W	2950 W / 3150 W	1475 W	400 W
FOOD PROBE	yes	yes	yes	–	–	–	–
GRILL	1	1	2	1	1	–	–
ENAMELLED BAKING TRAY	–	1	1	1	1	–	–
STAINLESS STEEL STEAMING TRAY	1	–	–	–	–	–	–
STAINLESS STEEL TRAY	1	–	–	–	–	–	–
PYREX TRAY	1	–	–	–	1	–	–
STEAM COOKING SET	1	–	–	–	–	–	–
GLASS TURNTABLE PLATE	–	–	–	–	–	1	–
ROASTING SPIT	–	–	yes	–	–	–	–
MOISTURE CONTROL	■	■	■	■	–	–	–
PYRO CLEAN	–	■	–	–	–	–	–
BLACK MATT	■	■	–	■	–	–	■
PIZZA 300	–	–	■	■	–	–	–
PIZZA 320	–	■	–	–	–	–	–
COMBI MICROWAVE	–	–	–	–	■	–	–
COMBI 3 IN 1	■	–	–	–	–	–	–
ULTRAWIDE COOKING	–	–	■	–	–	–	–
TOUCH DISPLAY	■	■	■	–	■	–	–
FLOATING KNOB	–	–	–	■	–	–	–
WIDE COOKING	–	–	–	–	■	–	–
INVERTER	–	–	–	–	■	–	–
TOUCH TO OPEN	–	–	–	–	–	■	–
HYDRO CLEANING	■	–	■	■	–	–	–
MICROWAVE	■	–	–	–	■	■	–
SLIDING GUIDES	–	■	■	–	–	–	–
SOFT CLOSING	–	■	■	■	–	–	–

Wine Coolers

Total black glass, minimalist yet bold style, and functional details with a stunning wow factor: Elica wine coolers are the new stars in the kitchen.

elica
7 Years Premium Warranty

Electronic and mechanical components.
Registration within 90 days of purchase at elica.com (see p. 376).

8

Versatile models.

The range expands with Built-In and Built-Under solutions, designed to meet increasingly integrated kitchen projects and new space requirements, enhancing design, performance and ease of use. Available in different sizes and configurations.

Essential, with style.

The entire range is distinguished by a total black glass look, a linear style and refined details like the compact anodized aluminium handle.

The wine habitat.

Elica wine coolers offer a stable and controlled environment for storing wines. They keep the humidity and temperature stable, expertly control internal lighting to protect wines from external light, and eliminate micro-vibrations (so as not to alter the structure, colour, and organoleptic properties of the wine).



Wine Cooler
All the advantages, in detail





Protection against microvibrations.

Bottles need to be completely stable: even small vibrations can harm the wine by disturbing the sediment in the bottle. This causes the components to mix, upsetting the balance achieved during the ageing period. The exceptionally stable cooling system and the wooden shelves are essential for proper preservation and extraction operations.

Everything under control.

The integrated ventilation system keeps humidity constant between 60% and 80%, preventing both oxidation caused by cork deterioration and the formation of mould. At the same time, the organoleptic integrity of each bottle is preserved thanks to the special door glass that filters UV rays, while the internal LED cold lighting enhances label visibility without affecting the internal temperature.

Bi-zone: perfect conditions.

Dual temperature, zero compromises. Thanks to the Bi-zone system with two independent compartments, you can store and serve different wine varieties at their ideal temperature, preserving optimal conditions.



Touch to open.

In our Built-in models, a simple touch is enough to open the door: minimalist aesthetics and a simple, natural gesture.



Self-ventilated system

Complete integration, pure aesthetics. The self-ventilation system of our Built-in models enables a precise, tidy column installation. With no visible grills, the kitchen design maintains clean lines and a distinctive, rigorous look.

Veritas BI660

Design Fabrizio Crisà



- **WIDE AND FLEXIBLE CAPACITY**
- **BI-ZONE**
- **TOUCH TO OPEN**
- **SELF VENTILATED**

TECHNICAL SPECIFICATIONS
60×60 cm
56×59×57 cm (cut out)
Built-in
Black glass

FEATURES

- Reversible Door
- Temperature Control
- Lighting Care
- Humidity Care
- No Vibration
- Dim Light

PERFORMANCE		
Energy class	F	
Controls	Touch control with LCD	
Number of zones	2	
Temperature Range	Top: 5°-12°C	Bottom: 12°-20°C
Number of bottles	24	
Racks	4 levels: 3 oak wood racks + base	
Guides	3 Telescopic rails	
Lighting	Led, 3000 K	
Noise level	37 dB(A)	
Total absorption	130 W	
Volume	83 Lt	

MODELS	
VERITAS BI660 BL	PRF0200589

Veritas BI645

Design Fabrizio Crisà



- **WIDE AND FLEXIBLE CAPACITY**
- **TOUCH TO OPEN**
- **SELF VENTILATED**

TECHNICAL SPECIFICATIONS

60×45 cm
56×45×56 cm (cut out)
Built-in
Black glass

FEATURES

- Reversible Door
- Temperature Control
- Lighting Care
- Humidity Care
- No Vibration
- Dim Light

PERFORMANCE

Energy class	F
Controls	Touch control with LCD
Number of zones	1
Temperature Range	5°-20°C
Number of bottles	21
Racks	3 levels: 2 oak wood racks + base
Guides	2 Telescopic rails
Lighting	Led, 3000 K
Noise level	37 dB(A)
Total absorption	60 W
Volume	53 Lt

MODELS

VERITAS BI645 BL	PRF0200588

Veritas BU682

Design Fabrizio Crisà



- **WIDE AND FLEXIBLE CAPACITY**
- **BI-ZONE**

TECHNICAL SPECIFICATIONS
60×82 cm
60×81,5×60 cm (cut out)
Built-in under-counter unit
Black glass

FEATURES
Reversible Door
Temperature Control
Lighting Care
Humidity Care
No Vibration
Dim Light

PERFORMANCE		
Energy class	F	
Controls	Touch control with LCD	
Number of zones	2	
Temperature Range	Top: 5°-12°C	Bottom: 12°-20°C
Number of bottles	46	
Racks	5 levels: 4 oak wood racks + base	
Guides	4 Telescopic rails	
Lighting	Led, 3000 K	
Noise level	38 dB(A)	
Total absorption	100 W	
Volume	145 Lt	

MODELS	
VERITAS BU682 BL	PRF0200587

Veritas BU382

Design Fabrizio Crisà



■ **BI-ZONE**

TECHNICAL SPECIFICATIONS
30×82 cm
30×81,5×57,5 cm (cut out)
Built-in under-counter unit
Black glass

PERFORMANCE		
Energy class	F	
Controls	Touch control with LCD	
Number of zones	2	
Temperature Range	Top: 5°-12°C	Bottom: 12°-20°C
Number of bottles	16	
Racks	5 levels: 4 oak wood racks + base	
Guides	4 Telescopic rails	
Lighting	Led, 3000 K	
Noise level	38 dB(A)	
Total absorption	130 W	
Volume	58 Lt	

FEATURES
Reversible Door
Temperature Control
Lighting Care
Humidity Care
No Vibration
Dim Light

MODELS	
VERITAS BU382 BL	PRF0200586






Veritas BU382 ↑ →




Technical drawings.


Veritas BI660

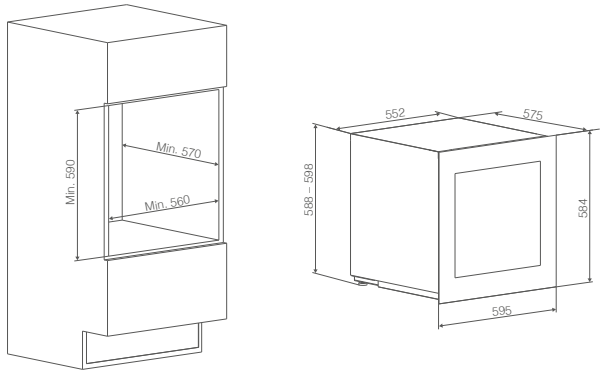


Veritas BI645

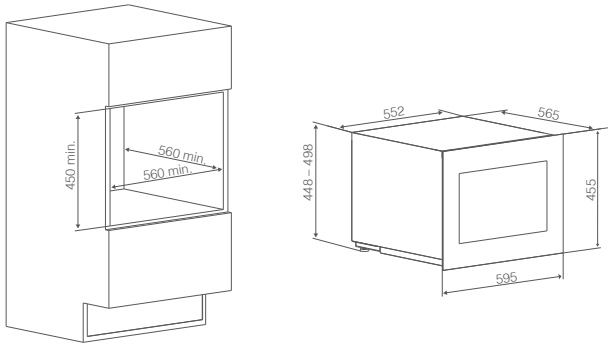

Veritas BU682

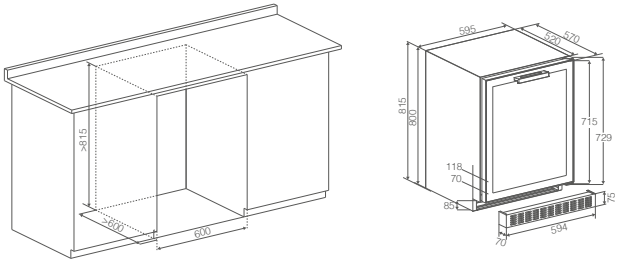

Veritas BU382

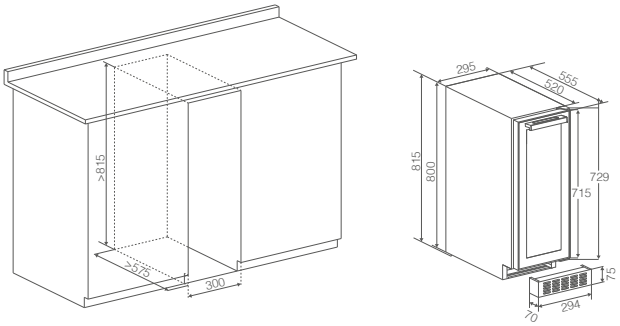

Comparative table Wine Coolers

MODEL	VERITAS BI660	VERITAS BI645	VERITAS BU682	VERITAS BU382
INSTALLATION	Built-in	Built-in	Built-in under-counter unit	Built-in under-counter unit
SIZE (CM)	60×60	60×45	60×82	30×82
FINISHING	black glass	black glass	black glass	black glass
NUMBER OF BOTTLE	24	21	46	16
VOLUME	83 L	53 L	145 L	58 L
NUMBER OF ZONE	2	1	2	2
TEMPERATURE RANGE	5°-12° / 12°-20°	5°-20°	5°-12° / 12°-20°	5°-12° / 12°-20°
SHELVES	4	3	5	5
SHELVES MATERIALS	varnished oak	varnished oak	varnished oak	varnished oak
NUMBER OF GUIDES	3	2	4	4
TYPE OF GUIDES	telescopic	telescopic	telescopic	telescopic
CONTROLS	Electronic Touch control with LCD	Electronic Touch control with LCD	Electronic Touch control with LCD	Electronic Touch control with LCD
DOOR OPENING TYPE	push to open	push to open	handle	handle
NUMBER OF GLASS PANELS	2	2	2	2
NOISE LEVEL DB(A)	37	37	38	38
LIGHTHING	Strip Led 3000 K	Strip Led 3000 K	Strip Led 3000 K	Strip Led 3000 K
TOTAL ABSORPTION	130 W	60 W	100 W	130 W
ENERGY CLASS: EEI	F	F	F	F
SELF-CLOSING DOOR	■	■	–	–
VISUAL AND AUDIBLE ALARM	■	■	■	■
CHILD LOCK	■	■	■	■
BASE ADJUSTMENT	■	■	■	■
CHARCOAL FILTER	■	■	–	–
REVERSIBLE DOOR	■	■	■	■
TEMPERATURE CONTROL	■	■	■	■
LIGHTING CARE	■	■	■	■
DIM LIGHT	■	■	■	■
HUMIDITY CARE	■	■	■	■
NO VIBRATION	■	■	■	■

Elica for You

9

Maintenance, customer service and support: Elica is here for you, even after your purchase. So you get the best, over time.

Warranty.

Protect your choice with the Elica warranty extension!
Choose an Elica product and register it within 90 days of purchase on elica.com to obtain extra coverage on electronic and mechanical components, without prejudice to the legal guarantee of conformity provided in the country of purchase.



elica
7 Years Warranty

Buy a NikolaTesla or an Elica hood together with an Elica hob, oven or wine cabinet at the same retailer and take advantage of the warranty extension up to 7 years on these additional products too.

Visit our website for more details.

We recommend always checking our website, elica.com, to verify the specific terms and conditions relating to registration and the extended warranty.

Immediate benefits and qualified support.

Registration not only ensures immediate benefits, but also establishes a direct communication channel with our customer service team, ready to offer you qualified support and assistance.

With Elica, 7 year warranty on induction hobs, ovens and wine cabinets!

Get the most out of your products with an extended warranty covering the electronic and mechanical components of your appliances, by registering your purchase within 90 days on elica.com.

Register your product now

elica
5 Years Warranty

By your side, over time.

This extra warranty reflects our commitment to supporting Elica products and our customers over time, covering electronic and mechanical components.
Terms and conditions at elica.com.



Extend the warranty on your NikolaTesla and Lhov up to 5 years!

Make the most of the extra warranty on your purchase by registering your NikolaTesla or Lhov hob with integrated extraction within 90 days of purchase. By registering within this period, Elica offers you 5 years of coverage on electronic and mechanical components, without prejudice to the legal guarantee of conformity provided in the country of purchase.



Reserved Area.

The Reserved Area is the space for all those who, like you, have made Elica products one of the key strengths of their business.

Register as a Trade or Architect/Designer and inside you will find:

Configurator

We support you in the design phase of your space. The Elica configurator becomes an indispensable tool for identifying the product and accessories best suited to your needs, ensuring their correct installation and, consequently, optimal operation.

Downloads

Define your project in detail. Go to the download area to download the technical data files needed to define your project.

Installation video

See how simple it is with a video. We have created videos to help you during the installation phase. Find the solution you are looking for. And much more.

Training videos

Explore this section to find in-depth videos about our products and stay up to date on all the latest news.

Enter the Reserved Area to discover all dedicated services.

Maintenance.

To keep your Elica products working correctly over time, the first step is to take care of the filtering system.



Products installed in filtering version feature two types of filter:
the grease filter which removes the grease from the air dispersed during cooking and the odour filter. Both must be regularly cleaned and replaced to ensure consistently high performance.

- The grease filter protects your hood by trapping grease particles. The grease filter can be made of aluminium or stainless steel and requires periodic cleaning by hand with a neutral detergent or in the dishwasher at a low temperature (*), or alternatively in a paper version. In this case, it must be replaced every month based on use.

- The odour filter with activated charcoal, installed on filtering hoods, captures and traps odour particles in the air. Replace it every 3-6 months depending on use, as indicated in the manual. Regenerable odour filters can be washed and regenerated according to the instructions, reducing the frequency of replacement.

A few simple, minor precautions are all it takes to keep your product in good condition and working efficiently over time.

(*) Always check how to wash the filter in the product instruction manual.


Energy label.

The Energy Label constitutes a fundamental tool for choosing the product for the user's needs.
The label provides instant information on energy consumption and the level of efficiency of the product's performances.

Each page of our catalogue contains the energy class of the product presented.
For obtaining detailed information on each version of the desired model, including all the parameters appearing on the energy label, proceed as follows:


- Identify the product code of the relevant model, on www.elica.com
- Visit the website www.elica.com and go to the DOWNLOADS section of the ASSISTANCE page, enter the product code in the search field and download the PDF document (Product Fiche) listing all the product features, as per EU regulations no. 65/2014 and 66/2014.

HOODS
ASPIRATION HOBS
INDUCTION HOBS

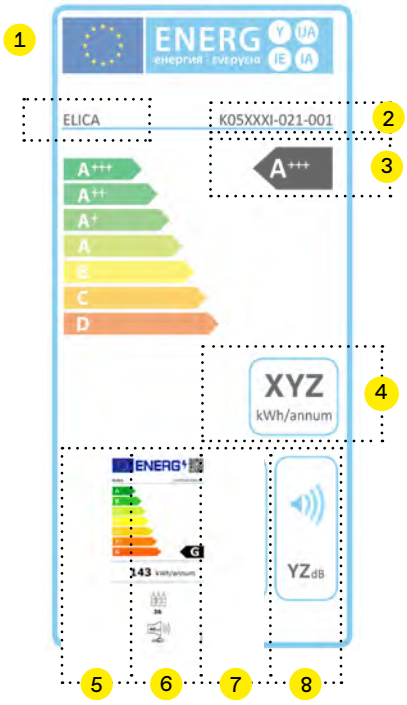


1	SUPPLIER NAME OR BRAND	
2	MODEL IDENTIFICATION CODE	
3	ENERGY EFFICIENCY CLASS	
4	ESTIMATED ANNUAL ENERGY CONSUMPTION	
5	FLUID DYNAMIC EFFICIENCY CLASS	
6	LIGHTING EFFICIENCY CLASS	
7	GREASE FILTERING EFFICIENCY CLASS	
8	NOISE LEVEL	

WINE CELLARS

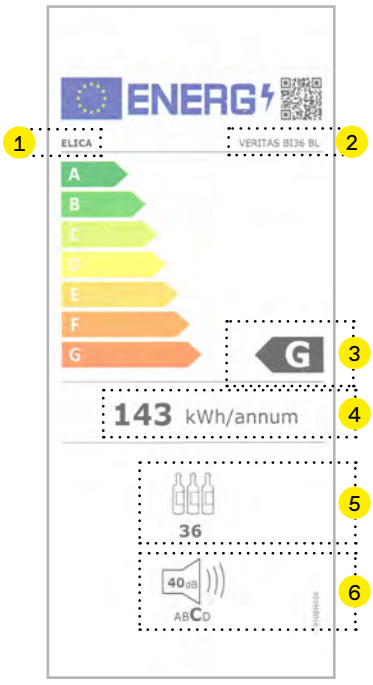

1	SUPPLIER NAME OR BRAND	
2	MODEL IDENTIFICATION CODE	
3	ENERGY EFFICIENCY CLASS	
4	ESTIMATED ANNUAL ENERGY CONSUMPTION	
5	NOISE LEVEL	
6	NUMBER OF BOTTLES	

OVENS

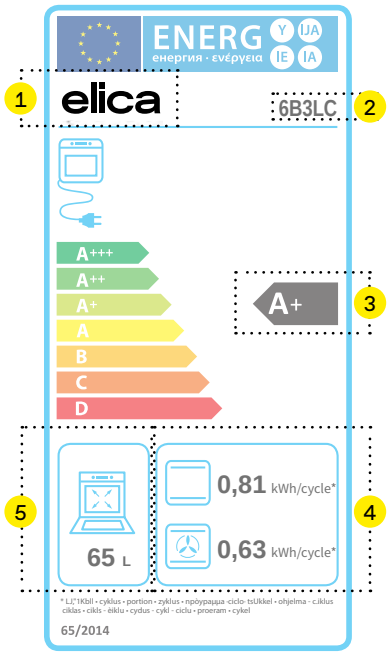

1	SUPPLIER NAME OR BRAND	
2	MODEL IDENTIFICATION CODE	
3	ENERGY EFFICIENCY CLASS	
4	ESTIMATED ANNUAL ENERGY CONSUMPTION	
5	CAVITY VOLUME	

NOVEMBER 2026

ZAMMC1161

FREE SAMPLE

This catalogue is of exclusive property of Elica spa. All rights are reserved.

Any form of total or partial reproduction of catalogue is strictly forbidden.

The printing process cannot always faithfully reproduce hues and original materials.

Some images in this catalogue may have been created or modified using artificial intelligence tools. All images are for illustrative purposes only: colours and finishes may differ from the actual product. For technical specifications, the product technical data sheets shall prevail.

Elica reserves the right to make changes to the data and details of the products in this catalogue even without prior notice.

Elica S.p.A.
Via Ermanno Casoli, 2
60044 Fabriano AN Italy

Being extraordinary is a mindset, a way of being and thinking.