falmec

LINE PRO

Version
Island 120 cm - 950 m^3/h
Collection
Professional
EAN code
8034122355207

FEATURES

Scotch brite stainless steel (AISI 304)
Electronic control
LED lighting
Oil collector
Baffle filter

OPTIONAL ACCESSORIES

KACL.815
Protective cleaning cloths for stainless steel (box 10 pcs)
KACL.770#41F
Remote under-roof 1100 m^3/h Brushless

KACL.786#41F
Outdoor extractor fan 1000 m^3/h

KACL.796#4AF
Outdoor extractor fan 1500 m^3/h

KACL.797#4AF
Remote under-roof motor 1300 m^3/h

TECHNICAL FEATURES

Installation type
Island
Dimensions
120
Finishing
Scotch brite stainless steel (AISI 304)
Motor
1000 m^3/h
Type of control
Electronic control
Lighting
Led 6x1,2 W (3200 K)
Filter
Metallic filter "Buffle" - 350x350 mm - 2 pz
Minimum distance
Gas hod: 63 cm
Electric hob: 52 cm

PACKAGING: WEIGHTS AND VOLUMES

Gross weight
49 kg
Net weight
44 kg
Volume
0,57 m^3
Packaging size
Length
1330 mm
Height
725 mm
Depth
595 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
320 W
Current
220-240V
Frequency
50/60Hz
Plug type
Shuko

MOTOR TECHNICAL SHEET

Maximum capacity
860 m^3/h
I.E.C. 61591
Maximum noise
69 dB(A)re1pW
I.E.C.60704-2-13
Maximum pressure (Pa)
600 Pa
Maximum power motor
260 W
ENERGY CLASS
A



falmec

LINE PRO

Version
Island 120 cm - 950 m^3/h
Collection
Professional
EAN code
8034122355207

MOTOR
TECHNICAL SHEET

Speed motor	1	2	3	4
Noise dB(A)re1pW-I.E.C.60704-2-13	53	58	64	69
Capacity (m3/h) I.E.C.61591 Tubazioni normalizzate	350	470	620	860
Maximum pressure (Pa)	500	540	560	600
Power motor (W)	185	215	240	260
Air outlet	150	150	150	150

CAPACITY / PRESSURE

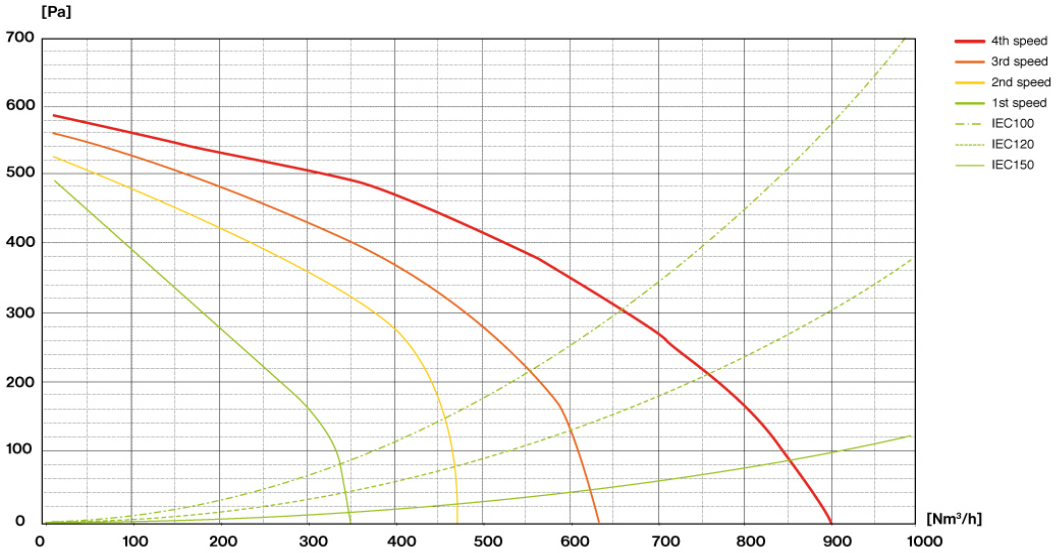

falmec

LINE PRO

Version
Island 120 cm - 950 m^3/h
Collection
Professional
EAN code
8034122355207

ENERGY LABEL

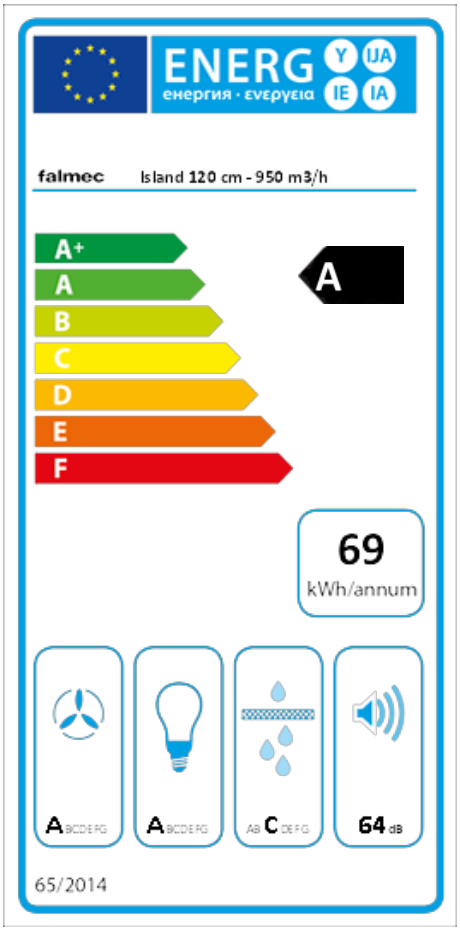

PF		
S	Falmec Spa	
M	Island 120 cm - 950 m^3/h	
AEC	68,9	kWh/a
ECC	A	
FDE	29,3	
FDEC	A	
LE	39,0	
LEC	A	
GFE	74,0	
GFEC	C	
Qmin	350,0	m^3/h
Qmax	620,0	m^3/h
Qboost	860,0	m^3/h
SPEmin	53	dBa
SPEmax	64	dBa
SPEboost	69	dBa
PO	-	W
PS	0,68	W
PI		
F	0,9	
EEI	54,6	
Qbep	473,0	m^3/h
Pbep	435	Pa
Qboost	860,0	m^3/h
Wbep	195,0	W
WL	6,70	W
Emiddle	208	lex
Lwa-SPEmax	64	dBA

PF_Product fiche according to 65/2014 / S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency Qmin_Air flow (in m3/h) at min speed in normal use / QQmax_Air flow (in m3/h) at max speed in normal use / Qboost_Air flow (in m3/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A -weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A- weighted sound power emissions at max speed in normal use / SSPEboost_Airbone acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / P0_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps) / **PI_Additional information according to 66/2014** / F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point maximun air flow / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.