

FLIPPER NRS

Version

Wall 85 cm - Black - 800 m³/h

Collection

Silence - NRS

EAN code

8034122353739

FEATURES

NRS technology for a quieter kitchen
Electronic control
LED lighting
Metallic grease filter, removable and washable
Optional charcoal filter
Black tempered glass with steel central band

OPTIONAL ACCESSORIES

KACL.570#I

Extension H700 - Wall

KACL.571#I

Extension H960 - Wall

KACL.400

Silent / Conveyer NRS

101078897

High performance filter

TECHNICAL FEATURES

Installation type

Wall

Dimensions

85 cm

Finishing

Black tempered glass with Stainless Steel central band

Motor

800 m³/h

Type of control

Electronic control

Speed settings

4

Lighting

Led 2x1,2 W - 3200 K

Filter

Metallic filter "Base" - 284x234 mm - 2 pz

Charcoal filter

High performance filter

Minimum distance

Gas hob: 52 cm

Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight

47.00 kg

Net weight

40.00 kg

Volume

0.69 m³

Packaging size

Length

1030 mm

Height

975 mm

Depth

685 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

280 W

Voltage / Frequency

220-240V

50-60Hz

Plug type

Shuko

MOTOR TECHNICAL SHEET

Maximum capacity

610 m³/h

I.E.C. 61591

Maximum noise level

54,5 dB(A)re1pW

I.E.C.60704-2-13

Maximum pressure (Pa)


510 Pa

Max. motor power

224 W

ENERGY CLASS

B



FLIPPER NRS

Version

Wall 85 cm - Black - 800 m³/h

Collection

Silence - NRS

EAN code

8034122353739

MOTOR TECHNICAL SHEET

Motor speed	1	2	3	4
Noise level dB(A)re1pW-I.E.C.60704-2-13	37	41	46	54,5
Capacity (m3/h) I.E.C.61591 Normalized Pipes	220	290	375	610
Maximum pressure (Pa)	390	440	490	510
Motor Power (W)	130	150	178	224
Air outlet	150	150	150	150

FLIPPER NRS

Version

Wall 85 cm - Black - 800 m³/h


Collection

Silence - NRS

EAN code

8034122353739

ENERGY LABEL

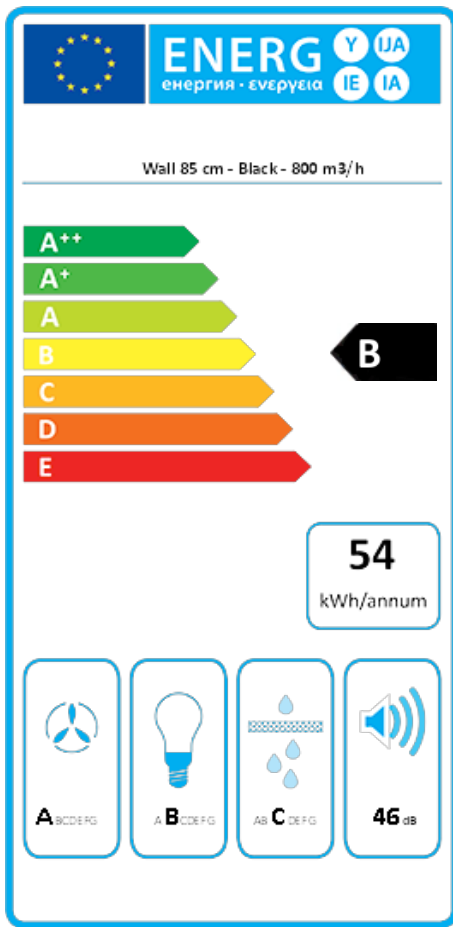

PF		
S	Falmec Spa	
M	Wall 85 cm - Black - 800 m ³ /h	
AEC	53,9	kWh/a
ECC	B	
FDE	28,3	
FDEC	A	
LE	21,6	
LEC	B	
GFE	82,0	
GFEC	C	
Qmin	220,0	m ³ /h
Qmax	375,0	m ³ /h
Qboost	610,0	m ³ /h
SPEmin	37	dBa
SPEmax	46	dBa
SPEboost	55	dBa
PO	-	W
PS	0,48	W
PI		
F	1,0	
EEl	57,6	
Qbep	356,0	m ³ /h
Pbep	392	Pa
Qboost	610,0	m ³ /h
Wbep	137,0	W
WL	5,10	W
Emiddle	114	lux
Lwa-SPEmax	46	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.