Cooking Systems & Induction Hobs 2024 — EN

Cooking

From hoods to cooking systems,
Falmec technology
and design create an ideal kitchen
environment, in every sense. A place
where you can breathe
an innovative atmosphere
and savour the pleasure of living.



Index

- 03 Falmec expertise
- 08 Brera
- 22 Zero / Zero Easy
- 36 Quantum Pro / Quantum Pro Easy
- 50 Induction hobs / Dialogue System
- 64 Glossary of functions
- 66 Carbon.Zeo
- 68 Filters / Accessories
- 70 Installation
- 71 Ducting accessories



Falmec expertise


Falmec integrated solutions represent more than 40 years of experience in the kitchen extraction industry. The Italian brand's solid design and construction know-how interpret technologies and needs of the cooking world, creating products of significant engineering value, designed to guarantee a healthy and comfortable home environment.



Functional design

Inspired by the idea of essentiality, ergonomics and elegance, Falmec has conceived and manufactured new solutions that integrate cooking and extraction. A rational and skilful design in which aesthetics and functionality achieve a perfect balance and where every detail counts.

Excellent performances
Cutting-edge cooking
technologies, designed to
last over time thanks to the
use of the best components.
Products in harmony with
contemporary trends
and lifestyles, designed
to guarantee the highest
performance with extreme
silence.

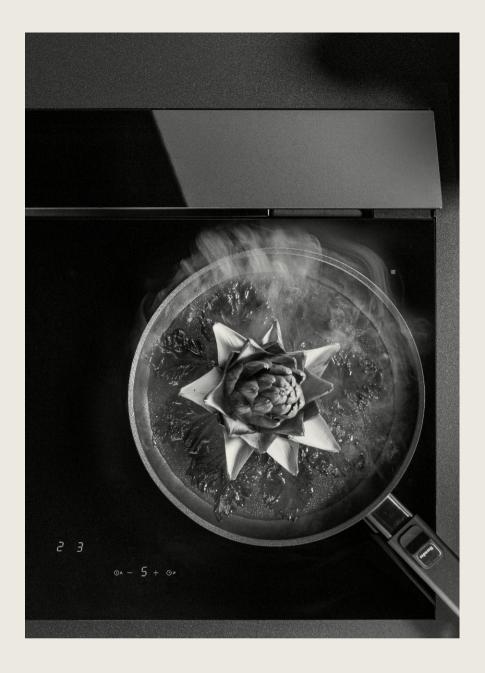



05

Pure air
The unique Carbon.Zeo filter uses materials of natural origin, such as carbon and zeolite, to absorb cooking odours and water vapour most effectively, ensuring a healthy and comfortable home environment.

Cooking systems overview





Brera

Induction hob with integrated suction Extraction / filtering mode 89x52 4 cooking zones Double bridge function

p. 08, 18

Brera 75*

Induction hob with integrated suction Extraction / filtering mode 75x52 3 cooking zones Bridge function

p. 08, 20

*Available from September 2024





Zero

Induction hob with integrated suction Extraction / filtering mode 84x52 4 cooking zones Bridge function

p. 22, 32

Zero Easy

Induction hob with integrated suction Filtering mode 84x52 4 cooking zones Bridge function

p. 22, 34





Quantum Pro

Induction hob with integrated suction Extraction / filtering mode 84x52 4 cooking zones Double bridge function

p. 36, 46

Quantum Pro Easy

Induction hob with integrated suction Filtering mode 84x52 4 cooking zones Double bridge function

p. 36, 48

Induction hobs overview





Induction 58

Induction hob 58x51 Dialogue system ** 4 cooking zones Bridge function

p. 50, 58

Induction 78

Induction hob 78x51 Dialogue system ** 4 cooking zones Bridge function

p. 50, 59





Induction 88 (panoramic)

Induction hob
88x40
Dialogue system
4 cooking zones
Double bridge function

p. 50, 60

Induction 90

Induction hob 90x51 Dialogue system \$\infty\$5 cooking zones Bridge function

p. 50, 61



Invisible technology


Brera sits on the worktop as a single, essential element, on which the cooking and suction zones, defined by a thin gap, are closely aligned, creating a monochromatic effect. When in operation, the back opens automatically to draw in cooking fumes, perfectly balanced across the different zones. This configuration guarantees maximum freedom of use and cooking practicality, thanks to a large, even surface with no obstructions.



More information on Brera





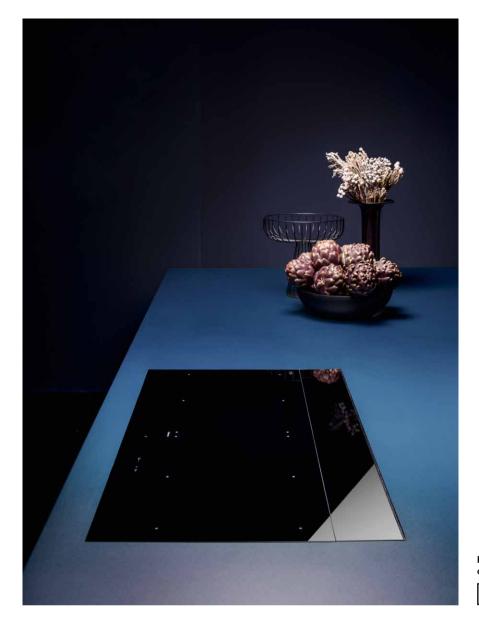

Energy class

A+++

Inside, Brera conceals cuttingedge cooking technology and a powerful brushless motor that guarantees excellent suction performance, silence and energy efficiency. In the filtering version, Brera is equipped with exclusive Carbon.Zeo filters that can be inserted directly from above, for maximum practicality in maintenance.



13



Refined minimalism, with a technological heart



Silent power

The use of a powerful brushless motor (800 m3/h) ensures excellent suction performance, energy efficiency (A+++) and extreme silence, rediscovering the pleasure of living in the kitchen.



Easy cleaning and maintenance

The glass flap opening system conceals the functional part and allows easy cleaning. The antigrease and Carbon.Zeo filters are located in an accessible removable basket.



The best filtration

The Carbon.Zeo filter technology combines the action of active carbon, which traps odours, with the effect of zeolite, which reduces humidity. The filter can be regenerated to guarantee its effectiveness for a minimum of 3 years.



Automatic mode

Suction is automatically adjusted in relation to cooking power, adapting to actual needs and ensuring consumption optimisation.




Invisible technology and essential design

Brera is distinguished by the uniformity of its surface. Thanks to the flush finish between the cooking zone and the suction element with automatic flap opening, aesthetics are elevated to their most essential form.



Obstacle-free cooking

Rear suction works conveniently on a large, continuous, obstacle-free cooking zone. Flex surface technology enables homogeneous cooking even with large pots.

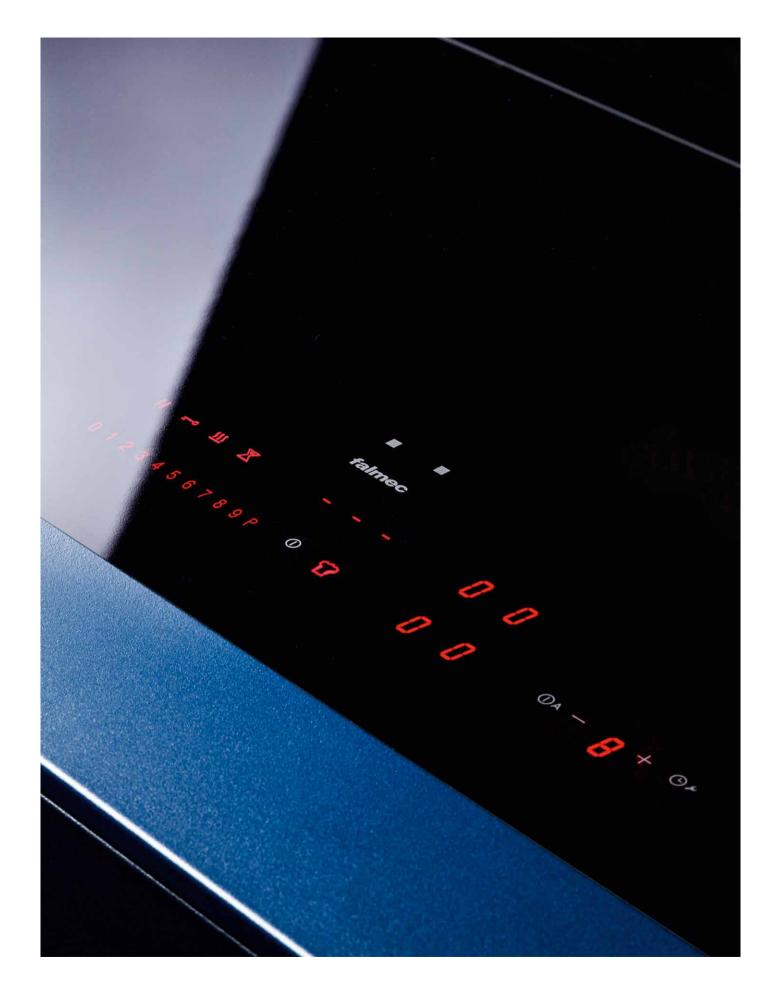

Optimising space

The Brera extraction motor is positioned on the rear side of the structure to optimise the space available inside the cabinet. In fact, this feature allows to make the most of the volume both in height, by offering an additional drawer in the upper part (1), and in depth, in the island version (2), thanks to the possibility of moving the motor to the rear, allowing the insertion of even larger drawers.



Silent performances

Brera is equipped with a powerful "brushless" motor that guarantees excellent suction performance and at the same time extreme silence, which can be further enhanced by the application of the "Silence kit" accessory (3). Brera (4) is also available in a recirculation version (5), with the exclusive Carbon.Zeo regenerable filter kit, which can be inserted from above, directly into the filter basket.





design Falmec Lab

Control

Motor

Installation Worktop

Function Extracting / Filtering

Dimensions

Materials / Finishes Black ceramic glass

Features

Motorised "Flap system" Suction with "Automode" function

Liquid collector

"Flex surface" technology
Carbon.Zeo filter removable from the top

for easy maintenance "Touch slider" control 9 levels + Booster

Power levels from 2.8 kw to 7.4 kw Noise level Min. speed 44 dB(A) Max. speed 65 dB(A)

Brushless 800 m³/h

Metal anti grease filter, removable and washable **Filters**

Carbon.Zeo with saturation level (optional)

Voltage / Frequency 220-240V / 50-60Hz

Net weight 30 kg Energy class A+++ **Cooking zones**

Cooking functions Timer for each cooking zone

Double bridge

"Keep warm" function (44°)

Pause function Chef function Safety control lock Automatic pot detection Residual heat indicator



Cooking zones layout

Dimension 4 x 190 x 210 mm Power 2,1/3 kW


Pot ≥ ø110 mm (single) ≥ 230 mm (bridge)


|--|

Code	Description	Price (€)
8034122900353	Brera - 89 cm - 800 m3/h	3.365,00
Accessories		
KACL.1006	Filter Carbon.Zeo renewable	135,00
KACL.1026	Silence Kit	90,00

Cookware for induction hobs is available on page 69


18 **Falmec**







Frontal view

Top view








Side view with motor in front position (wall installation)

Side view with motor in rear position (island installation)


Side view with motor in rear position with Silence Kit KACL.1026

Type of installation


Topmounted













866

design Falmec Lab

Motor

Installation Worktop

Function Extracting / Filtering

Dimensions

Materials / Finishes Black ceramic glass

Features

Motorised "Flap system"
Suction with "Automode" function

Liquid collector

"Flex surface" technology
Carbon.Zeo Microtech filter removable from the top

for easy maintenance

Control "Touch slider" control 9 levels + Booster

Power levels from 2.8 kw to 7.4 kw Noise level Min. speed 44 dB(A) Max. speed 65 dB(A)

Brushless 800 m³/h

Filters Metal anti grease filter, removable and washable

Carbon.Zeo Microtech with saturation level (optional)

Voltage / Frequency 220-240V / 50-60Hz

Net weight 27 kg Energy class A+++ **Cooking zones** 3

Cooking functions Timer for each cooking zone

Bridge

"Keep warm" function (44°)


Pause function Chef function Safety control lock Automatic pot detection Residual heat indicator



Cooking zones layout

Dimension 1 x ø265 mm 2 x 190 x 210 mm Power 2,3 / 3 kW 2,1/3 kW Pot

≥ ø130 mm ≥ ø110 mm (single) ≥ 230 mm (bridge)





Code	Description	Price (€)
8034122901039*	Brera - 75 cm - 800 m3/h	2.915,00
Accessories		
KACL.1037	Filter Carbon.Zeo Microtech renewable	108,00
KACL.1026	Silence Kit	90,00

Cookware for induction hobs are available on page 69

20 **Falmec**


^{*}Available from September 2024







Frontal view

Top view








Side view with motor in front position (wall installation)

Side view with motor in rear position (island installation)


Side view with motor in rear position with Silence Kit KACL.1026

Type of installation


Topmounted








Cut-out size





Zero

Versatile integration
Zero is characterised by a clean,
minimalist design that allows perfect
integration into the kitchen worktop.
The central suction part has a glass panel
that can be moved to centralise the air
flow where it is needed. The hob
is equipped with inductors featuring
"Flex surface" technology to accommodate
different sizes and types of pots and pans.
Its perfectly smooth design and access
from above to the functional area ensures
easy cleaning and maintenance.



More information on Zero







25 Zero





Air Slide System
The suction can be directed as required, thanks to a slider that allows the airflow to be concentrated according to the position of the pan. This element can be quickly lifted to access the grease and odour filters, both of which can be easily removed from above from above.

Zero 27



Clean aesthetics, functionality and absolute precision



Flat design

With its elegant interplay of geometrics, Zero is characterised by the rigour of its design, which is clean and unobtrusive and allows perfect integration into the kitchen worktop.



Air Slide System

The suction is oriented according to the need thanks to a sliding element that allows the suction power to be focused towards the position of the pan. Suction is precise and consumption is reduced.



Simplified installation and maintenance

Zero Easy is the "plug-and-play' version with a rear outlet that is easy to install as it requires no ducting. This configuration enables full use of the cabinet. The odour filter integrated in the suction body is removable from above for easy maintenance.



Cleaning convenience

The sliding suction element also serves as a handle for maintenance and cleaning of the grill, the odour filter and the tray for collecting liquids.




The best filtration

The Carbon.Zeo filter technology combines the action of active carbon, which traps odours, with the effect of zeolite, which reduces humidity. The filter can be regenerated to guarantee its effectiveness for a minimum of 3 years.



Automatic mode


Suction is automatically adjusted in relation to cooking power, adapting to actual needs and ensuring consumption optimisation.

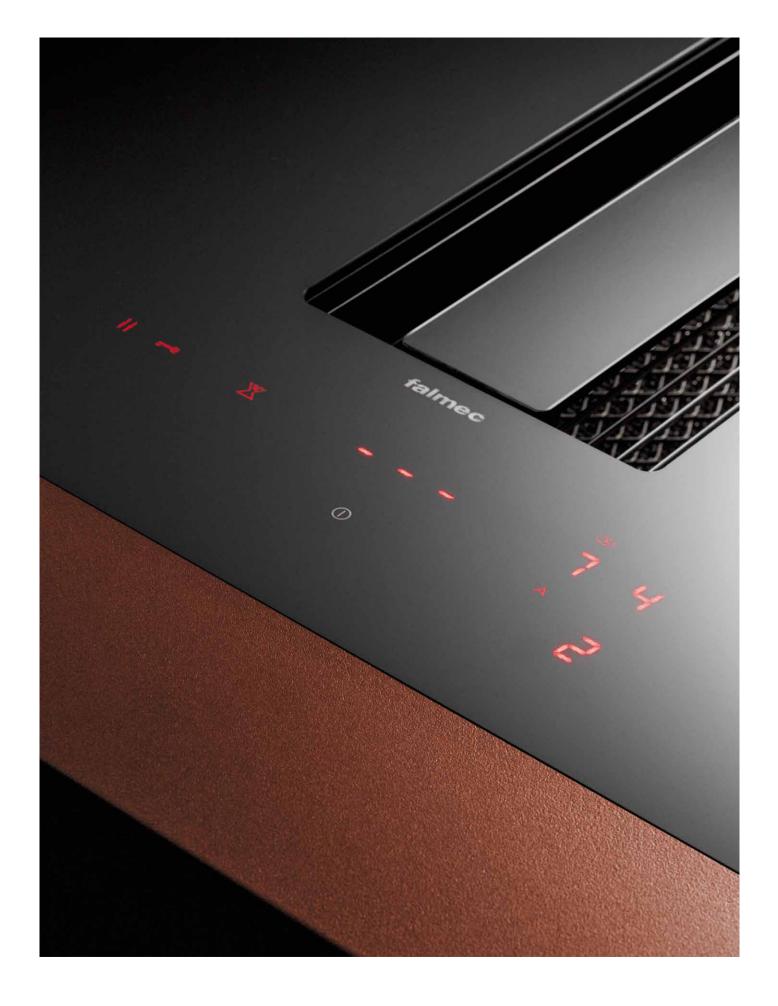

29 Zero

Zero

In extraction mode, Zero directs air outwards through a duct hidden in the cabinet (1). At any time it is possible to add the Carbon.Zeo filter kit (2) which allows the reduction of odours and humidity from cooking fumes, thanks to the natural properties of carbon and zeolite.

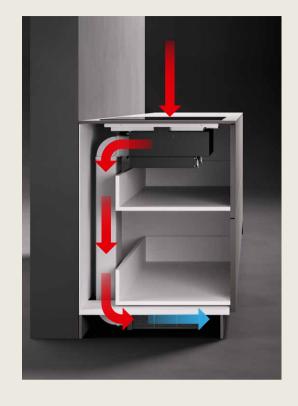



Zero Easy

Zero is also available in the Easy version (3), with exclusive Carbon.Zeo filter incorporated in the structure and direct outlet at the rear, to make the best use of the cabinet space in depth. Its extreme simplicity allows both "plug-and-play" installation, as well as very easy maintenance, thanks to the extraction of the Carbon.Zeo filter directly from above.





31 Zero

Zero

design Falmec Lab

Motor

Installation Worktop

Function Extracting / Filtering

Dimensions 84 cm

Materials / Finishes Black ceramic glass



Features Air Slide System

Suction with "Automode" function

Liquid collector

"Flex surface" technology

Control "Touch slider" control

9 levels + Booster

 Power levels
 from 2.8 kw to 7.4 kw

 Noise level
 Min. speed 46 dB(A)

 Max. speed 64 dB(A)

Brushless 600 m³/h

Filters Metal anti grease filter, removable and washable

Carbon.Zeo with saturation level (optional)

Voltage / Frequency 220-240V / 50-60Hz

Net weight28 kgEnergy classA+Cooking zones4

Cooking functions Timer for each cooking zone

Bridge

"Keep warm" function (44°)
Pause function

Pause function
Chef function
Safety control lock
Automatic pot detection
Residual heat indicator



Cooking zones layout

 Dimension
 2 x 210 x 190 mm

 Power
 2,1 / 3 kW

 Pot
 ≥ ø110 mm (single)

 ≥ 230 mm (bridge)


1 x ø175 mm 1,4 / 2,1 kW ≥ ø90 mm 1 x ø215 mm 2,3 / 3 kW ≥ ø110 mm







Code	Description	Price (€)
8034122900933	Zero - 84 cm - Extracting - 600 m3/h	2.641,00
Accessories		
KACL.930	Filter unit kit under base h100 mm (extracting version)	415,00
KACL.951	Filter unit kit under base Slim h60 mm (extracting version)	529,00
KACL.955	Grid for air outlet (filter unit kit under base Slim - h60mm)	40,00
KACL.155#NF	Black frame	160,00

Cookware for induction hobs is available on page 69








Frontal view Side view Top view

Type of installation


Topmounted








Cut-out size





33 Zero

Zero Easy

design Falmec Lab

Motor

InstallationWorktopFunctionFilteringDimensions84 cm

Materials / Finishes Black ceramic glass



Features Air Slide System

Suction with "Automode" function

Liquid collector

"Flex surface" technology

Control "Touch slider" control

9 levels + Booster

 Power levels
 from 2.8 kw to 7.4 kw

 Noise level
 Min. speed 46 dB(A)

 Max. speed 64 dB(A)

Brushless 600 m³/h

Filters Carbon.Zeo with saturation level

Voltage / Frequency 220-240V / 50-60Hz

Net weight28 kgEnergy classA+Cooking zones4

Cooking functions Timer for each cooking zone

Bridge

"Keep warm" function (44°)

Pause function
Chef function
Safety control lock
Automatic pot detection
Residual heat indicator



Cooking zones layout

 Dimension
 2 x 210 x 190 mm

 Power
 2,1 / 3 kW

 Pot
 ≥ ø110 mm (single)

 ≥ 230 mm (bridge)


1 x Ø175 mm 1,4 / 2,1 kW ≥ Ø90 mm 1 x ø215 mm 2,3 / 3 kW ≥ ø110 mm







Code	Description	Price (€)
8034122900940	Zero Easy - 84 cm - Filtering - 600 m3/h	2.722,00
Accessories		
KACL.965	Carbon.Zeo filter (spare part)	135,00
KACL.1036	Anti-noise conveyer	75,00
KACL.155#NF	Black frame	160,00

Cookware for induction hobs is available on page 69








Frontal view

Rear view


Top view




Side view

Type of installation


Topmounted







Cut-out size



Min 45 Min 49 Min 40 Min 40 Min 49 Min 40 Mi




Quantum Pro

Advanced performance
Quantum Pro has a minimalist design,
enhanced by a central element with
opening glass flaps that gives it a
professional yet elegant appeal. Every
construction and technological detail is
designed to combine excellent
performance in terms of suction and
low noise levels. Quantum Pro is also
available in an Easy version that offers
maximum ease of installation and
maintenance, thanks to the Carbon.Zeo
filter integrated in the hood body and
the direct outlet at the rear.



More information on Quantum Pro



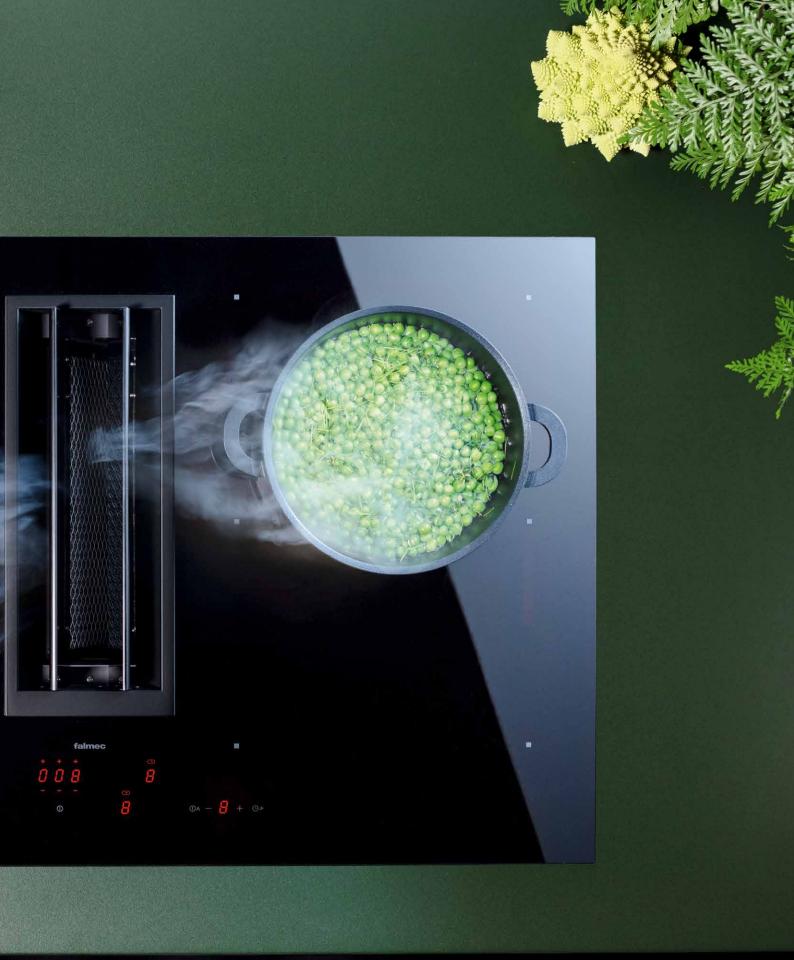

Automatic flaps
The glass flaps open
automatically to improve the
aerodynamics of the incoming
air, enabling better suction
efficiency. Once closed, the
system achieves perfect
colour uniformity on the
surface, hiding the functional
part, with a pleasant aesthetic
effect.





Design uniformity, performance versatility



Flap System

The suction area is opened by two glass flaps that give uniformity of colour throughout the cooking area when closed. The scratch-resistant black steel frame that defines the suction zone is designed to prevent accidental liquid spillage during cooking.



Flex surface

The Flex surface technology of Quantum Pro includes a double bridge function that allows extremely versatile use even with large pans.



Simplified installation

Quantum Pro Easy is the plugand-play version with a rear outlet simple to install as it requires no ducting. This configuration makes full use of the cabinet depth.



Cleaning convenience

The glass flap opening system conceals the functional part and allows easy cleaning.




The best filtration

The Carbon.Zeo filter technology combines the action of active carbon, which traps odours, with the effect of zeolite, which reduces humidity. The filter can be regenerated to guarantee its effectiveness for a minimum of 3 years.



Automatic mode


Suction is automatically adjusted in relation to cooking power, adapting to actual needs and ensuring consumption optimisation.

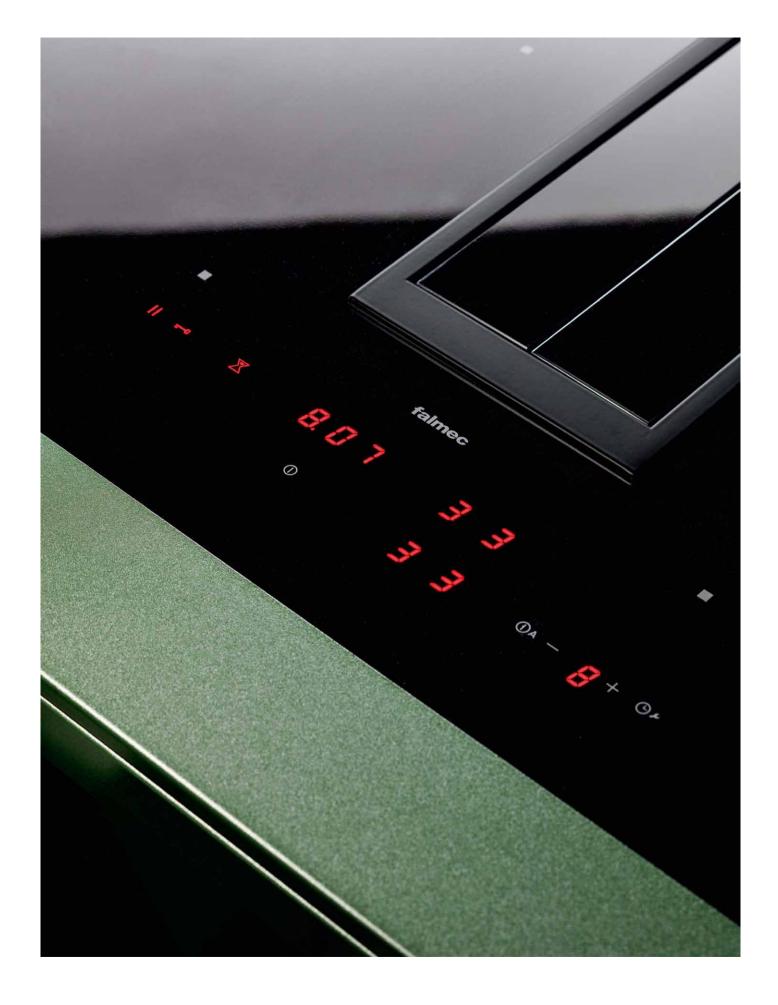

43 Quantum Pro

Quantum Pro

In extraction mode, Quantum Pro directs air outwards through a duct hidden in the cabinet (1). At any time it is possible to add the Carbon.Zeo filter kit (2) which allows the reduction of odours and humidity from cooking fumes, thanks to the natural properties of carbon and zeolite.

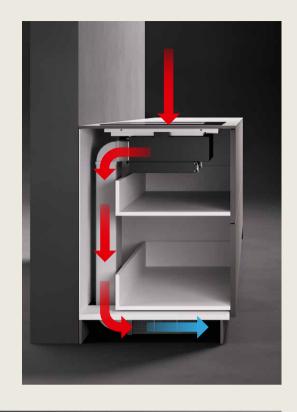






Quantum Pro Easy

Quantum Pro is also available in the Easy version (3). With exclusive Carbon.Zeo filter incorporated in the structure and direct outlet at the rear, it offers maximum practicality in installation and makes the best use of the cabinet depth. In addition, its extreme simplicity allows for easy maintenance.

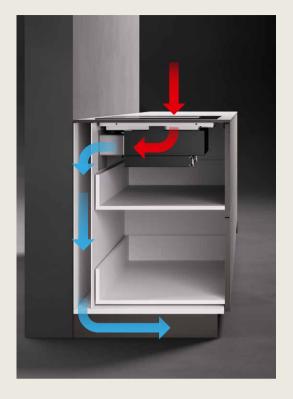



45 Quantum Pro

Quantum Pro

design Falmec Lab

Installation Worktop

Function Extracting / Filtering

Dimensions

Materials / Finishes Black ceramic glass

Features

Motorised "Flap system" Suction with "Automode" function

Liquid collector

"Flex surface" technology

Control "Touch slider" control

9 levels + Booster

Power levels from 2.8 kw to 7.4 kw Min. speed 46 dB(A) Noise level

Max. speed 64 dB(A)

Motor

Filters Metal anti grease filter, removable and washable

Carbon.Zeo with saturation level (optional)

220-240V / 50-60Hz Voltage / Frequency

Net weight 27 kg Energy class Α+ Cooking zones

Cooking functions Timer for each cooking zone

Double bridge

"Keep warm" function (44°)
Pause function Chef function Safety control lock Automatic pot detection Residual heat indicator



Cooking zones layout

Dimension 4 x 210 x 190 mm 2,1 / 3 kW Power


≥ ø110 mm (single)


≥ 230 mm (bridge)






Code	Description	Price (€)
8034122900339	Quantum Pro - 84 cm - Extracting - 600 m3/h	2.949,00
Accessories		
KACL.930	Filter unit kit under base h100 mm (extracting version)	415,00
KACL.951	Filter unit kit under base Slim h60 mm (extracting version)	529,00
KACL.955	Grid for air outlet (filter unit kit under base Slim - h60mm)	40,00
KACL.155#NF	Black frame	160,00









Top view

Type of installation


Topmounted



Flushmounted



Cut-out size



Min 45 Min 45 Min 45 Min 46 Min 46 Min 46 Min 46 Min 45 Min 49 Min 40 Mi

Quantum Pro Easy

design Falmec Lab

Motor

InstallationWorktopFunctionFilteringDimensions84 cm

Materials / Finishes Black ceramic glass



Features Motorised "Flap system"

Motorised "Flap system"
Suction with "Automode" function

Liquid collector

"Flex surface" technology

Control "Touch slider" control

9 levels + Booster

 Power levels
 from 2.8 kw to 7.4 kw

 Noise level
 Min. speed 46 dB(A)

 Max speed 64 dB(A)

Max. speed 64 dB(A) Brushless 600 m³/h

Filters Carbon.Zeo with saturation level

Voltage / Frequency 220-240V / 50-60Hz

Net weight26 kgEnergy classA+Cooking zones4

Cooking functions Timer for each cooking zone

Double bridge

"Keep warm" function (44°)

Pause function Chef function Safety control lock Automatic pot detection Residual heat indicator




Cooking zones layout


 Dimension
 4 x 210 x 190 mm


 Power
 2,1 / 3 kW


ot ≥ ø110 mm (single) ≥ 230 mm (bridge)



Code	Description	Price (€)
8034122900346	Quantum Pro Easy - 84 cm - Filtering - 600 m3/h	3.030,00
Accessories		-
KACL.963	Carbon.Zeo filter (spare part)	133,00
KACL.1036	Anti-noise conveyer	75,00
KACL.155#NF	Black frame	160,00








Frontal view

Rear view


Top view




Side view

Type of installation


Topmounted



Flushmounted



Cut-out size



min 600 min 600 min 45 min 45



Induction hobs

The best match

Falmec offers a new collection of induction hobs, specifically created to integrate with the design and functionality of its hoods. Maximum precision in temperature management, rapidity in reaching the perfect cooking point, dimensions suitable for all space and movement requirements: with Falmec induction hobs it is easy to achieve extraordinary results in the kitchen.

51 Induction hobs





Dialogue System

Connectivity between cooker hood and hob
Through the Dialogue System it is now

Through the Dialogue System it is now possible to control the different functions of the hood directly from the hob, where a touch control has been integrated.

The dialogue between hob and cooker hood takes place via radio frequency and does not require any other receiving devices to be installed in the hood.

Dialogue System

The Dialogue System is compatible with all Falmec hoods that are designed to be radio-controlled. In automatic operation the Dialogue System independently adjusts the suction power according to actual need, guaranteeing extreme ease of use and the best ratio between consumption and performance.







Induction hob 58 cm



Induction hob 78 cm



Panoramic induction hob 88 cm



Induction hob 90 cm

Induction hob 58 cm

design Falmec Lab

Installation Worktop **Dimensions** 58 cm

Materials / Finishes Black ceramic glass



Features "Flex Surface" technology

Control "Touch slider" control

Dialogue System 🛜

Power levels from 2.8 kw to 7.4 kw Voltage / Frequency

220-240V / 50-60Hz

Net weight 9 kg **Cooking zones**

Cooking functions Timer for each cooking zone


"Keep warm" function (44°)


Pause function Chef function Safety control lock Automatic pot detection Residual heat indicator




Cooking zones layout

Dimension 2 x 210 x 190 mm 1 x ø175 mm 1 x ø215 mm 1,4 / 2,1 kW 2,3 / 3 kW Power 2,1 / 3 kW Pot ≥ ø110 mm (single) ≥ ø90 mm ≥ ø110 mm









≥ 230 mm (bridge)










Frontal view

Side view

Cut-out size







Top view

Code	Description	Price (€)
8034122900896	Induction hob 58 cm - 4 cooking zones	965,00

Induction hob 78 cm

design Falmec Lab

Installation Worktop **Dimensions** 78 cm

Materials / Finishes Black ceramic glass



Features "Flex Surface" technology

Control "Touch slider" control

Dialogue System 🛜

Power levels from 2.8 kw to 7.4 kw Voltage / Frequency 220-240V / 50-60Hz

Net weight 11 kg **Cooking zones** 4

Timer for each cooking zone **Cooking functions**

Bridge "Keep warm" function (44°)

Pause function Chef function


Safety control lock Automatic pot detection Residual heat indicator





Cooking zones layout


Dimension 2 x 210 x 190 mm 1 x ø215 mm 1 x ø265 mm 2,3 / 3 kW 2,3 / 3 kW Power 2,1 / 3 kW Pot ≥ ø110 mm (single) ≥ ø110 mm ≥ ø130 mm

≥ 230 mm (bridge)











Type of installation





Frontal view

Side view

Cut-out size







Top view

Code	Description	Price (€)
8034122900902	Induction hob 78 cm - 4 cooking zones	1.095,00

Induction hob 88 cm (panoramic)

design Falmec Lab

Installation Worktop **Dimensions** 88 cm

Materials / Finishes Black ceramic glass



Features "Flex Surface" technology

Control "Touch slider" control

Dialogue System 🛜

Power levels from 2.8 kw to 7.4 kw Voltage / Frequency

220-240V / 50-60Hz

Net weight 10 kg **Cooking zones**

Cooking functions Timer for each cooking zone

Double bridge "Keep warm" function (44°)

Pause function Chef function Safety control lock Automatic pot detection Residual heat indicator



Cooking zones layout


Dimension 4 x 190 x 210 mm Power 2,1 / 3 kW

Pot ≥ ø110 mm (single) ≥ 230 mm (bridge)



Flushmounted






Frontal view




Top view


Type of installation

Topmounted



Cut-out size





Code	Description	Price (€)
8034122900919	Induction hob 88 cm - 4 cooking zones	1.355,00

Cookware for induction hobs is available on page 69

Side view

Induction hob 90 cm

design Falmec Lab

InstallationWorktopDimensions90 cm

Materials / Finishes Black ceramic glass



Features "Flex Surface" technology

Control "Touch slider" control

Dialogue System 🐬

Power levels from 2.8 kw to 7.4 kw

Voltage / Frequency 220-240V / 50-60Hz

Net weight 14 kg Cooking zones 5

Cooking functions Timer for each cooking zone

Bridge

"Keep warm" function (44°)

Pause function
Chef function
Safety control lock
Automatic pot detection
Residual heat indicator



Cooking zones layout


 Dimension
 2 x 210 x 190 mm
 1 x Ø265 mm
 2 x Ø175 mm

 Power
 2,1 / 3 kW
 2,3 / 3 kW
 1,4 / 2,1 kW

 Pot
 ≥ Ø110 mm (single)
 ≥ Ø130 mm
 ≥ Ø90 mm

400


474




-

Type of installation

Topmounted





Frontal view


Side view


≥ 230 mm (bridge)

Cut-out size



849






Top view

Code	Description	Price (€)
8034122900926	Induction hob 90 cm - 5 cooking zones	1 495 00

Technical data and accessories

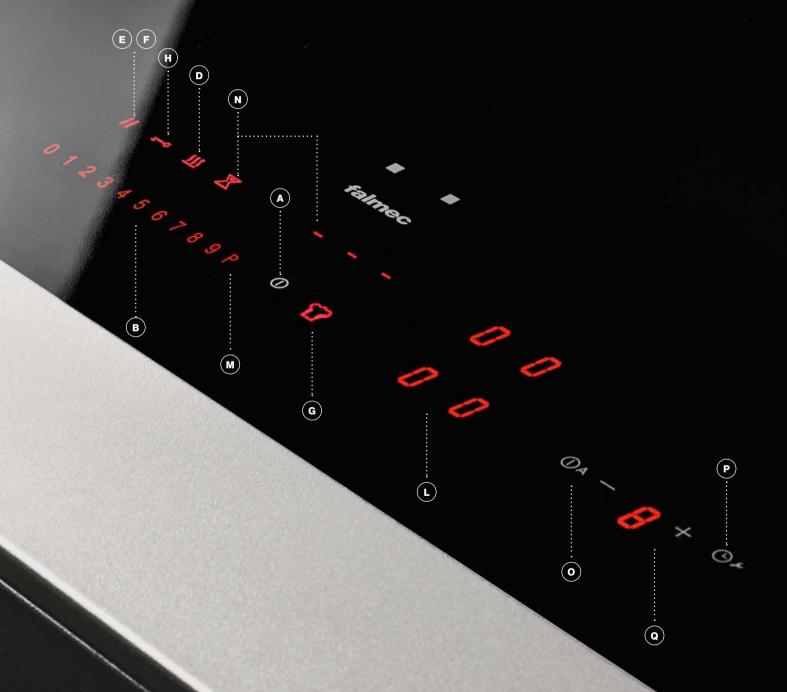

Glossary of functions

Cooking

A. Turn on and switch off (Induction hob)

B. Touch slider control

C. Bridge

Allows simultaneous use of two cooking zones for rectangular and oval pans

D. Keep Warm

Keeps food warm thanks to a temperature of 44 °C

E. Pause

Suspends operation of all cooking zones

F. Recall

Recovers previous cooking settings after accidental switch-off

G. Chef

setting

Enables all available cooking zones to be used with different preset power levels

H. Safety control lock Control lock to prevent accidental operation

I. Automatic pot detection Recognises when the pot is placed on the cooking surface. Automatically switches on the zone and simultaneously illuminates the corresponding

power selector, enabling the

L. Cooking zone power level / Residual heat indicator If the surface of the hob is still hot after cooking

is still hot after cooking the display will show the letter H

M. Boost (Heat up) Increases the power of a single cooking zone allowin

of a single cooking zone allowing rapid and intense heat

N. Timer

Function for each cooking zone or independent. It allows time to be set, at the end of which an acoustic signal is emitted


Suction

O. Turn on and switch off (hood)
/ Automatic suction (Automode)
Suction power
is adapted to the cooking

P. Switch-off timer / Maintenance

With the hood in operation it switches the suction off after 15 minutes / When the hood is off, maintenance is started

Q. Touch control Sets suction power

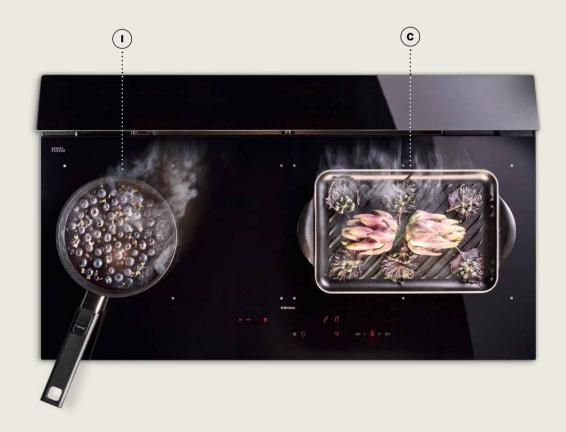

Carbon.Zeo

Falmec's unique combined Carbon. Zeo filter uses materials of natural origin, such as zeolite and activated carbon, to trap odours with maximum effectiveness.

Carbon

Activated carbon is a material containing mainly carbon in the form of graphite micro-crystals, which are treated to obtain a porous structure with a large internal surface area. Thanks to these characteristics, they are able to hold many types of substances, attracting their molecules and absorbing them internally.

Zeolite


Zeolite is a mineral with a high capacity to absorb organic compounds and water vapour. This property results directly from the microporosity of its crystalline structure. Furthermore, zeolite, due to its chemical characteristics, releases heat on contact with humidity, reducing it. The use of zeolite is therefore very important both to reduce odours and to absorb water vapour from cooking

Long life

The Carbon.Zeo combination filter has a very long service life: approx. 3 years with normal use of the hood.



66

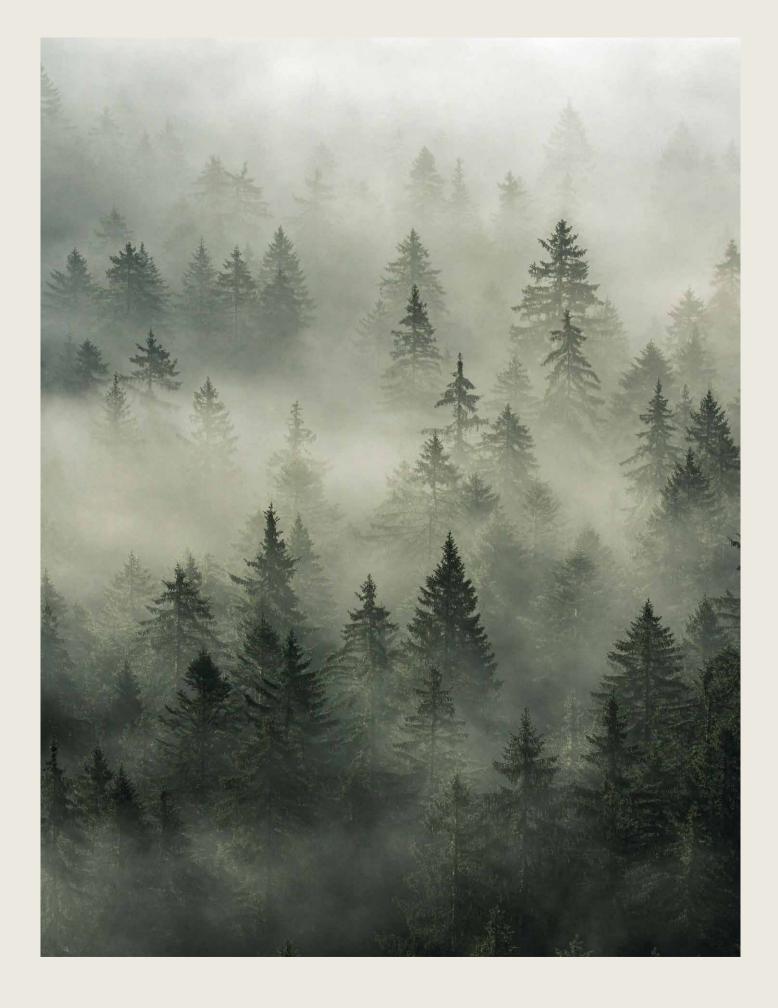

Anti-odour filter kit

Under base filter unit


Under base filter solutions are equipped with Carbon.Zeo technology and are installed under the kitchen plinth to enhance the filtering capacity of Falmec's solutions.

Under base Slim filter unit (h 60 mm)

This solution is designed to achieve the best filtration performance even in kitchens with a plinth lowered in height by up to 6 cm. This solution uses a honeycomb charcoal filtration technology that is renewable allowing a service life of 5 years.

Filter unit kit Under base KACL.930 - 415 € Carbon.Zeo Filter spare parts KACL.931 - 251€

Under base Slim

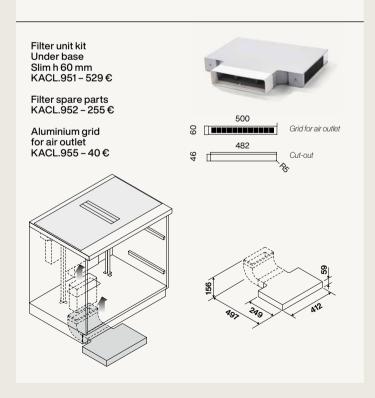


68 Falmec

Accessories / spare filters

Brera	Silence Kit	Cart	oon.Zeo filters
	KACL.1026 - 90 € (Brera)	Accessories	Spare parts
	It for the rimeroves the silenes	KACL.1006 - 135 € (Brera 90)	KACL.963 - 133 € (Quantum Pro Easy)
	It further improves the silence of Brera hob	KACL.1037 - 108 € (Brera 75)	KACL.965 - 135 € (Zero Easy)




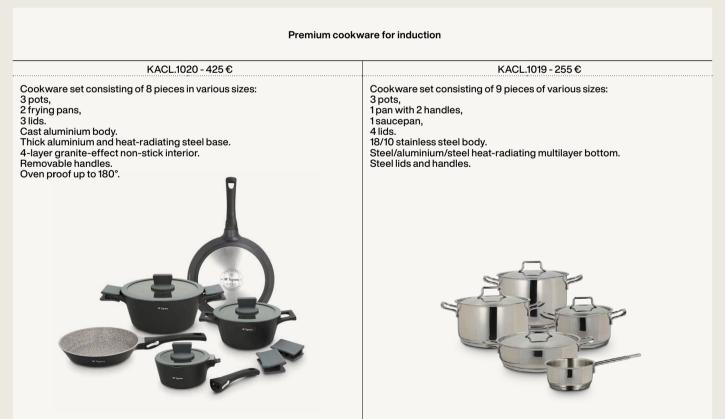


Installation

In order for the product to function optimally, correct installation in the kitchen unit is essential. To facilitate its operation Falmec offers several options with and without ducting.


The hobs with integrated extraction have a series of components included in the package, designed to meet the main installation requirements. For more complex configurations, a range of accessory ducting is also available.




KACL.1036 - 75 €

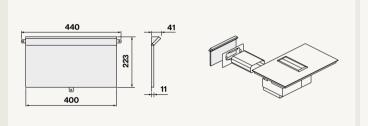


Zero




Zero Easy




Brera

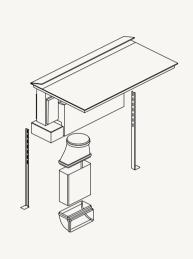

Quantum Pro



Quantum Pro Easy



70

Ducting accessories

Circular / flat bend	Horizontal / flat elbow	Round bend	Vertical / rectangular elbow
KACL.371ø150/220x90	KACL.367 220x90	KACL.391ø150	KACL.369 220x90
Rigid flat pipe	Rigid round pipe	Flat junction	Round junction
KACL.352 220x90x1200	KACL.358 ø150x1200	KACL.356 220x90	KACL.380 ø150
		l	
Circular / flat connector	Flexible ducting belt	Rectangular duct holder	Aluminium pipe extendable to up to 3 m
Circular / flat connector KACL.376 ø150/220x90	Flexible ducting belt KACL.364 ø150	Rectangular duct holder KACL.362 220x90	Aluminium pipe extendable to up to 3 m KACL.360 ø150 x 800-3000
			to up to 3 m
			to up to 3 m
			to up to 3 m
KACL.376 ø150/220x90			to up to 3 m

Falmec S.p.A

via dell'Artigianato, 42 z.i. 31029 Vittorio Veneto Treviso — Italy info@falmec.com falmec.com Images Nudesign

Photo and styling
Eye Studio / Beppe Mangia

Graphic Design Designwork

Texts editing
Daniele Varelli / Dana Cukier

Post-production photos and colour separation Luce Group

Printed in Italy ©April 2024

Falmec declines all responsibility for any inaccuracies contained in this catalogue that are due to typos and copying errors.

Falmec Spa hereby reserves the right to make - at any moment and without prior notice - all the technical, aesthetic and fuctional alterations to the products that it believes necessary for their improvement.

Models, images and technical solutions presented in this catalogue are protected by industrial property rights.

The printing process does not always permit a faithful reproduction of original tones and materials.

This catalogue is the exclusive property of Falmec Spa. All rights are reserved. Any form of total or partial reproduction of this catalogue is stricty forbidden.